




POINT-OF-PURCHASE DISPLAY & MOUNTING SOLUTIONS

CREATING EYE-CATCHING SOLUTIONS

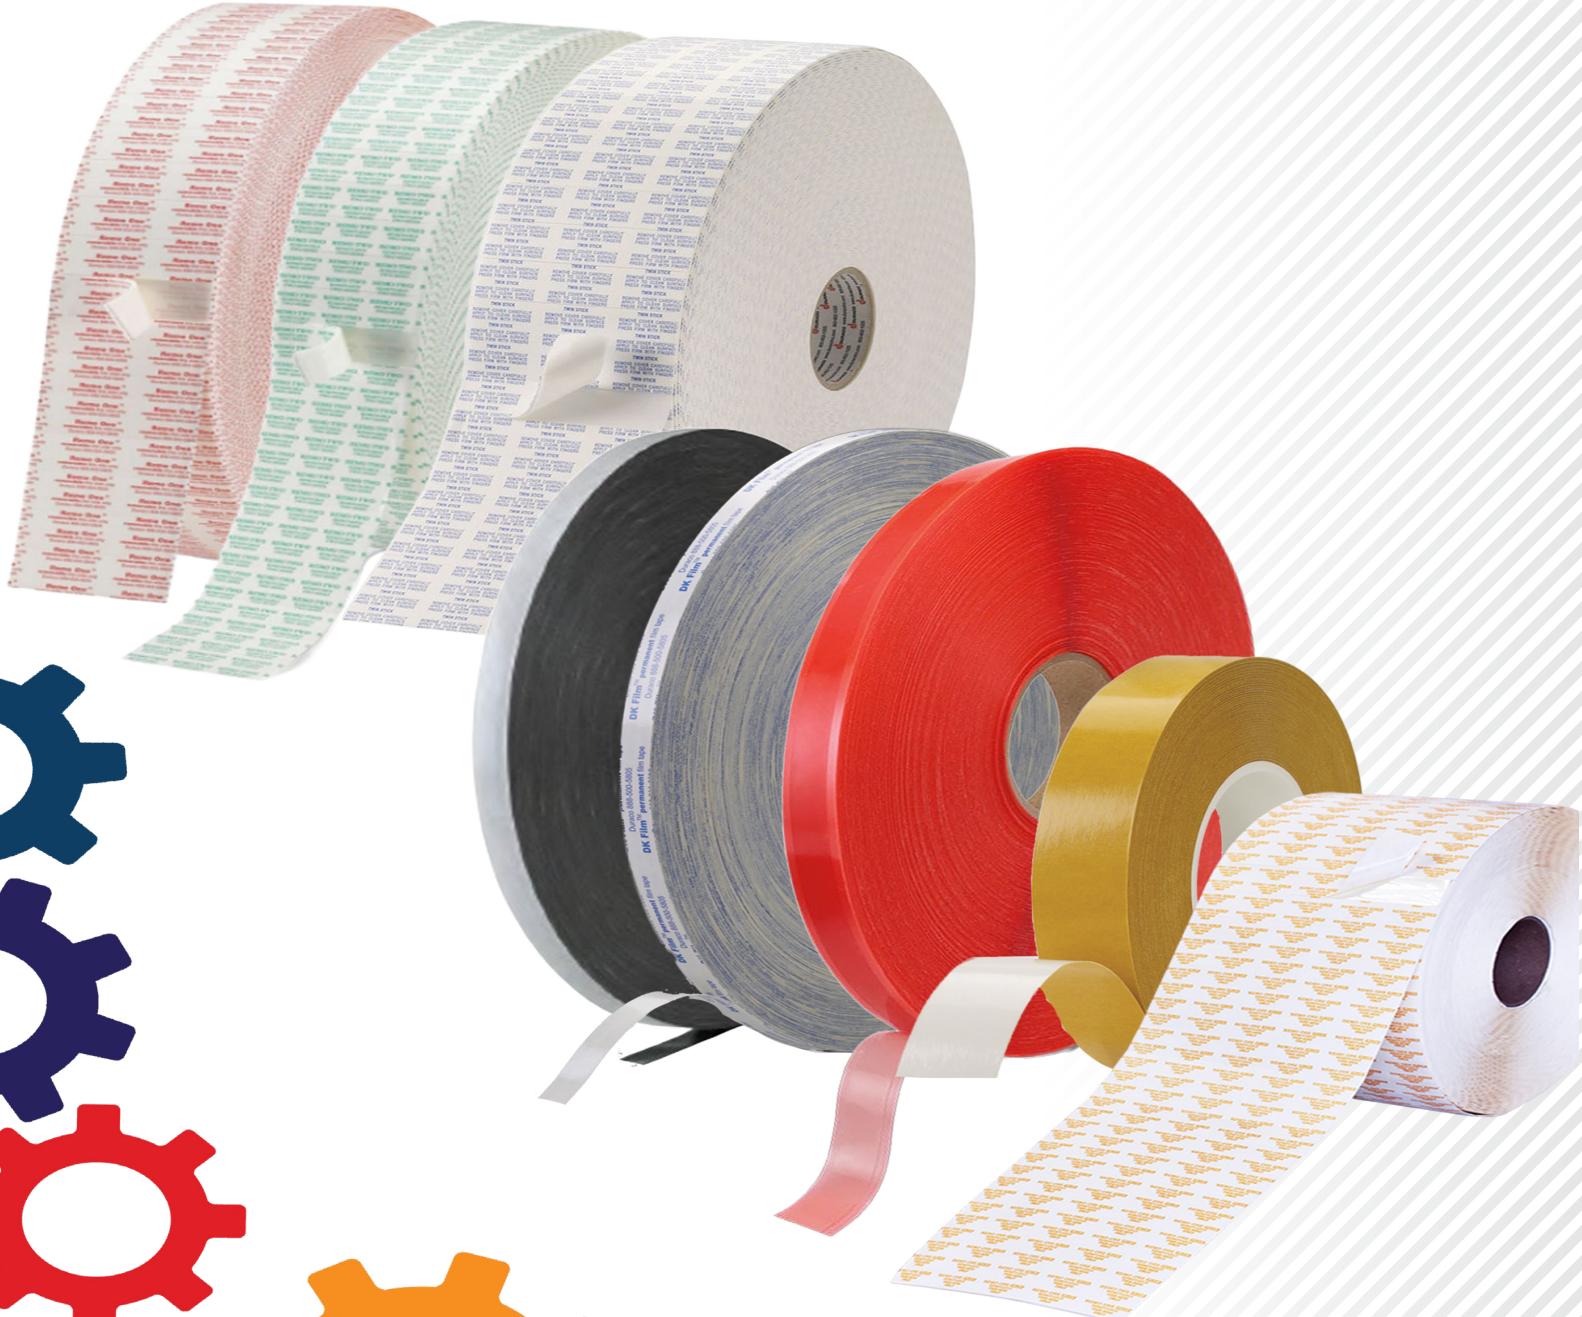

Filmquest



ABOUT DURACO SPECIALTY MATERIALS

OVERVIEW

- 75 years in service
- 300+ employees
- 6,800 customers

MANUFACTURING

- Duraco HQ: Forest Park, IL
- Filmquest: Bolingbrook, IL
- Infinity Tapes HQ: Lawrence, MA
- 3 Sigma: Troy, OH & Lancaster, OH
- Rayven: St. Paul, MN & Owatonna, MN
- Strata-Tac: St. Charles

Advanced Warehousing

- Forest Park, IL
- Lawrence, MA
- Los Angeles, CA
- Mississauga, Canada

CAPABILITIES:


- Coating, laminating, slitting, die-cutting, and custom conversion
- R&D, design engineering, quality, and regulatory compliance
- Advance warehousing and fulfillment support
- Same day shipping

BROAD, ESTABLISHED CUSTOMER BASE:

- Point-of-purchase (POP), decorative and consumer, flexible packaging, general distribution, general industrial and construction, graphics and communication, healthcare, OEM manufacturing, specialty label, transit packaging and e-commerce



FIVE COMPANIES, ONE VISION, ONE FOCUS, ONE DURACO

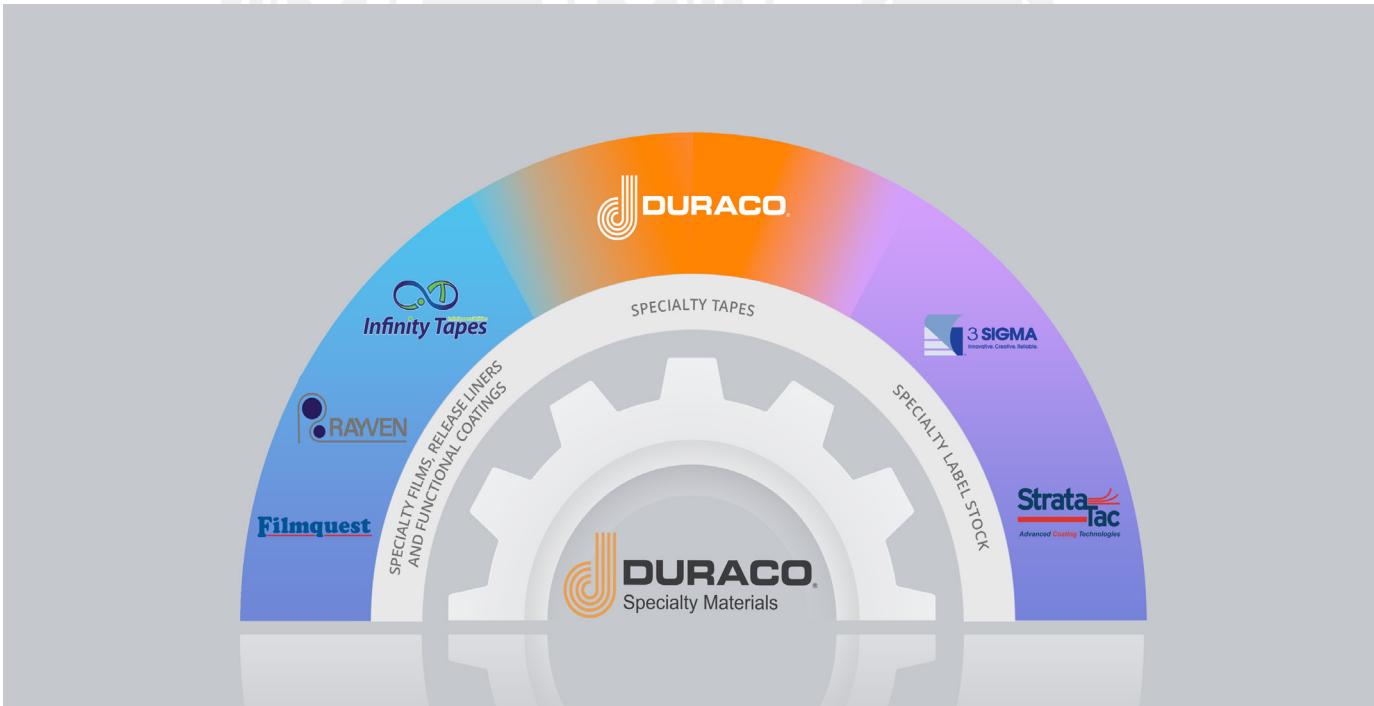

Duraco Specialty Materials and its three business units – Duraco Direct, Duraco Specialty Films & Labels, and Duraco Specialty Coatings & Liners – is dedicated to meeting the unique needs of our customers with best-in-class service and responsiveness.

Scan the QR code to learn more about these innovative and complementary companies.



Filmquest



SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

| | |
|---------------------------------|----|
| TWIN STICK®..... | 5 |
| THICK TWIN STICK®..... | 15 |
| TWIN STICK® LSE..... | 18 |
| DUBL KOTE®..... | 19 |
| DUBL KOTE® ACRYLIC | 23 |
| DUBL KOTE® LSE..... | 25 |
| DK FILM® | 26 |
| DK FILM® ACRYLIC..... | 29 |
| DK FILM® HI-TACKACRYLIC..... | 30 |
| DK FILM® LSE..... | 31 |
| DURACO® GOLD..... | 32 |
| DURACO® RED..... | 33 |
| DURACO® RED FINGER LIFT..... | 34 |
| NOSKID FOAM..... | 35 |
| HOOK AND LOOP® FASTENERS..... | 38 |
| HOOK AND LOOP® LOW PROFILE..... | 42 |
| THICK HOOK AND LOOP® | 43 |
| SEW ON HOOK AND LOOP® | 44 |
| DURACO® MAGNETIC TAPE..... | 45 |
| 4481..... | 47 |
| 4581..... | 48 |
| 4582..... | 49 |
| DSTF FINGER LIFT..... | 50 |
| SR1 & SR5..... | 51 |
| RE3 & RE5..... | 52 |
| REP4 & REP16..... | 53 |
| REMO ONE®..... | 54 |
| REMO ONE® PLUS..... | 61 |
| THICK REMO ONE® | 62 |
| REMO TWO® CLEAR..... | 64 |
| REMO TWO® | 65 |
| THICK REMO TWO® | 68 |
| PRESSURE SENSITIVE LABELS..... | 71 |

PERMANENT MOUNTING APPLICATIONS

| | |
|------------------------------|-----|
| TWIN STICK®..... | 72 |
| THICK TWIN STICK®..... | 82 |
| TWIN STICK® LSE..... | 85 |
| DUBL KOTE®..... | 86 |
| DUBL KOTE® ACRYLIC | 90 |
| DUBL KOTE® LSE..... | 92 |
| DK FILM® | 93 |
| DK FILM® ACRYLIC..... | 96 |
| DK FILM® HI-TACKACRYLIC..... | 97 |
| DK FILM® LSE..... | 98 |
| DURACO® HIGH BOND..... | 99 |
| DURACO® GOLD..... | 102 |
| NOSKID FOAM..... | 103 |

| | |
|--------------------------------|-----|
| 4481..... | 106 |
| 4581..... | 107 |
| 4582..... | 108 |
| DSTF FINGER LIFT..... | 109 |
| PRESSURE SENSITIVE LABELS..... | 110 |

REMOVABLE MOUNTING APPLICATIONS

| | |
|--------------------------------|-----|
| REMO ONE® | 111 |
| REMO ONE® PLUS..... | 118 |
| THICK REMO ONE®..... | 119 |
| REMO TWO® CLEAR..... | 121 |
| REMO TWO® | 122 |
| THICK REMO TWO® | 125 |
| SR1 & SR5..... | 128 |
| RE3 & RE5..... | 129 |
| REP4 & REP16..... | 130 |
| PRESSURE SENSITIVE LABELS..... | 131 |

RELEASE LINERS

| | |
|------------------------------------|-----|
| INFINITY PAPER RELEASE LINERS..... | 132 |
| INFINITY FILM RELEASE LINERS..... | 133 |
| RAYVEN PAPER RELEASE LINERS..... | 134 |
| RAYVEN FILM RELEASE LINERS..... | 135 |



TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Duraco's Foam Tapes have a flexible foam carrier that fills gaps and allows irregular surfaces to be adhered.



WHERE TO USE TWIN STICK®

- Semi-permanent displays
- Temporary displays
- Signage
- Caps and headers
- Corrugate
- Chipboard
- Wood
- Low surface energy plastics
- Powder-coated materials
- UV coatings

TWIN STICK®

POP favorite, double-sided permanent foam tape

Specifications

- Adhesive: Rubber-based permanent on both sides (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Holding Power: 1 lb. per 1 sq. in. of tape (conditions and variables in applications can produce different stresses and affect holding power)

TWIN STICK®

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470096 | 1/32 | 1/4 | 1/4 | 15,000 |
| 470031 | 1/32 | 1/4 | 1/2 | 15,000 |
| 470097 | 1/32 | 1/4 | 1 | 10,000 |
| 472725 | 1/32 | 1/4 | 2 | 7,500 |
| 472726 | 1/32 | 1/4 | 3 | 5,000 |
| 500100 | 1/32 | 5/16 | 1-1/2 | 25,000 |
| 470027 | 1/32 | 1/2 | 1/2 | 10,000 |
| 470098 | 1/32 | 1/2 | 3/4 | 10,000 |
| 470000 | 1/32 | 1/2 | 1 | 10,000 |
| 472730 | 1/32 | 1/2 | 1-1/2 | 10,000 |
| 470001 | 1/32 | 1/2 | 2 | 10,000 |
| 472731 | 1/32 | 1/2 | 2-1/2 | 7,500 |
| 470002 | 1/32 | 1/2 | 3 | 5,000 |
| 472732 | 1/32 | 1/2 | 3-1/2 | 5,000 |
| 470003 | 1/32 | 1/2 | 4 | 5,000 |

(more 1/32" sizes continued on next page)

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



Pre-cut
pieces for
quick
application

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

TWIN STICK® MOST POPULAR

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470008 | 1/32 | 1 | 3 | 4,000 |
| 470029 | 1/32 | 1 | 4 | 2,500 |
| 470145 | 1/32 | 1 | 6 | 2,000 |
| 470017 | 1/16 | 1 | 2 | 5,000 |
| 470041 | 1/16 | 1 | 3 | 5,000 |
| 470019 | 1/16 | 1 | 4 | 2,500 |



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 472733 | 1/32 | 1/2 | 4-1/2 | 4,000 |
| 470099 | 1/32 | 1/2 | 5 | 3,000 |
| 470100 | 1/32 | 1/2 | 6 | 3,000 |
| 470101 | 1/32 | 1/2 | 7 | 2,000 |
| 470102 | 1/32 | 1/2 | 8 | 2,000 |
| 470103 | 1/32 | 1/2 | 9 | 2,000 |
| 470104 | 1/32 | 1/2 | 10 | 2,000 |
| 470105 | 1/32 | 1/2 | 11 | 2,000 |
| 470106 | 1/32 | 1/2 | 12 | 2,000 |
| 470120 | 1/32 | 3/4 | 3/4 | 10,000 |
| 470121 | 1/32 | 3/4 | 1 | 10,000 |
| 472744 | 1/32 | 3/4 | 1-1/2 | 7,500 |
| 470004 | 1/32 | 3/4 | 2 | 5,000 |
| 472745 | 1/32 | 3/4 | 2-1/2 | 5,000 |
| 470005 | 1/32 | 3/4 | 3 | 5,000 |
| 472746 | 1/32 | 3/4 | 3-1/2 | 3,500 |
| 470122 | 1/32 | 3/4 | 4 | 2,500 |
| 470123 | 1/32 | 3/4 | 5 | 2,000 |
| 470124 | 1/32 | 3/4 | 6 | 2,000 |
| 470125 | 1/32 | 3/4 | 7 | 2,000 |
| 470126 | 1/32 | 3/4 | 8 | 2,000 |
| 470127 | 1/32 | 3/4 | 9 | 2,000 |
| 478767 | 1/32 | 3/4 | 10 | 2,000 |

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS



SEMI
PERMANENT
DISPLAYS



CUSTOM CONVERTING

Projects come in every shape and size — your tape solution should, too.


Low minimum,
fast turnaround.



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

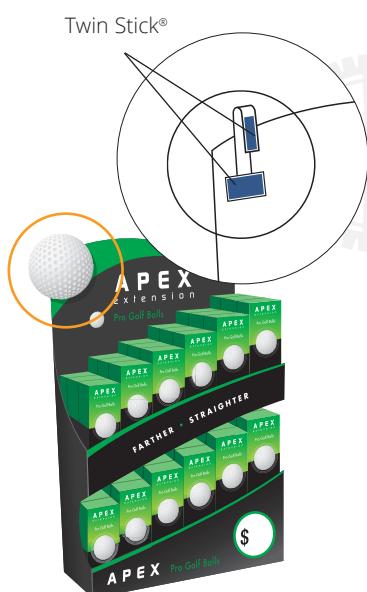

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|--------------|----------|-----------|-------------|
| 478768 | 1/32 | 3/4 | 12 | 2,500 |
| 478769 | 1/32 | 3/4 | 15 | 2,000 |
| 478770 | 1/32 | 3/4 | 17 | 2,500 |
| 470006 | 1/32 | 1 | 1 | 10,000 |
| 470040 | 1/32 | 1 | 1 | 20,000 |
| 472758 | 1/32 | 1 | 1-1/2 | 7,500 |
| 470007 | 1/32 | 1 | 2 | 6,300 |
| 472759 | 1/32 | 1 | 2-1/2 | 5,000 |
| 470008 | 1/32 | 1 | 3 | 4,000 |
| 472760 | 1/32 | 1 | 3-1/2 | 3,000 |
| 470029 | 1/32 | 1 | 4 | 2,500 |
| 472761 | 1/32 | 1 | 4-1/2 | 2,000 |
| 470144 | 1/32 | 1 | 5 | 2,000 |
| 470145 | 1/32 | 1 | 6 | 2,000 |
| 478762 | 1/32 | 1 | 7 | 2,500 |
| 478763 | 1/32 | 1 | 8 | 2,500 |
| 478764 | 1/32 | 1 | 9 | 2,500 |
| 478750 | 1/32 | 1 | 10 | 2,500 |
| 478751 | 1/32 | 1 | 11 | 2,500 |
| 478752 | 1/32 | 1 | 12 | 2,500 |
| 478753 | 1/32 | 1 | 13 | 2,500 |
| 478754 | 1/32 | 1 | 14 | 2,500 |
| 478755 | 1/32 | 1 | 15 | 2,500 |
| 478756 | 1/32 | 1 | 16 | 2,500 |
| 478757 | 1/32 | 1 | 17 | 2,500 |
| 478758 | 1/32 | 1 | 18 | 2,500 |
| 478760 | 1/32 | 1 | 20 | 2,000 |
| 478761 | 1/32 | 1 | 24 | 2,500 |
| 472776 | 1/32 | 1-1/2 | 1-1/2 | 5,000 |
| 470165 | 1/32 | 2 | 2 | 2,000 |
| 474789 | 1/32 | 2 | 3 | 1,500 |
| 475369 | 1/32 | 2 | 4 | 1,500 |
| 472777 | 1/32 | 3 | 3 | 1,500 |
| 470028 | 1/16 | 1/2 | 1/2 | 10,000 |
| 470009 | 1/16 | 1/2 | 1 | 10,000 |
| 470010 | 1/16 | 1/2 | 2 | 10,000 |
| 472779 | 1/16 | 1/2 | 2-1/2 | 7,500 |
| 470011 | 1/16 | 1/2 | 3 | 5,000 |
| 470012 | 1/16 | 1/2 | 4 | 5,000 |

(more 1/16" sizes continued on next page)

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DURACO.

Securely attach
wobblers to displays
(see other uses on page 10)

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470249 | 1/16 | 1/2 | 5 | 3,000 |
| 470013 | 1/16 | 1/2 | 6 | 3,000 |
| 478742 | 1/16 | 1/2 | 13 | 3,000 |
| 470269 | 1/16 | 3/4 | 3/4 | 10,000 |
| 470270 | 1/16 | 3/4 | 1 | 10,000 |
| 472792 | 1/16 | 3/4 | 1-1/2 | 7,500 |
| 470014 | 1/16 | 3/4 | 2 | 5,000 |
| 500739 | 1/16 | 3/4 | 2-3/4 | 5,000 |
| 470015 | 1/16 | 3/4 | 3 | 2,500 |
| 470271 | 1/16 | 3/4 | 4 | 2,500 |
| 470273 | 1/16 | 3/4 | 6 | 2,000 |
| 470016 | 1/16 | 1 | 1 | 10,000 |
| 470038 | 1/16 | 1 | 1 | 20,000 |
| 472806 | 1/16 | 1 | 1-1/2 | 7,500 |
| 470017 | 1/16 | 1 | 2 | 5,000 |
| 472807 | 1/16 | 1 | 2-1/2 | 5,000 |
| 470018 | 1/16 | 1 | 3 | 2,500 |
| 470041 | 1/16 | 1 | 3 | 5,000 |
| 472808 | 1/16 | 1 | 3-1/2 | 2,500 |
| 470019 | 1/16 | 1 | 4 | 2,500 |
| 470293 | 1/16 | 1 | 5 | 2,000 |
| 470294 | 1/16 | 1 | 6 | 2,000 |
| 478739 | 1/16 | 1 | 7 | 2,000 |
| 478740 | 1/16 | 1 | 8 | 2,000 |
| 478741 | 1/16 | 1 | 9 | 2,500 |
| 478728 | 1/16 | 1 | 10 | 2,000 |
| 478729 | 1/16 | 1 | 11 | 2,000 |
| 478730 | 1/16 | 1 | 12 | 2,000 |
| 478731 | 1/16 | 1 | 13 | 2,500 |
| 478732 | 1/16 | 1 | 14 | 2,500 |
| 478733 | 1/16 | 1 | 15 | 2,500 |
| 478734 | 1/16 | 1 | 16 | 2,500 |
| 478735 | 1/16 | 1 | 17 | 2,500 |
| 478736 | 1/16 | 1 | 18 | 2,500 |

(more 1/16" sizes continued on next page)

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS



SEMI
PERMANENT
DISPLAYS



Securely
attach dispensers
to surfaces
without drilling
or mechanical
fasteners



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Pre-cut
pieces for
quick
application



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 478738 | 1/16 | 1 | 20 | 2,000 |
| 470314 | 1/16 | 2 | 2 | 2,000 |
| 475339 | 1/16 | 2 | 3 | 1,500 |
| 475290 | 1/16 | 2 | 4 | 1,500 |
| 472828 | 1/16 | 3 | 3 | 1,000 |
| 474708 | 1/16 | 4 | 4 | 600 |
| 470395 | 1/8 | 1/2 | 1/2 | 10,000 |
| 470397 | 1/8 | 1/2 | 1 | 10,000 |
| 470398 | 1/8 | 1/2 | 2 | 7,500 |
| 470399 | 1/8 | 1/2 | 3 | 5,000 |
| 470400 | 1/8 | 1/2 | 4 | 5,000 |
| 470020 | 1/8 | 3/4 | 2 | 5,000 |
| 470410 | 1/8 | 3/4 | 4 | 1,500 |
| 470412 | 1/8 | 3/4 | 6 | 1,500 |
| 470022 | 1/8 | 1 | 1 | 6,500 |
| 470042 | 1/8 | 1 | 1 | 12,000 |
| 472838 | 1/8 | 1 | 1-1/2 | 5,000 |
| 470023 | 1/8 | 1 | 2 | 2,700 |
| 472839 | 1/8 | 1 | 2-1/2 | 2,000 |
| 470024 | 1/8 | 1 | 3 | 2,000 |
| 470039 | 1/8 | 1 | 3 | 3,000 |
| 470025 | 1/8 | 1 | 4 | 2,000 |
| 478776 | 1/8 | 1 | 5 | 1,500 |
| 478777 | 1/8 | 1 | 6 | 1,500 |
| 478778 | 1/8 | 1 | 7 | 1,500 |
| 478773 | 1/8 | 1 | 12 | 1,500 |
| 472855 | 1/8 | 3 | 3 | 750 |
| 475365 | 1/8 | 4 | 4 | 400 |

(more stock sizes continued on next page)

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



TWIN STICK®


SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470473 | 3/16 | 3/4 | 3 | 2,000 |
| 470034 | 3/16 | 1 | 1 | 5,000 |
| 470476 | 3/16 | 1 | 2 | 2,000 |
| 470477 | 3/16 | 1 | 3 | 1,500 |
| 472857 | 1/4 | 1/2 | 1/2 | 8,000 |
| 470487 | 1/4 | 1/2 | 1 | 7,500 |
| 470488 | 1/4 | 1/2 | 2 | 3,000 |
| 470026 | 1/4 | 1 | 1 | 5,000 |
| 472858 | 1/4 | 1 | 1-1/2 | 3,000 |
| 470502 | 1/4 | 1 | 2 | 2,300 |
| 470033 | 1/4 | 1 | 3 | 1,000 |
| 470503 | 1/4 | 1 | 4 | 1,000 |
| 470504 | 1/4 | 1 | 5 | 1,000 |
| 470505 | 1/4 | 1 | 6 | 750 |





Use long pre-cut strips to assemble displays

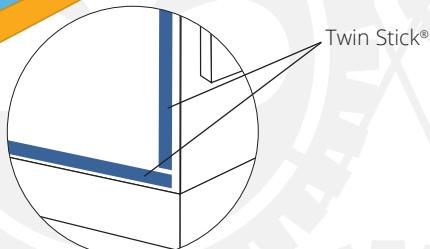

Foam tapes allow for greater surface contact on irregular surfaces. Firm, even pressure improves the bond.

ADHESIVE CONTACT



TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Diameters on a Roll, White

| Part Number | Thickness in | Diameter in | Pieces/Roll |
|-------------|--------------|-------------|-------------|
| 475829 | 1/32 | 3/8 | 10,000 |
| 472715 | 1/32 | 1/2 | 5,000 |
| 472718 | 1/32 | 3/4 | 4,000 |
| 472721 | 1/32 | 1 | 3,000 |
| 472724 | 1/32 | 1-1/4 | 2,000 |
| 502335 | 1/32 | 1-1/2 | 2,000 |
| 502436 | 1/16 | 3/8 | 10,000 |
| 472716 | 1/16 | 1/2 | 5,000 |
| 472719 | 1/16 | 3/4 | 4,000 |
| 472722 | 1/16 | 1 | 3,000 |
| 472717 | 1/8 | 1/2 | 3,000 |



Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 470166 | 1/32 | 1/2 | 1/2 | 10 | 7,500 |
| 470168 | 1/32 | 1/2 | 1 | 10 | 7,500 |
| 470169 | 1/32 | 1/2 | 2 | 10 | 4,000 |
| 470170 | 1/32 | 1/2 | 3 | 10 | 2,500 |
| 470173 | 1/32 | 1/2 | 6 | 10 | 1,500 |
| 500400 | 1/32 | 3/4 | 3 | 1 | 10,000 |
| 470203 | 1/32 | 3/4 | 10 | 2 | 500 |
| 475024 | 1/32 | 1 | 1 | 1 | 5,000 |
| 470219 | 1/32 | 1 | 1 | 10 | 4,000 |
| 470220 | 1/32 | 1 | 2 | 10 | 2,000 |
| 475107 | 1/32 | 1 | 3 | 1 | 3,000 |
| 470221 | 1/32 | 1 | 3 | 10 | 1,250 |
| 475165 | 1/32 | 1 | 4 | 2 | 2,500 |
| 470222 | 1/32 | 1 | 4 | 10 | 1,000 |
| 470223 | 1/32 | 1 | 5 | 5 | 750 |
| 470224 | 1/32 | 1 | 6 | 5 | 600 |
| 470239 | 1/32 | 1 | 21 | 2 | 170 |
| 470244 | 1/32 | 2 | 2 | 4 | 900 |

(more stock sizes continued on next page)



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DURACO.

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 501060 | 1/16 | 1/2 | 2-1/2 | 2 | 25,000 |
| 501630 | 1/16 | 3/4 | 3/4 | 4 | 10,000 |
| 501138 | 1/16 | 1 | 1 | 2 | 20,000 |
| 470368 | 1/16 | 1 | 1 | 10 | 4,000 |
| 470369 | 1/16 | 1 | 2 | 10 | 2,000 |
| 470370 | 1/16 | 1 | 3 | 10 | 1,250 |
| 470371 | 1/16 | 1 | 4 | 10 | 1,000 |
| 470377 | 1/16 | 1 | 10 | 2 | 400 |
| 470390 | 1/16 | 1 | 23 | 2 | 170 |
| 475836 | 1/16 | 8-1/2 | 11 | 1 | 200 |
| 470427 | 1/8 | 1/2 | 1 | 10 | 6,000 |
| 470450 | 1/8 | 1 | 1 | 10 | 3,000 |
| 470451 | 1/8 | 1 | 2 | 10 | 1,500 |
| 470452 | 1/8 | 1 | 3 | 10 | 1,000 |
| 470453 | 1/8 | 1 | 4 | 10 | 750 |
| 470455 | 1/8 | 1 | 6 | 5 | 500 |
| 473465 | 3/16 | 1/2 | 1-1/2 | 10 | 8,400 |
| 474191 | 1/4 | 3/4 | 2-3/4 | 1 | 6,000 |
| 470510 | 1/4 | 1 | 1 | 10 | 2,200 |
| 470511 | 1/4 | 1 | 3 | 10 | 780 |

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS



SEMI
PERMANENT
DISPLAYS




TIP

Pads are great for kits, or when your job calls for smaller quantities.

Know your foam tape thickness

- For most POP display applications, use 1/32".
- For corrugated or textured surfaces, use 1/16".
- For filling gaps, use 1/8" or greater.
- For 3-D effect, use 3/8" or greater.

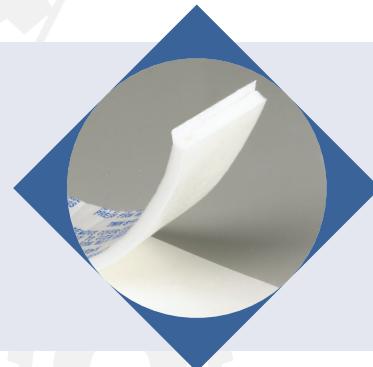

DURACO.
SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|--------------|----------|-----------|-------------|
| 470553 | 1/32 | 1/2 | 1 | 10,000 |
| 470554 | 1/32 | 1/2 | 2 | 10,000 |
| 470555 | 1/32 | 1/2 | 3 | 5,000 |
| 470556 | 1/32 | 1/2 | 4 | 5,000 |
| 470569 | 1/32 | 3/4 | 2 | 5,000 |
| 470570 | 1/32 | 3/4 | 3 | 5,000 |
| 470573 | 1/32 | 3/4 | 6 | 2,000 |
| 470518 | 1/32 | 1 | 1 | 20,000 |
| 470583 | 1/32 | 1 | 2 | 6,300 |
| 470584 | 1/32 | 1 | 3 | 4,000 |
| 470585 | 1/32 | 1 | 4 | 2,500 |
| 470586 | 1/32 | 1 | 5 | 2,000 |
| 470587 | 1/32 | 1 | 6 | 2,000 |
| 478724 | 1/32 | 1 | 8 | 1,500 |
| 478721 | 1/32 | 1 | 10 | 1,500 |
| 470636 | 1/16 | 1/2 | 8 | 2,000 |
| 470639 | 1/16 | 3/4 | 1 | 10,000 |
| 470512 | 1/16 | 1 | 1 | 10,000 |
| 470644 | 1/16 | 1 | 2 | 5,000 |
| 470513 | 1/16 | 1 | 3 | 2,500 |
| 470645 | 1/16 | 1 | 4 | 2,500 |
| 470647 | 1/16 | 1 | 6 | 2,000 |
| 478720 | 1/16 | 1 | 8 | 1,500 |
| 470686 | 1/8 | 1/2 | 1 | 10,000 |
| 475498 | 1/8 | 3/4 | 1-1/2 | 5,000 |
| 470704 | 1/8 | 3/4 | 9 | 1,500 |
| 470706 | 1/8 | 1 | 1 | 6,500 |
| 470514 | 1/8 | 1 | 2 | 2,700 |
| 470708 | 1/8 | 1 | 3 | 2,000 |
| 470709 | 1/8 | 1 | 4 | 2,000 |
| 478725 | 1/8 | 1 | 6 | 1,500 |
| 478726 | 1/8 | 1 | 7 | 1,500 |
| 478727 | 1/8 | 1 | 8 | 1,500 |
| 470715 | 1/8 | 1 | 10 | 1,000 |
| 474306 | 1/8 | 2 | 2 | 2,000 |
| 502320 | 1/4 | 1 | 1 | 5,000 |
| 502321 | 1/4 | 1 | 2 | 2,300 |
| 502323 | 1/4 | 1 | 3 | 1,000 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



**TRY BEFORE
YOU BUY!**

Call or go online
to order free samples.

TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470619 | 1/32 | 1 | 1 | 10 | 4,000 |
| 470676 | 1/16 | 1 | 3 | 10 | 1,250 |

TEMPORARY
DISPLAYS



PERMANENT
DISPLAYS



SEMI
PERMANENT
DISPLAYS

Diameters on a Roll, Black

| Part Number | Thickness in | Diameter in | Pieces/Roll |
|-------------|-----------------|----------------|-------------|
| 502432 | 1/32 | 1/2 | 5,000 |
| 502440 | 1/32 | 3/4 | 4,000 |

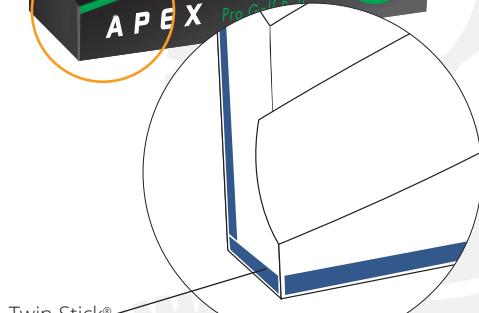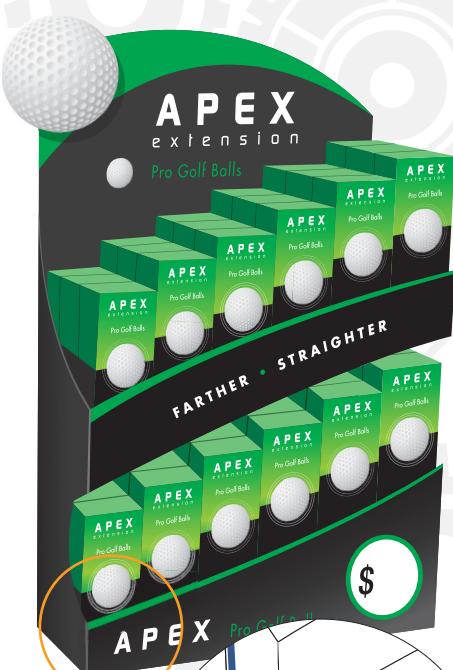

TIP

Pack extra pads with your product or display for emergency repairs.

Use black Twin Stick® to create invisible bonds when assembling black or dark displays

DURACO.
SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

THICK TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



THICK TWIN STICK®

Foam blocks with permanent adhesive can be used to create a 3-D effect or fill gaps

Specifications

- Adhesive: Rubber-based permanent on both sides (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|--------------|----------|-----------|-------------|
| 472859 | 3/8 | 1 | 1 | 4,000 |
| 472860 | 3/8 | 1 | 2 | 2,000 |
| 472861 | 3/8 | 1 | 3 | 1,100 |
| 472865 | 1/2 | 1/2 | 1 | 5,000 |
| 470030 | 1/2 | 1 | 1 | 3,000 |
| 470044 | 1/2 | 1 | 2 | 1,800 |
| 470032 | 1/2 | 1 | 3 | 1,200 |
| 470047 | 1/2 | 2 | 2 | 900 |
| 470049 | 1/2 | 3 | 3 | 300 |

Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|--------------|----------|-----------|-------------|
| 470515 | 1/2 | 1 | 1 | 3,000 |
| 470521 | 1/2 | 1 | 2 | 1,800 |
| 470523 | 1/2 | 1 | 3 | 1,200 |



Place blocks behind artwork to create 3-D effects!

WHERE TO USE THICK TWIN STICK®

- Corrugate
- Chipboard
- Wood
- Low surface energy plastics
- Powder-coated materials
- UV coatings

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS





THICK TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470043 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470045 | 1/2 | 1 | 2 | 10 | 1,000 |
| 470048 | 1/2 | 2 | 2 | 4 | 600 |
| 472866 | 3/4 | 3/4 | 1 | 24 | 2,400 |
| 470037 | 3/4 | 1 | 1 | 36 | 4,320 |
| 470051 | 3/4 | 1 | 2 | 18 | 3,600 |
| 470052 | 3/4 | 1 | 3 | 12 | 1,800 |
| 470053 | 3/4 | 2 | 2 | 9 | 1,800 |
| 470035 | 1 | 1 | 1 | 36 | 2,520 |
| 470036 | 1 | 1 | 1 | 36 | 6,012 |
| 470055 | 1 | 1 | 2 | 18 | 2,898 |
| 470056 | 1 | 1 | 3 | 12 | 1,440 |
| 470060 | 1 | 2 | 2 | 9 | 1,440 |
| 470061 | 1 | 3 | 3 | 4 | 600 |
| 470062 | 1-1/4 | 1 | 1 | 36 | 4,608 |
| 470065 | 1-1/2 | 1 | 1 | 36 | 3,420 |
| 470068 | 1-1/2 | 1-1/2 | 1-1/2 | 12 | 1,440 |
| 470070 | 2 | 1-1/2 | 1-1/2 | 12 | 1,200 |
| 470071 | 2 | 2 | 2 | 1 | 840 |

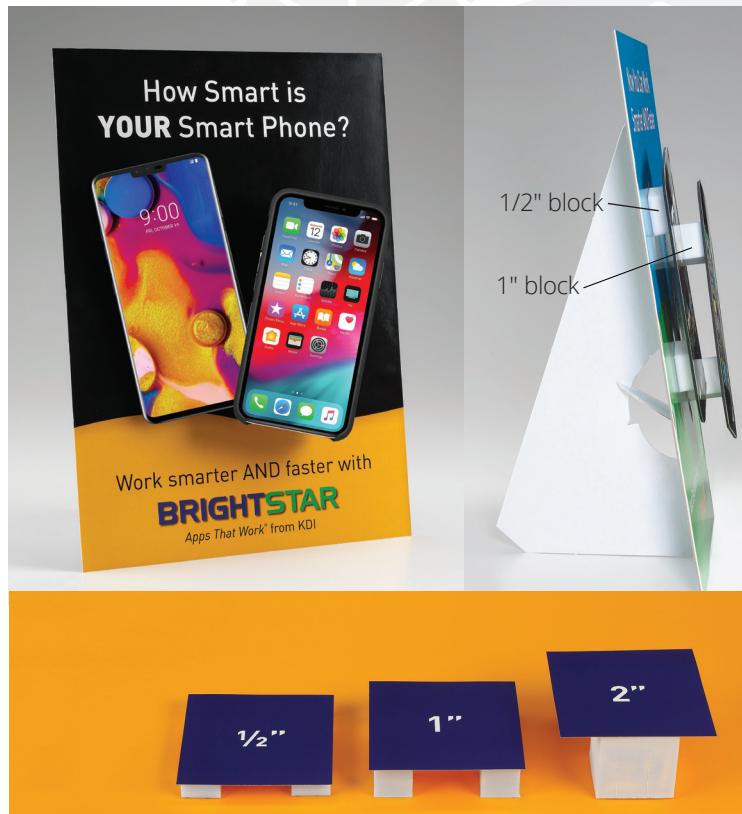

DURACO.
SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

THICK TWIN STICK®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



TIPS

- Use black Thick Twin Stick® on dark backgrounds.
- Place foam blocks 1"- 2" from the edge of dimensional graphics to create a clean 3-D effect.

Pre-cut Pieces in a Pad, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 470520 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470529 | 3/4 | 1 | 1 | 36 | 4,320 |
| 470530 | 3/4 | 1 | 2 | 18 | 3,600 |
| 470519 | 1 | 1 | 1 | 36 | 2,520 |
| 470516 | 1 | 1 | 1 | 36 | 6,012 |
| 470534 | 1 | 1 | 2 | 18 | 2,898 |
| 470535 | 1 | 1 | 3 | 12 | 1,440 |
| 470550 | 2 | 2 | 2 | 1 | 840 |

See our
**REMOVABLE
FOAM BLOCKS**

Pages 40 and 45



CAN'T FIND
YOUR SIZE?

Contact our
tape experts!

866 800 0775



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

 DURACO.

THICK TWIN STICK® LSE

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



TWIN STICK® LSE

Versatile double-sided foam tape ideal for low surface energy substrates.

Specifications

- Adhesive: Rubber-based permanent on both sides
 - Application Temperature: 65°F to 100°F
 - Service Temperature: -20°F to 150°F

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 479489 | 1/32 | 1/2 | 1 | 10,000 |
| 479490 | 1/32 | 1/2 | 2 | 10,000 |
| 479491 | 1/32 | 1/2 | 3 | 5,000 |
| 479492 | 1/32 | 1/2 | 4 | 5,000 |
| 479493 | 1/32 | 1 | 1 | 10,000 |
| 479494 | 1/32 | 1 | 2 | 6,300 |
| 479495 | 1/32 | 1 | 3 | 4,000 |
| 479496 | 1/32 | 1 | 4 | 2,500 |
| 479497 | 1/16 | 1/2 | 1 | 10,000 |
| 479498 | 1/16 | 1/2 | 2 | 10,000 |
| 479499 | 1/16 | 1/2 | 3 | 5,000 |
| 479500 | 1/16 | 1/2 | 4 | 5,000 |
| 479501 | 1/16 | 1 | 1 | 10,000 |
| 479502 | 1/16 | 1 | 2 | 5,000 |
| 479503 | 1/16 | 1 | 3 | 2,500 |
| 479504 | 1/16 | 1 | 4 | 2,500 |
| 479505 | 1/8 | 1 | 1 | 500 |
| 479506 | 1/8 | 1 | 2 | 2,700 |
| 479507 | 1/8 | 1 | 3 | 2,000 |
| 479508 | 1/8 | 1 | 4 | 2,000 |

WHERE TO USE TWIN STICK® LSE

- Temporary displays
 - Packaging and bindery
 - Signage
 - Corrugated folder/box
 - Plastic fasteners



DUBL KOTE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



WHERE TO USE DUBL KOTE®

- Temporary, semi-permanent and permanent displays
- Plastic extrusions
- Wire management raceways
- Signage
- End caps
- Headers
- Textured surface bonding
- Plastic fasteners
- Decorative trim
- Shower enclosures
- Mirror mounting
- Shower splash guard
- Metal to metal bonding
- Wall files
- Air fresheners
- Protective trim

DUBL KOTE®

Versatile double-sided foam tape ideal for hand or automatic application

Specifications

- Adhesive: Rubber-based permanent on both sides (Not recommended for direct UV exposure. See application notes for more information.)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Holding Power: 1 lb. per 1 sq. in. of tape (variables in applications can produce different stresses and affect holding power)

Short Rolls, White

1.5" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 502613 | 1/32 | 1/2 | 54 | 180 |
| 501737 | 1/32 | 1/2 | 108 | 80 |
| 471366 | 1/32 | 3/4 | 30 | 45 |
| 471367 | 1/32 | 1 | 30 | 36 |
| 471368 | 1/16 | 1/2 | 30 | 40 |
| 500931 | 1/16 | 3/4 | 108 | 13 |
| 471370 | 1/16 | 1 | 30 | 20 |
| 500930 | 1/16 | 1 | 108 | 10 |

TIPS

- Use a roller when hand applying Dubl Kote® to ensure a smooth, even application.
- Firm, even pressure across the entire surface is essential for the adhesive to bond.
- Short rolls are useful to include in kits for on-site assembly or field repairs.

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



DUBL KOTE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Standard Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471355 | 1/32 | 1/4 | 216 | 48 |
| 472230 | 1/32 | 1/4 | 216 | 12 |
| 471346 | 1/32 | 3/8 | 216 | 32 |
| 472231 | 1/32 | 3/8 | 216 | 12 |
| 471339 | 1/32 | 1/2 | 216 | 24 |
| 472232 | 1/32 | 1/2 | 216 | 12 |
| 500595 | 1/32 | 21/32 | 216 | 19 |
| 501699 | 1/32 | 11/16 | 216 | 18 |
| 471340 | 1/32 | 3/4 | 216 | 16 |
| 471341 | 1/32 | 1 | 216 | 12 |
| 473607 | 1/32 | 1-1/4 | 216 | 10 |
| 471374 | 1/32 | 1-1/2 | 216 | 8 |
| 471375 | 1/32 | 2 | 216 | 6 |
| 471376 | 1/32 | 3 | 216 | 4 |
| 473617 | 1/32 | 3-1/2 | 216 | 5 |
| 472867 | 1/32 | 4 | 216 | 3 |
| 473626 | 1/32 | 13-1/2 | 216 | 1 |
| 502626 | 1/32 | 23 | 216 | 1 |
| 473608 | 1/32 | 24 | 216 | 1 |
| 501918 | 1/32 | 28 | 216 | 1 |
| 471377 | 1/16 | 1/4 | 216 | 48 |
| 472229 | 1/16 | 1/4 | 216 | 12 |
| 473594 | 1/16 | 3/8 | 216 | 32 |
| 471342 | 1/16 | 1/2 | 216 | 24 |
| 472233 | 1/16 | 1/2 | 216 | 12 |
| 471343 | 1/16 | 3/4 | 216 | 16 |
| 471344 | 1/16 | 1 | 216 | 12 |
| 471356 | 1/16 | 1-1/2 | 216 | 8 |
| 475542 | 1/16 | 1-5/8 | 216 | 7 |
| 471378 | 1/16 | 2 | 216 | 6 |
| 473649 | 1/16 | 2-1/8 | 216 | 7 |
| 471379 | 1/16 | 3 | 216 | 4 |
| 473625 | 1/16 | 24 | 216 | 1 |
| 471357 | 1/8 | 1/2 | 108 | 24 |
| 472234 | 1/8 | 1/2 | 108 | 12 |
| 472870 | 1/8 | 5/8 | 108 | 19 |
| 471345 | 1/8 | 3/4 | 108 | 16 |
| 471353 | 1/8 | 1 | 108 | 12 |
| 471380 | 1/8 | 2 | 108 | 6 |
| 471382 | 3/16 | 1/2 | 75 | 20 |
| 471384 | 3/16 | 1 | 75 | 10 |
| 471385 | 1/4 | 1/2 | 50 | 20 |
| 471386 | 1/4 | 3/4 | 50 | 13 |
| 471387 | 1/4 | 1 | 50 | 10 |

TEMPORARY
DISPLAYS

SEMI
PERMANENT
DISPLAYS



SEMI
PERMANENT
DISPLAYS

Use
Dubl Kote®
for the installation
of boards, mirrors
and other
fixtures



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DUBL KOTE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS




Longest rolls in the industry with 1/8" and 1/4" thickness

Long Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 473650 | 1/32 | 1/4 | 432 | 24 |
| 471350 | 1/32 | 3/8 | 900 | 20 |
| 502375 | 1/32 | 15/32 | 1,050 | 16 |
| 471363 | 1/32 | 1/2 | 1,050 | 16 |
| 471358 | 1/32 | 1/2 | 1,500 | 9 |
| 472880 | 1/32 | 5/8 | 1,050 | 13 |
| 502504 | 1/32 | 23/32 | 1,050 | 11 |
| 476057 | 1/32 | 3/4 | 1,050 | 11 |
| 471360 | 1/32 | 3/4 | 1,500 | 7 |
| 476058 | 1/32 | 1 | 1,050 | 8 |
| 471359 | 1/32 | 1 | 1,500 | 5 |
| 473635 | 1/32 | 1-1/4 | 900 | 6 |
| 501334 | 1/32 | 1-3/4 | 900 | 4 |
| 473648 | 1/32 | 2 | 900 | 3 |
| 473632 | 1/16 | 3/8 | 450 | 32 |
| 471347 | 1/16 | 1/2 | 450 | 24 |
| 471362 | 1/16 | 1/2 | 750 | 10 |
| 471348 | 1/16 | 3/4 | 450 | 16 |
| 471349 | 1/16 | 1 | 450 | 12 |
| 471361 | 1/16 | 1 | 750 | 5 |
| 472877 | 1/8 | 1/2 | 300 | 11 |
| 472879 | 1/8 | 1 | 300 | 5 |
| 472881 | 1/4 | 1 | 100 | 7 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

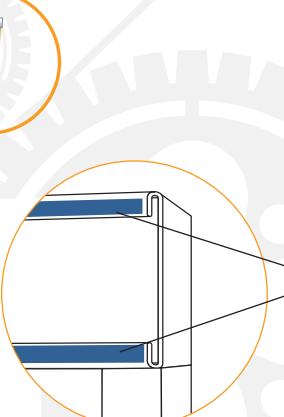

Use long length rolls for in-line taping on extrusions and on strip & spot applications

Dubl Kote® is applied in-line to extrusions used to attach the header framework in this display

DUBL KOTE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Short Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 501260 | 1/32 | 48 | 108 | 1 |

3" diameter core

TEMPORARY
DISPLAYS

SEMI
PERMANENT
DISPLAYS

Standard Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471400 | 1/32 | 1/4 | 216 | 48 |
| 472221 | 1/32 | 1/4 | 216 | 12 |
| 471397 | 1/32 | 3/8 | 216 | 32 |
| 472225 | 1/32 | 3/8 | 216 | 12 |
| 471394 | 1/32 | 1/2 | 216 | 24 |
| 472223 | 1/32 | 1/2 | 216 | 12 |
| 471395 | 1/32 | 3/4 | 216 | 16 |
| 471399 | 1/32 | 1 | 216 | 12 |
| 473674 | 1/32 | 1-1/4 | 216 | 10 |
| 471401 | 1/32 | 1-1/2 | 216 | 8 |
| 471402 | 1/32 | 2 | 216 | 6 |
| 473681 | 1/32 | 2-1/2 | 216 | 5 |
| 471403 | 1/32 | 3 | 216 | 4 |
| 472874 | 1/32 | 12 | 216 | 1 |
| 473685 | 1/32 | 13-1/2 | 216 | 1 |
| 471406 | 1/16 | 1/4 | 216 | 48 |
| 472222 | 1/16 | 1/4 | 216 | 12 |
| 473671 | 1/16 | 3/8 | 216 | 32 |
| 471396 | 1/16 | 1/2 | 216 | 24 |
| 472224 | 1/16 | 1/2 | 216 | 12 |
| 417407 | 1/16 | 3/4 | 216 | 16 |
| 471408 | 1/16 | 1 | 216 | 12 |
| 471409 | 1/16 | 1-1/2 | 216 | 8 |
| 471410 | 1/16 | 2 | 216 | 6 |
| 471415 | 1/8 | 1/2 | 108 | 24 |
| 471416 | 1/8 | 3/4 | 108 | 16 |
| 471417 | 1/8 | 1 | 108 | 12 |

3" diameter core

SEMI
PERMANENT
DISPLAYS



Long Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 473677 | 1/32 | 3/8 | 900 | 20 |
| 471398 | 1/32 | 1/2 | 900 | 16 |
| 500661 | 1/32 | 5/8 | 450 | 16 |
| 471404 | 1/32 | 3/4 | 1,050 | 11 |
| 471405 | 1/32 | 1 | 1,050 | 8 |
| 471412 | 1/16 | 1/2 | 450 | 24 |
| 471413 | 1/16 | 3/4 | 450 | 16 |

3" diameter core



CAN'T FIND
YOUR SIZE?

Contact our
tape experts!



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DUBL KOTE® ACRYLIC

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



DUBL KOTE® ACRYLIC

Use on flexible plastics, as acrylic adhesive offers good plasticizer resistance

Specifications

- Adhesive: Acrylic-based permanent on both sides, identified with our black printed liner
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 175°F

Standard Rolls, White

3" diameter core

| Part Number | Thickness | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| | in | in | ft | |
| 472595 | 1/32 | 1/4 | 216 | 12 |
| 472597 | 1/32 | 3/8 | 216 | 12 |
| 472599 | 1/32 | 1/2 | 216 | 12 |
| 472600 | 1/32 | 1/2 | 216 | 24 |
| 472601 | 1/32 | 3/4 | 216 | 16 |
| 472602 | 1/32 | 1 | 216 | 12 |
| 472608 | 1/16 | 1/2 | 216 | 12 |
| 472610 | 1/16 | 3/4 | 216 | 16 |
| 472611 | 1/16 | 1 | 216 | 12 |
| 472613 | 1/16 | 2 | 216 | 6 |
| 472616 | 1/8 | 1/2 | 108 | 24 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



FREE SAMPLES

866 800 0775

WHERE TO USE DUBL KOTE® ACRYLIC

- Temporary, semi-permanent and permanent displays
- Plastic extrusions
- Wire management raceways
- Signage
- End caps
- Headers
- Textured surface bonding
- Plastic fasteners
- Decorative trim
- Shower enclosures
- Mirror mounting
- Shower splash guard
- Metal to metal bonding
- Wall files
- Air fresheners
- Protective trim

DUBL KOTE® ACRYLIC

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Long Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 472624 | 1/32 | 1/2 | 1,500 | 9 |
| 472632 | 1/16 | 1 | 450 | 12 |

3" diameter core

TEMPORARY DISPLAYS

SEMI PERMANENT DISPLAYS

SEMI PERMANENT DISPLAYS

Standard Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 472634 | 1/32 | 1/2 | 216 | 24 |
| 472635 | 1/32 | 3/4 | 216 | 16 |
| 472636 | 1/32 | 1 | 216 | 12 |
| 472637 | 1/16 | 1/2 | 216 | 24 |
| 472639 | 1/16 | 1 | 216 | 12 |

3" diameter core



FAST SHIPPING



When time is limited,
every second counts.

So, we've extended our
same day shipping hours to better
meet your needs on in-stock products.



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DUBL KOTE® LSE

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



DUBL KOTE® LSE


Ideal for applying to LSE plastics without the added thickness.
Offers the ability to be applied automatically or in long lengths.

Specifications

- Adhesive: Rubber-based permanent on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Standard Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 479509 | 1/32 | 1/2 | 216 | 24 |
| 479510 | 1/32 | 1/2 | 1500 | 9 |
| 479511 | 1/32 | 3/4 | 216 | 16 |
| 479512 | 1/32 | 1 | 216 | 12 |
| 479513 | 1/32 | 1 | 1500 | 5 |
| 479514 | 1/16 | 1/2 | 216 | 24 |
| 479515 | 1/16 | 3/4 | 216 | 16 |
| 479516 | 1/16 | 1 | 216 | 12 |

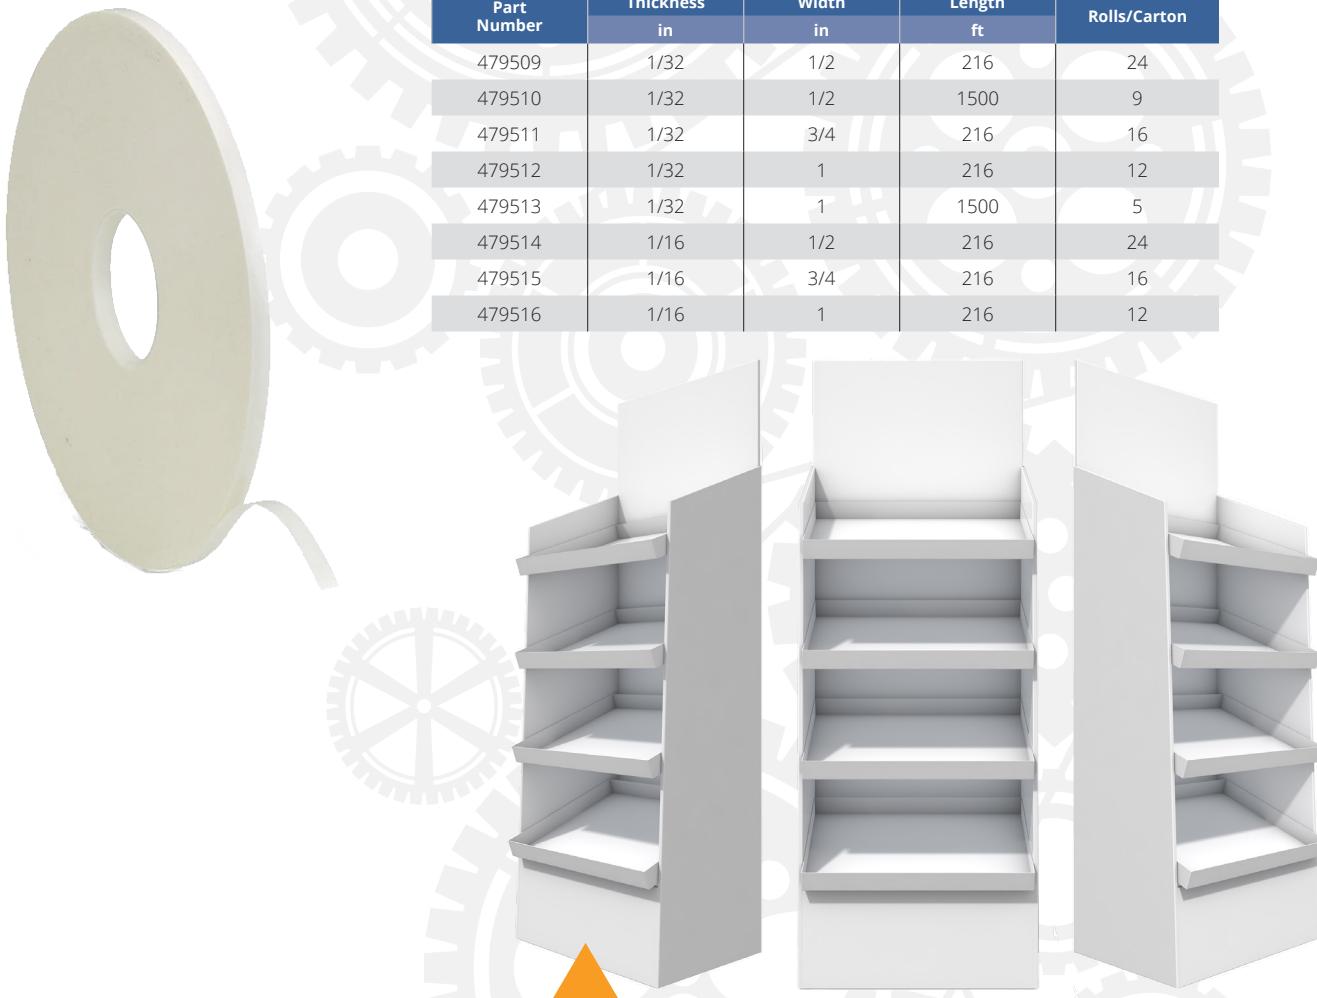

**USE DUBL KOTE® LSE ON
POINT-OF-PURCHASE DISPLAYS
TO RELIABLY ADHERE YOUR
GRAPHICS**

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



DK FILM®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

DK FILM®

Provides the tack of our permanent rubber-based adhesive without the thickness of foam tape

Specifications

- Adhesive: Rubber-based permanent on both sides (not recommended for direct UV exposure. See application notes for more information)
- Thickness: 0.5 mil film, 1.25 mil to 2 mil adhesive on each side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 190°F

Features

- Rubber-based adhesives have good initial tack/quick-stick and are designed to bond to many different types of surfaces
- Pre-cut pieces available for faster assembly of POP displays and signage
- Rolls up to 3,000 feet in length designed to improve efficiencies in automatic applications

TEMPORARY DISPLAYS

PRINT FINISHING BINDERY

SEMI PERMANENT DISPLAYS



Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Width in | Length ft | Roll Diameter in | Rolls/Carton |
|-------------|--------------------|-----|-------------|--------------|---------------------|--------------|
| | mil | in | | | | |
| 473013 | 3.0 | 1/2 | | 180 | 5-3/4 | 48 |
| 473014 | 3.0 | 3/4 | | 180 | 5-3/4 | 32 |
| 473015 | 3.0 | 1 | | 180 | 5-3/4 | 24 |
| 473016 | 3.0 | 2 | | 180 | 5-3/4 | 12 |
| 472885 | 4.5 | 1/4 | | 180 | 6-5/8 | 64 |
| 471707 | 4.5 | 3/8 | | 180 | 6-5/8 | 40 |
| 471710 | 4.5 | 1/2 | | 180 | 6-5/8 | 48 |
| 471712 | 4.5 | 3/4 | | 180 | 6-5/8 | 32 |
| 471713 | 4.5 | 1 | | 180 | 6-5/8 | 24 |
| 471715 | 4.5 | 2 | | 180 | 6-5/8 | 12 |
| 471716 | 4.5 | 3 | | 180 | 6-5/8 | 8 |
| 471717 | 4.5 | 12 | | 180 | 6-5/8 | 4 |

Long Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Width in | Length ft | Roll Diameter in | Rolls/Carton |
|-------------|--------------------|-----|-------------|--------------|---------------------|--------------|
| | mil | in | | | | |
| 473017 | 3.0 | 1/2 | | 1,000 | 10-13/16 | 18 |
| 473021 | 3.0 | 1/2 | | 3,000 | 18-3/16 | 12 |
| 473018 | 3.0 | 3/4 | | 1,000 | 10-13/16 | 12 |
| 473022 | 3.0 | 3/4 | | 3,000 | 18-3/16 | 4 |
| 473019 | 3.0 | 1 | | 1,000 | 10-13/16 | 9 |
| 473023 | 3.0 | 1 | | 3,000 | 18-3/16 | 6 |
| 473020 | 3.0 | 2 | | 1,000 | 10-13/16 | 4 |
| 471708 | 4.5 | 3/8 | | 750 | 12-1/8 | 14 |
| 471709 | 4.5 | 1/2 | | 1,500 | 17 | 12 |
| 471711 | 4.5 | 3/4 | | 1,500 | 17 | 8 |
| 471714 | 4.5 | 1 | | 750 | 12-1/8 | 6 |

(more stock sizes continued on next page)

WHERE TO USE DK FILM®

- Extrusions
- Nameplates
- Packaging and bindery
- Signage
- POP displays
- Corrugated folders/boxes
- Wire raceways
- Plastic fasteners

TIPS

- Use the thinner 3.0 mil adhesive for less demanding, more cost sensitive applications.
- Use the thicker 4.5 mil adhesive for applications that require higher shear strength.

*Roll diameter listed is nominal with a tolerance of +/- 6%.

DK FILM®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

**TEMPORARY
DISPLAYS**

**PRINT
FINISHING
BINDERY**

**SEMI
PERMANENT
DISPLAYS**

Spools

| Part Number | Adhesive + Carrier | Width in | Length ft | Spools/Carton |
|-------------|--------------------|----------|-----------|---------------|
| | mil | | | |
| 475425 | 3.5 | 1/2 | 20,000 | 1 |
| 475426 | 3.5 | 3/4 | 15,000 | 1 |
| 475427 | 3.5 | 1 | 10,000 | 1 |

Laminating Tape, Wide Width Rolls

| Part Number | Adhesive + Carrier | Width in | Length ft | Rolls/Carton |
|-------------|--------------------|----------|-----------|--------------|
| | mil | | | |
| 473154 | 3.0 | 24 | 180 | 2 |
| 471717 | 4.5 | 12 | 180 | 2 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



Pre-Cut Pieces on a Roll


| Part Number | Adhesive + Carrier | Width | Length | Pieces/Roll |
|-------------|--------------------|-------|--------|-------------|
| | mil | | | |
| 471718 | 4.5 | 1/2 | 1 | 10,000 |
| 471719 | 4.5 | 1/2 | 2 | 10,000 |
| 471720 | 4.5 | 1/2 | 3 | 5,000 |
| 471721 | 4.5 | 1/2 | 4 | 5,000 |
| 471722 | 4.5 | 1/2 | 5 | 3,000 |
| 471723 | 4.5 | 1/2 | 6 | 3,000 |
| 471724 | 4.5 | 1/2 | 7 | 2,000 |
| 471725 | 4.5 | 1/2 | 8 | 2,000 |
| 471726 | 4.5 | 1/2 | 9 | 2,000 |
| 471727 | 4.5 | 1/2 | 10 | 2,000 |
| 471728 | 4.5 | 1/2 | 11 | 2,000 |

(more stock sizes continued on next page)



Pre-Cut Pieces on a Roll

| Part Number | Adhesive + Carrier | Width | Length | Pieces/Roll |
|-------------|--------------------|-------|--------|-------------|
| | mil | in | in | |
| 471743 | 4.5 | 3/4 | 1 | 10,000 |
| 471744 | 4.5 | 3/4 | 2 | 5,000 |
| 471745 | 4.5 | 3/4 | 3 | 5,000 |
| 471746 | 4.5 | 3/4 | 4 | 2,500 |
| 471747 | 4.5 | 3/4 | 5 | 2,000 |
| 471748 | 4.5 | 3/4 | 6 | 2,000 |
| 471749 | 4.5 | 3/4 | 7 | 2,000 |
| 471750 | 4.5 | 3/4 | 8 | 2,000 |
| 471751 | 4.5 | 3/4 | 9 | 2,000 |
| 478695 | 4.5 | 3/4 | 10 | 3,500 |
| 478696 | 4.5 | 3/4 | 11 | 4,000 |
| 478697 | 4.5 | 3/4 | 12 | 3,500 |
| 478698 | 4.5 | 3/4 | 13 | 4,000 |
| 478699 | 4.5 | 3/4 | 14 | 4,000 |
| 478700 | 4.5 | 3/4 | 15 | 4,000 |
| 478701 | 4.5 | 3/4 | 16 | 4,000 |
| 471768 | 4.5 | 1 | 1 | 10,000 |
| 471769 | 4.5 | 1 | 2 | 6,300 |
| 471770 | 4.5 | 1 | 3 | 4,000 |
| 471771 | 4.5 | 1 | 4 | 2,500 |
| 471772 | 4.5 | 1 | 5 | 2,000 |
| 471773 | 4.5 | 1 | 6 | 2,000 |
| 478692 | 4.5 | 1 | 7 | 3,000 |
| 478693 | 4.5 | 1 | 8 | 2,500 |
| 478694 | 4.5 | 1 | 9 | 2,500 |
| 478681 | 4.5 | 1 | 10 | 2,500 |
| 478682 | 4.5 | 1 | 11 | 3,000 |
| 478683 | 4.5 | 1 | 12 | 2,500 |
| 478684 | 4.5 | 1 | 13 | 2,500 |
| 478685 | 4.5 | 1 | 14 | 3,000 |
| 478686 | 4.5 | 1 | 15 | 3,000 |
| 478687 | 4.5 | 1 | 16 | 3,000 |
| 478688 | 4.5 | 1 | 17 | 3,000 |
| 478689 | 4.5 | 1 | 18 | 3,000 |
| 478690 | 4.5 | 1 | 19 | 2,500 |
| 478691 | 4.5 | 1 | 20 | 2,500 |

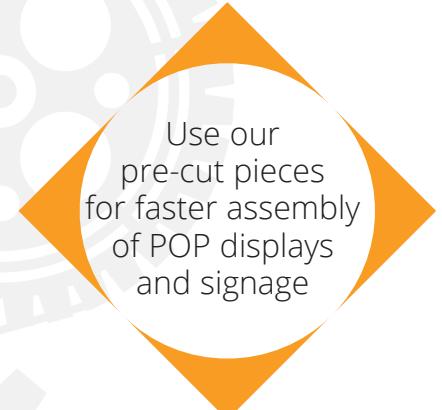TEMPORARY
DISPLAYSPRINT
FINISHING
BINDERYSEMI
PERMANENT
DISPLAYS


Use our pre-cut pieces for faster assembly of POP displays and signage



SEMI-PERMANENT / TEMPORARY MOUNTING APPLICATIONS

DK FILM® ACRYLIC

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

TEMPORARY
DISPLAYS

PRINT
FINISHING
BINDERY

SEMI
PERMANENT
DISPLAYS

DK FILM® ACRYLIC

Ideal for demanding indoor and moderate outdoor applications

Specifications

- Adhesive: Acrylic-based permanent on both sides
- Thickness: 0.5 mil film, 1.65 mil adhesive on each side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 275°F

Features

- Good shear strength
- High temperature resistance; good UV and weather resistance
- Good adhesion to flexible plastics
- Our rolls, up to 1,500 feet in length, are designed to improve efficiencies in automatic applications
- Wider widths are perfect for laminating and wide format graphics

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|----------------------|--------------|
| 472523 | 3.8 | 1/2 | 180 | 6-5/8 | 48 |
| 472524 | 3.8 | 3/4 | 180 | 6-5/8 | 32 |
| 472525 | 3.8 | 1 | 180 | 6-5/8 | 24 |

Laminating Tape, Wide Width

3" diameter core

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|----------------------|--------------|
| 472528 | 3.8 | 12 | 180 | 6-5/8 | 2 |
| 473162 | 3.8 | 24 | 180 | 6-5/8 | 2 |
| 473163 | 3.8 | 36 | 180 | 6-5/8 | 1 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



WHERE TO USE DK FILM® ACRYLIC

- Extrusions
- Nameplates
- Packaging and bindery
- Signage
- POP displays
- Corrugated folders/boxes
- Wire raceways
- Plastic fasteners

CALL AN EXPERT!

Can't find what you need?
Call us and let one of our
experts help you find the
right product for the job!

866 800 0775



DK FILM® HI-TACK ACRYLIC

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

DK FILM® HI-TACK ACRYLIC

Performs in the most demanding applications

Specifications

- Adhesive: Acrylic-based permanent on both sides
- Thickness: 0.5 mil film, 1.5 mil adhesive on each side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 275°F

Features

- Good initial tack
- High performing long-term adhesive bond
- Excellent UV resistance
- Good plasticizer resistance

TEMPORARY
DISPLAYS

PRINT
FINISHING
BINDERY

SEMI
PERMANENT
DISPLAYS

Standard Rolls

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|----------------------|--------------|
| 473037 | 3.5 | 1/2 | 180 | 5-7/8 | 48 |
| 473038 | 3.5 | 3/4 | 180 | 5-7/8 | 32 |
| 473039 | 3.5 | 1 | 180 | 5-7/8 | 24 |

3" diameter core



Laminating Tape, Wide Width

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|----------------------|--------------|
| 473168 | 3.5 | 12 | 180 | 5-7/8 | 2 |
| 473169 | 3.5 | 18 | 180 | 5-7/8 | 2 |
| 473170 | 3.5 | 24 | 180 | 5-7/8 | 2 |

3" diameter core

WHERE TO USE DK FILM® HI-TACK ACRYLIC

- Extrusions
- Nameplates
- Packaging and bindery
- Signage
- Wide format graphics
- POP displays
- Corrugated folders/boxes
- Wire raceways
- Plastic fasteners
- Graphic laminating

*Roll diameter listed is nominal with a tolerance of +/- 6%.



DURACO.
SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DK FILM® LSE

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

TEMPORARY
DISPLAYS

PRINT
FINISHING
BINDERY

SEMI
PERMANENT
DISPLAYS

DK FILM® LSE

Double-sided film tape with LSE adhesive system

Specifications


- Adhesive: Rubber-based permanent on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to °F

Features

- Extremely aggressive adhesive
- Quick initial bond to LSE plastics
- Faster bond to UV coated board, UV cured inks, and powder coated metals

Standard Rolls

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|------------------------|---------------|-----------|-------------------|--------------|
| 479517 | 6.5 | 1/2 | 1500 | 15" | 12 |
| 479518 | 6.5 | 3/4 | 1500 | 15" | 8 |
| 479519 | 6.5 | 1 | 750 | 11" | 6 |
| 479652 | 6.5 | 3/4 on 1 (FL) | 2000 | 17.5" | 5 |

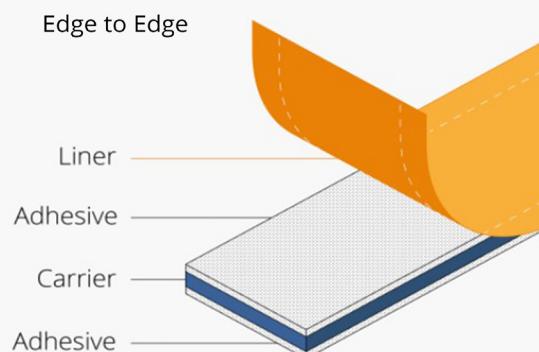

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

 DURACO.

DURACO® GOLD

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



DURACO® GOLD 9970

White PVC film carrier double-sided tape with excellent adhesion properties

Specifications

- Adhesive: Acrylic-based permanent on both sides
- Backing: PVC film
- Thickness: 9 mil
- Application Temperature: 65°F to 100°
- Service Temperature: 14°F to 176°F

Features

- The extra thickness of this film makes Duraco® Gold a great choice for textured or irregular surfaces

Standard Rolls

| Part Number | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|----------|-----------|-------------------|--------------|
| 476017 | 3/8 | 180 | 6-5/8 | 48 |
| 476018 | 1/2 | 180 | 6-5/8 | 36 |
| 476019 | 3/4 | 180 | 6-5/8 | 24 |
| 476020 | 1 | 180 | 6-5/8 | 18 |
| 476021 | 2 | 180 | 6-5/8 | 9 |

3" diameter core

Long Rolls

| Part Number | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|----------|-----------|-------------------|--------------|
| 476023 | 1/2 | 750 | 12-1/4 | 12 |
| 476024 | 3/4 | 750 | 12-1/4 | 8 |
| 476025 | 1 | 750 | 12-1/4 | 6 |

3" diameter core

*Roll diameter listed is nominal with a tolerance of +/- 6%.

WHERE TO USE DURACO® GOLD 9970

- General bonding
- Nameplates
- Decorative trim
- Signs
- POP displays
- Irregular surfaces


Duraco® Gold products are conformable and thinner than foam



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS


DURACO® RED

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

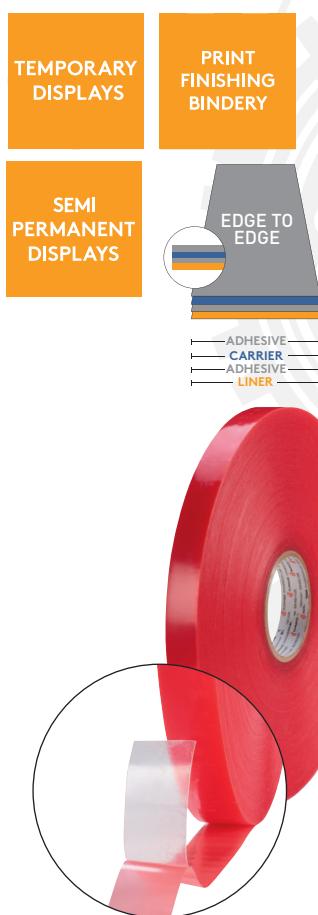

WHERE TO USE DURACO® RED

- Signs
- POP displays
- Graphics with UV coating
- Profile extrusions
- Low surface energy substrates

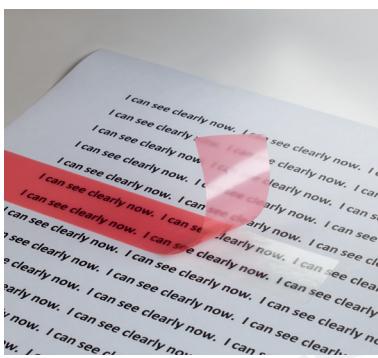

DURACO® RED

High performance, clear, double-sided tape designed for hard-to-stick applications

Specifications

- Adhesive: Modified Acrylic
- Thickness: 8 mil (adhesive with carrier)
- Application Temperature: 65°F to 100°
- Service Temperature: -14 to 300°F

Features

- Strong plasticizer resistance, tolerates high-temperature applications and sticks well to UV coatings
- Stocked in rolls up to 1,500 feet in length for automatic applications and pre-cut pieces to save time with hand applications

Standard Rolls

3" diameter core

| Part Number | Width | Length | Rolls/Carton |
|-------------|-------|--------|--------------|
| | in | ft | |
| 476647 | 3/8 | 180 | 64 |
| 476648 | 1/2 | 180 | 48 |
| 476649 | 3/4 | 180 | 32 |
| 476650 | 1 | 180 | 24 |
| 476651 | 2 | 180 | 12 |
| 476652 | 3 | 180 | 8 |

Long Rolls

3" diameter core

| Part Number | Width | Length | Rolls/Carton |
|-------------|-------|--------|--------------|
| | in | ft | |
| 476653 | 3/8 | 750 | 14 |
| 476654 | 1/2 | 750 | 12 |
| 478904 | 1/2 | 1,500 | 8 |
| 476655 | 3/4 | 750 | 9 |
| 478905 | 3/4 | 1,500 | 6 |
| 476656 | 1 | 750 | 6 |
| 478926 | 1 | 1,500 | 4 |

Pre-Cut Pieces on a Roll

| Part Number | Width | Length | Pieces/Roll |
|-------------|-------|--------|-------------|
| | in | in | |
| 476657 | 1/2 | 1 | 7,500 |
| 476658 | 1/2 | 2 | 5,000 |
| 476659 | 1/2 | 3 | 2,500 |
| 476660 | 1/2 | 4 | 2,500 |
| 478705 | 1/2 | 5 | 5,000 |
| 476667 | 1 | 1 | 5,000 |
| 476668 | 1 | 2 | 2,500 |
| 476669 | 1 | 3 | 2,000 |
| 478703 | 1 | 4 | 2,500 |
| 478704 | 1 | 5 | 2,500 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DURACO.

Duraco® Red's clarity keeps graphics sharp and readable — no yellow or foggy appearance

DURACO® RED FINGER LIFT

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

DURACO® RED FINGER LIFT


Finger lift version of Duraco's high performance, clear, double-sided tape designed for hard to stick applications

Specifications

- Adhesive: Modified acrylic
- Application Temperature: 65°F to 100°F
- Service Temperature: -14°F to 300°F

Features


- Transparent red liner to facilitate precise positioning of the tape
- Clear adhesive has excellent plasticizer resistance and tolerates high temperature applications
- Ideal for hard-to-stick applications, especially UV-coated materials

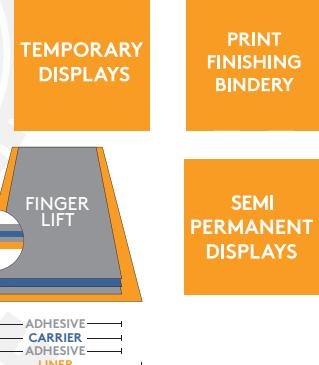

Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 478189 | 8 | 3 | 3/4 | 1/2 | 750 | 12 |
| 478190 | 8 | 3 | 1 | 3/4 | 750 | 12 |
| 478191 | 8 | 3 | 1- 1/4 | 1 | 750 | 12 |

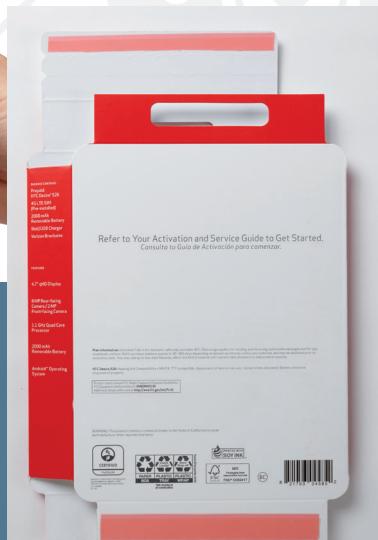

Duraco® Red, a customer favorite for hard-to-stick paperboard applications, is now offered with a Finger Lift edge to decrease assembly time during fulfillment.

WHERE TO USE DURACO® RED FINGER LIFT

- Signs
- POP displays
- Graphics with UV coating
- Profile extrusions
- Folding cartons
- Clear acrylic or glass

NOSKID FOAM

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

NoSKID FOAM

Non-skid foam coated on one side with a high tack permanent adhesive

Specifications

- Adhesive: Rubber-based permanent (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 150°F
- Service Temperature: -20°F to 175°F

Features

- Eliminates slippage

Diameters in a Pad

| Part Number | Thickness | Diameter | Diameters/ Pad | Diameters/ Carton |
|-------------|-----------|----------|-------------------|----------------------|
| | in | in | | |
| 471802 | 1/16 | 1/2 | 4 | 10,000 |
| 471805 | 1/8 | 1/2 | 4 | 5,000 |

SEMI
PERMANENT
DISPLAYS

PRINT
FINISHING
BINDERY

TEMPORARY
DISPLAYS



Diameters on a Roll

| Part Number | Thickness | Diameter | Diameters/ Roll |
|-------------|-----------|----------|--------------------|
| | in | in | |
| 471801 | 1/16 | 1/2 | 1,000 |
| 471800 | 1/16 | 1/2 | 25,000 |
| 471799 | 1/16 | 1/2 | 10,000 |
| 472888 | 1/16 | 3/4 | 7,500 |
| 472890 | 1/16 | 1 | 5,000 |
| 471804 | 1/8 | 1/2 | 1,000 |
| 471803 | 1/8 | 1/2 | 10,000 |
| 472889 | 1/8 | 3/4 | 6,000 |
| 472891 | 1/8 | 1 | 4,000 |

WHERE TO USE NoSKID FOAM

- Counter mats
- Mouse pads
- POP displays
- Small appliances
- Office products
- Cushioning
- Furniture

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



NoSKID Foam is used as the
backing for this counter mat

NOSKID FOAM

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

PRINT
FINISHING
BINDERY

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

Pre-Cut Pieces on a Roll

| Part Number | Thickness | | Width | Length | Pieces/Roll |
|-------------|-----------|-----|-------|--------|-------------|
| | in | in | | | |
| 471808 | 1/16 | 3/4 | 1 | 1 | 10,000 |
| 471809 | 1/16 | 3/4 | 3 | 1 | 2,500 |
| 471810 | 1/16 | 1 | 1 | 1 | 10,000 |
| 471811 | 1/16 | 1 | 3 | 1 | 4,000 |
| 471812 | 1/8 | 1/2 | 1 | 1 | 10,000 |
| 471816 | 1/8 | 1 | 1 | 1 | 10,000 |
| 471817 | 1/8 | 1 | 3 | 1 | 2,000 |

Pre-Cut Pieces in a Pad

| Part Number | Thickness | | Width | Length | Pieces/Pad | Pieces/Carton |
|-------------|-----------|-----|-------|--------|------------|---------------|
| | in | in | | | | |
| 471822 | 1/16 | 1 | 1 | 1 | 10 | 8,500 |
| 471823 | 1/16 | 1 | 3 | 1 | 10 | 2,500 |
| 471824 | 1/8 | 1/2 | 1 | 1 | 10 | 8,500 |
| 471828 | 1/8 | 1 | 1 | 1 | 10 | 7,500 |
| 471829 | 1/8 | 1 | 3 | 1 | 10 | 2,500 |



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

Always start with a
CLEAN SURFACE

Dirty, dusty and oily surfaces
will stop your tape from sticking

NOSKID FOAM

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Continuous Rolls

| Part Number | Thickness | Width | Length | 3" diameter core | Rolls/Carton |
|-------------|-----------|-------|--------|------------------|--------------|
| | in | in | ft | | |
| 471793 | 1/16 | 1/2 | 50 | | 30 |
| 471794 | 1/16 | 1 | 50 | | 15 |
| 471795 | 1/16 | 19 | 50 | | 4 |
| 471796 | 1/8 | 1/2 | 50 | | 20 |
| 471797 | 1/8 | 1 | 50 | | 10 |
| 471798 | 1/8 | 19 | 50 | | 4 |

SEMI
PERMANENT
DISPLAYS

PRINT
FINISHING
BINDERY

TEMPORARY
DISPLAYS

Sheets

| Part Number | Thickness | Width | Length | Sheets/Carton |
|-------------|-----------|-------|--------|---------------|
| | in | in | in | |
| 472430 | 1/8 | 19 | 29 | 40 |



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

 DURACO.



IN STOCK



866 800 0775

TIPS

- Use NoSkid Foam rolls to line store or display shelves to keep product from slipping.
- Use NoSkid Foam sheets to laminate your printed plastic sheets in POP counter mat production.

HOOK AND LOOP® FASTENERS

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Duraco® Hook and Loop fasteners have a strong adhesive that adheres quickly. The products come on a clear polyester liner for easy release.



DURACO® HOOK AND LOOP

Strong hook and loop fastening on a clear polyester liner for easy release

Specifications

- Adhesive: Rubber-based permanent (not recommended in applications with direct UV exposure)
- Material: 100% nylon with clear polyester film liner
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Features

- Clear polyester liner for easy release
- Bonds well to low surface energy plastics, corrugate, chipboard, glass, wood and powder-coated metal

Pre-Cut Pieces, White

| Part Number | | Width in | Length in | Pieces/Carton |
|-------------|-----------|-------------|--------------|---------------|
| Hook Side | Loop Side | | | |
| 476832 | 476852 | 3/4 | 3 | 5,000 |
| 476837 | 476857 | 1 | 2 | 5,000 |
| 476838 | 476858 | 1 | 3 | 5,000 |
| 476839 | 476859 | 1 | 4 | 3,000 |
| 476841 | 476861 | 1 | 10 | 2,000 |

Pre-Cut Pieces, Black

| Part Number | | Width in | Length in | Pieces/Carton |
|-------------|-----------|-------------|--------------|---------------|
| Hook Side | Loop Side | | | |
| 476877 | 476897 | 1 | 2 | 5,000 |
| 476878 | 476898 | 1 | 3 | 5,000 |
| 476879 | 476899 | 1 | 4 | 3,000 |
| 476880 | 476900 | 1 | 5 | 2,500 |

WHERE TO USE DURACO® HOOK AND LOOP

- Sample books
- POP displays
- Exhibits
- Enclosures
- Packaging
- Binders
- Pallet skirts

HOOK AND LOOP® FASTENERS

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Rolls, White

| Part Number | | Width | Length |
|-------------|-----------|-------|--------|
| Hook Side | Loop Side | in | yd |
| 476804 | 476816 | 1/2 | 25 |
| 476805 | 476817 | 5/8 | 25 |
| 476806 | 476818 | 3/4 | 25 |
| 476807 | 476819 | 1 | 25 |
| 476808 | 476820 | 1-1/2 | 25 |
| 476809 | 476821 | 2 | 25 |



Rolls, Black

| Part Number | | Width | Length |
|-------------|-----------|-------|--------|
| Hook Side | Loop Side | in | yd |
| 476798 | 476810 | 1/2 | 25 |
| 476799 | 476811 | 5/8 | 25 |
| 476800 | 476812 | 3/4 | 25 |
| 476803 | 476813 | 1 | 25 |
| 476801 | 476814 | 1-1/2 | 25 |
| 476802 | 476815 | 2 | 25 |

Coins on a Roll, White

| Part Number | | Diameter in | Coins/Roll | Rolls/Carton |
|-------------|-----------|-------------|------------|--------------|
| Hook Side | Loop Side | | | |
| 476959 | 476961 | 3/8 | 1,800 | 24 |
| 476946 | 476954 | 1/2 | 1,440 | 24 |
| 476947 | 476955 | 5/8 | 1,200 | 24 |
| 476948 | 476956 | 3/4 | 1,028 | 18 |
| 476949 | 476957 | 7/8 | 900 | 18 |

Coins on a Roll, Black

| Part Number | | Diameter in | Coins/Roll | Rolls/Carton |
|-------------|-----------|-------------|------------|--------------|
| Hook Side | Loop Side | | | |
| 476958 | 476960 | 3/8 | 1,800 | 24 |
| 476942 | 476950 | 1/2 | 1,440 | 24 |
| 476943 | 476951 | 5/8 | 1,200 | 24 |
| 476944 | 476952 | 3/4 | 1,028 | 18 |
| 476945 | 476953 | 7/8 | 900 | 18 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

 DURACO.

Use Duraco® Hook and Loop for signs that require frequent updating

TIP

Use Duraco® Hook and Loop coins for packaging closures.

HOOK AND LOOP® FASTENERS

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Spools, White

| Part Number | Width | Length | |
|-------------|-----------|--------|-------|
| Hook Side | Loop Side | in | yd |
| 476962 | 476963 | 1/2 | 1,200 |
| 476970 | 476971 | 3/4 | 800 |
| 476974 | 476975 | 1 | 650 |

Spools, Black

| Part Number | Width | Length | |
|-------------|-----------|--------|-------|
| Hook Side | Loop Side | in | yd |
| 476964 | 476965 | 1/2 | 1,200 |
| 476972 | 476973 | 3/4 | 800 |
| 476976 | 476977 | 1 | 650 |



ORDERING
HOOK?

DON'T
FORGET THE
LOOP!

NEED A REMOVABLE TAPE?



Check out our **REMO ONE®**
products starting on page 33

HOOK AND LOOP® FASTENERS

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Mated Sets, White

| Part Number | Width in | Length in | Sets/Carton |
|-------------|-------------|--------------|-------------|
| 476904 | 1/2 | 2 | 5,000 |
| 476911 | 3/4 | 2 | 4,000 |
| 476912 | 3/4 | 3 | 2,500 |
| 476913 | 3/4 | 4 | 2,000 |
| 476914 | 3/4 | 5 | 1,500 |
| 476915 | 3/4 | 10 | 750 |
| 476916 | 1 | 1 | 5,000 |
| 476917 | 1 | 2 | 2,500 |
| 476918 | 1 | 3 | 2,000 |
| 476919 | 1 | 4 | 1,500 |
| 476920 | 1 | 5 | 1,000 |
| 476921 | 1 | 10 | 500 |



Mated Sets, Black

| Part Number | Width in | Length in | Sets/Carton |
|-------------|-------------|--------------|-------------|
| 476931 | 3/4 | 2 | 4,000 |
| 476932 | 3/4 | 3 | 2,500 |
| 476933 | 3/4 | 4 | 2,000 |
| 476936 | 1 | 1 | 5,000 |
| 476937 | 1 | 2 | 2,500 |
| 476938 | 1 | 3 | 2,000 |
| 476939 | 1 | 4 | 1,500 |
| 476940 | 1 | 5 | 1,000 |
| 476941 | 1 | 10 | 500 |



Mated Coins on a Roll, White

| Part Number | Diameter in | Sets/Roll |
|-------------|----------------|-----------|
| 476982 | 3/8 | 1,500 |
| 476983 | 1/2 | 1,000 |
| 476985 | 3/4 | 1,000 |
| 476986 | 7/8 | 1,000 |



Mated Coins on a Roll, Black

| Part Number | Diameter in | Sets/Roll |
|-------------|----------------|-----------|
| 476990 | 3/8 | 1,500 |
| 476991 | 1/2 | 1,000 |
| 476993 | 3/4 | 1,000 |
| 476994 | 7/8 | 1,000 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

 DURACO.

HOOK AND LOOP® LOW PROFILE

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



WHERE TO USE DURACO® HOOK AND LOOP LOW PROFILE

- Sample books
- POP displays
- Exhibits
- Enclosures
- Packaging
- Binders



TRY BEFORE YOU BUY!

Call or go online
to order free samples.

DURACO® HOOK AND LOOP LOW PROFILE

Strong adhesive backing in a new slim profile that
is up to 40% thinner than standard hook and loop

Specifications

- Adhesive: Rubber-based permanent (not recommended in applications with direct UV exposure)
- Material: 100% nylon with clear polyester film liner
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Features

- Permanent adhesive
- Bond well to low surface energy plastics, corrugate, chipboard, glass, wood and powder-coated metal

Rolls, White

| Part Number | | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| Hook Side | Loop Side | in | yd | |
| 475792 | 475796 | 1/2 | 25 | 40 |
| 475793 | 475797 | 5/8 | 25 | 30 |
| 475794 | 475798 | 3/4 | 25 | 25 |
| 475795 | 475799 | 1 | 25 | 20 |

Rolls, Black

| Part Number | | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| Hook Side | Loop Side | in | yd | |
| 475800 | 475804 | 1/2 | 25 | 40 |
| 475801 | 475805 | 5/8 | 25 | 30 |
| 475802 | 475806 | 3/4 | 25 | 25 |
| 475803 | 475807 | 1 | 25 | 20 |

Coins on a Roll, White

| Part Number | | Diameter | Coins/Roll | Rolls/Carton |
|-------------|-----------|----------|------------|--------------|
| Hook Side | Loop Side | in | | |
| 475808 | 475812 | 1/2 | 1,440 | 30 |
| 475809 | 475813 | 5/8 | 1,200 | 25 |
| 475810 | 475814 | 3/4 | 1,028 | 20 |
| 475811 | 475815 | 7/8 | 900 | 20 |

Coins on a Roll, Black

| Part Number | | Diameter | Coins/Roll | Rolls/Carton |
|-------------|-----------|----------|------------|--------------|
| Hook Side | Loop Side | in | | |
| 475816 | 475820 | 1/2 | 1,440 | 30 |
| 475817 | 475821 | 5/8 | 1,200 | 25 |
| 475818 | 475822 | 3/4 | 1,028 | 20 |
| 475819 | 475823 | 7/8 | 900 | 20 |

THICK HOOK AND LOOP®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

DURACO® THICK HOOK AND LOOP

Combines Twin Stick® with Duraco® Hook and Loop for better gap filling and conformability in a hook and loop fastener

Specifications

- Adhesive: Rubber-based permanent (not recommended in applications with direct UV exposure)
- Material: 100% nylon with clear polyester film liner
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Features

- Permanent adhesive
- Better gap filling and conformability

Pre-Cut Pieces on a Roll, Black



| Part Number | | Foam Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|----------------|-------|--------|-------------|
| Hook Side | Loop Side | in | in | in | |
| 471697 | 471706 | 1/8 | 1 | 4 | 1,500 |



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



COMPARE THICK HOOK AND LOOP TO OUR STANDARD HOOK AND LOOP

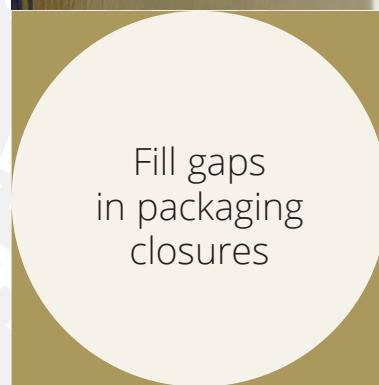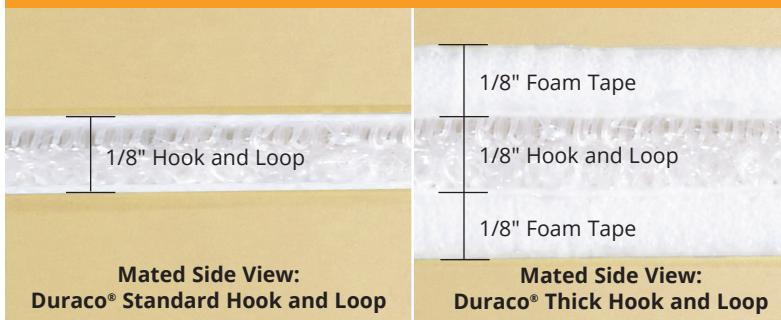

SEW ON HOOK AND LOOP®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



DURACO® HOOK AND LOOP SEW ON

Provides strong hook and loop fastening and durability for sew on applications

Specifications

- Material: 100% nylon
- No adhesive

Rolls, White

| Part Number | | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| Hook Side | Loop Side | in | yd | |
| 472966 | 472967 | 1/2 | 25 | 40 |
| 472970 | 472971 | 5/8 | 25 | 30 |
| 472974 | 472975 | 3/4 | 25 | 25 |
| 472978 | 472979 | 1 | 25 | 20 |
| 472982 | 472983 | 1-1/2 | 25 | 14 |
| 472986 | 472987 | 2 | 25 | 10 |
| 472990 | 472991 | 4 | 25 | 5 |

Rolls, Black

| Part Number | | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| Hook Side | Loop Side | in | yd | |
| 472968 | 472969 | 1/2 | 25 | 40 |
| 472972 | 472973 | 5/8 | 25 | 30 |
| 472976 | 472977 | 3/4 | 25 | 25 |
| 472980 | 472981 | 1 | 25 | 20 |
| 472984 | 472985 | 1-1/2 | 25 | 14 |
| 472988 | 472989 | 2 | 25 | 10 |
| 472992 | 472993 | 4 | 25 | 5 |

WHERE TO USE DURACO® HOOK AND LOOP SEW ON

- Banners
- Event design
- Trade shows
- Fabric displays
- Orthopaedics
- Medical devices
- Apparel



IN STOCK



866 800 0775

DURACO® MAGNETIC TAPE

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Duraco's Magnetic Tapes are a flexible magnetic material coated on one side with a permanent adhesive.



DURACO® MAGNETIC TAPE INDOOR

Flexible magnetic material with high initial tack

Specifications

- Adhesive: Rubber-based on one side
- Application Temperature: Above 50°F
- Service Temperature: 0°F to 150°F

Features

- Available in two thicknesses for wide application needs

Pre-Cut Pieces on a Roll

| Part Number | Thickness | Width | Length | Pounds Pull/Piece | Pieces/Roll |
|-------------|-----------|-------|--------|-------------------|-------------|
| | in | in | in | | |
| 473140 | .030 | 1 | 1 | 0.54 | 1,200 |
| 473141 | .030 | 1 | 2 | 1.08 | 600 |
| 473142 | .030 | 1 | 3 | 1.63 | 400 |
| 473143 | .030 | 1 | 4 | 2.17 | 300 |
| 473144 | .030 | 1 | 5 | 2.71 | 240 |
| 473145 | .060 | 1 | 1 | 1.17 | 1,200 |
| 473146 | .060 | 1 | 2 | 2.33 | 600 |
| 473147 | .060 | 1 | 3 | 3.50 | 400 |
| 473148 | .060 | 1 | 4 | 4.67 | 300 |
| 473149 | .060 | 1 | 5 | 5.83 | 240 |

WHERE TO USE DURACO® MAGNETIC TAPE INDOOR

.030"

- Lightweight applications
- Graphics
- Pocket attachment
- Calendars

.060"

- Lightweight plastics
- Appliance signage
- Banners
- Nameplates
- Advertising signs

Continuous Roll

3" diameter core

| Part Number | Thickness | Width | Length | Pounds Pull/Ft | Rolls/Carton |
|-------------|-----------|-------|--------|----------------|--------------|
| | in | in | ft | | |
| 473118 | .030 | 1/2 | 100 | 3.3 | 11 |
| 473119 | .030 | 3/4 | 100 | 4.9 | 7 |
| 473112 | .030 | 1 | 50 | 6.5 | 10 |
| 473120 | .030 | 1 | 100 | 6.5 | 5 |
| 473128 | .030 | 1 | 200 | 6.5 | 2 |
| 473121 | .030 | 1-1/2 | 100 | 9.8 | 3 |
| 473113 | .030 | 2 | 50 | 13.0 | 5 |
| 473122 | .030 | 2 | 100 | 13.0 | 2 |
| 473129 | .030 | 2 | 200 | 13.0 | 1 |
| 473114 | .060 | 1/2 | 50 | 7.0 | 11 |
| 473123 | .060 | 1/2 | 100 | 7.0 | 5 |
| 473115 | .060 | 3/4 | 50 | 10.5 | 7 |
| 473116 | .060 | 1 | 50 | 14.0 | 5 |
| 473125 | .060 | 1 | 100 | 14.0 | 2 |
| 473126 | .060 | 1-1/2 | 100 | 21.0 | 1 |
| 473117 | .060 | 2 | 50 | 28.0 | 2 |
| 473127 | .060 | 2 | 100 | 28.0 | 1 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

DURACO® MAGNETIC TAPE

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

DURACO® MAGNETIC TAPE OUTDOOR

Flexible magnetic material ideal for applications with exposure to sunlight or adherence to flexible plastics

Specifications

- Adhesive: Acrylic-based on one side
- Application Temperature: Above 50°F
- Service Temperature: 0°F to 200°F

Features

- Available in two thicknesses for wide application needs

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

Continuous Roll

3" diameter core

| Part Number | Thickness | Width | Length | Pounds Pull/Ft | Rolls/Carton |
|-------------|-----------|-------|--------|-------------------|--------------|
| | in | in | ft | | |
| 473100 | .030 | 1/2 | 100 | 3.3 | 11 |
| 473101 | .030 | 3/4 | 100 | 4.9 | 7 |
| 473102 | .030 | 1 | 100 | 6.5 | 5 |
| 473110 | .030 | 1 | 200 | 6.5 | 2 |
| 473096 | .060 | 1/2 | 50 | 7.0 | 11 |
| 473105 | .060 | 1/2 | 100 | 7.0 | 5 |
| 473097 | .060 | 3/4 | 50 | 10.5 | 7 |
| 473106 | .060 | 3/4 | 100 | 10.5 | 3 |
| 473098 | .060 | 1 | 50 | 14.0 | 5 |
| 473107 | .060 | 1 | 100 | 14.0 | 2 |
| 473109 | .060 | 2 | 100 | 28.0 | 1 |

WHERE TO USE DURACO® MAGNETIC TAPE OUTDOOR

.030"

- Lightweight applications
- Window graphics

.060"

- Lightweight plastics
- Banners
- Outdoor signage



FOR
COMPARISON...
**A dime is
approximately
.030" thick**



CALL AN EXPERT!

Can't find what you need?
Call us and let one of our
experts help you find the
right product for the job!

866 800 0775

Duraco's Film Tape is a double-sided tape with a film carrier and an extended liner for easy removal.

WHERE TO USE 4481

- Corrugated overnight boxes
- POP assembly

TEMPORARY
DISPLAYS

PRINT
FINISHING
BINDERY

SEMI
PERMANENT
DISPLAYS

4481 FINGER LIFT


General purpose

Specifications

- Adhesive: Hot melt rubber-based permanent
- Application Temperature: 50°F to 122°F
- Service Temperature: 0°F to 160°F
- Classifications: FDA Regulation 175.105 for indirect food contact

Features

- Double-sided PET film tape coated both sides with an aggressive hot-melt rubber-based permanent adhesive
- Ideal for permanently bonding paper and card stock

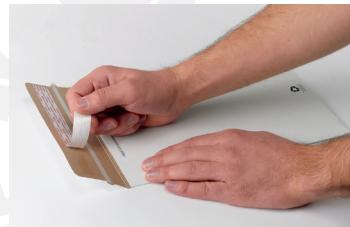

Short Rolls

3" diameter core


| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 492066 | 5.9 | 2.8 | 1/2 | 1/4 | 216 | 6 |
| 492069 | 5.9 | 2.8 | 3/4 | 1/2 | 216 | 6 |
| 492072 | 5.9 | 2.8 | 1 | 3/4 | 216 | 6 |

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 492067 | 5.9 | 2.8 | 1/2 | 1/4 | 1,080 | 12-1/2 |
| 492068 | 5.9 | 2.8 | 1/2 | 1/4 | 1,620 | 15-1/2 |
| 492070 | 5.9 | 2.8 | 3/4 | 1/2 | 1,080 | 12-1/2 |
| 492071 | 5.9 | 2.8 | 3/4 | 1/2 | 1,620 | 15-1/2 |
| 492073 | 5.9 | 2.8 | 1 | 3/4 | 1,080 | 12-1/2 |
| 492074 | 5.9 | 2.8 | 1 | 3/4 | 1,620 | 15-1/2 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.



ADHESIVE
CARRIER
ADHESIVE
LINER

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



4581 FINGER LIFT and 4581 EDGE TO EDGE


4581 Finger Lift is a double-sided tape with a film carrier with an extended liner for easy removal

Specifications

- Adhesive: Rubber-based permanent on both sides of PET film carrier
- Application Temperature: 65°F to 100°F
- Service Temperature: 0°F to 158°F
- Classifications: FDA Regulation 175.105 for indirect food contact

Features

- High shear properties
- High peel strength
- Minimal adhesive residue
- Aggressive quick stick
- Printed release liner
- Available in long length rolls for automatic application
- Efficient alternative to glue lines

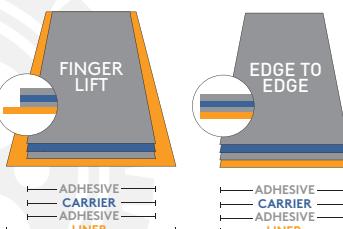

Finger Lift Rolls

| Part Number | Liner Width in | Adhesive Width in | Roll Length ft | Rolls/Carton |
|-------------|-------------------|----------------------|-------------------|--------------|
| 479092 | 1/2 | 1/4 | 216 | 40 |
| 479093 | 3/4 | 1/2 | 216 | 24 |
| 479094 | 1 | 3/4 | 216 | 20 |
| 479095 | 1/2 | 1/4 | 1620 | 10 |
| 479096 | 3/4 | 1/2 | 1620 | 7 |
| 479097 | 1 | 3/4 | 1620 | 5 |

3" diameter core

Edge to Edge Rolls

| Part Number | Liner Width in | Adhesive Width in | Roll Length ft | Rolls/Carton |
|-------------|-------------------|----------------------|-------------------|--------------|
| 479098 | 1/2 | 1/2 | 1500 | 12 |
| 479099 | 3/4 | 3/4 | 1500 | 8 |
| 479100 | 1 | 1 | 750 | 6 |

3" diameter core



Use for
indirect food
contact

WHERE TO USE 4581 FINGER LIFT and 4581 EDGE TO EDGE

- Point of Purchase displays
- Transit packaging
- Folding cartons
- Posters / Signage
- Overnight mailing envelopes



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

TEMPORARY
DISPLAYSPRINT
FINISHING
BINDERYSEMI
PERMANENT
DISPLAYS

4582 FINGER LIFT and 4582 DRY EDGE

4582 is a permanent tape with a polyester carrier and an adhesive system offering a high coat weight on the exposed side and very high coat weight on the liner side. The liner is a two-side silicone release paper for easy removal.

Specifications

- Adhesive: High tack rubber-based adhesive
- Application Temperature: 65°F to 100°F
- Service Temperature: 0°F to 158°F
- Classifications: FDA Regulation 175.105 for indirect food contact

Features

- Aggressive quick stick, high tack, and high peel adhesive system
- "Finger Lift" design allows for quick and easy liner removal
- Can be modified in long-length rolls for automated applications
- Offers a personalized message or graphic on its liner

Finger Lift Rolls

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|------------------------|-----------|----------------|-------------------|-----------|-------------------|
| 504669 | 5.5 | 2.2 | 1" | 3/4" (FL) | 1620 | 14.2" |

Dry Edge Rolls

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|------------------------|-----------|----------------|-------------------|-----------|-------------------|
| 504670 | 5.5 | 2.2 | 1-1/4" | 1" (DE) | 2000 | 15.7" |
| 504671 | 5.5 | 2.2 | 1-3/4" | 1-1/2" (DE) | 2000 | 15.7" |

CUSTOMIZE

- Personalized messaging or graphic on liner
- Liner overhang capabilities
- Converting and testing capabilities



WHERE TO USE 4582 FINGER LIFT and 4582 DRY EDGE

- Bags and pouches
- Corrugated overnight mailers
- E-commerce & Direct-to-Consumers boxes

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



DSTF FINGER LIFT

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Duraco's Finger Lift Tissue Tape is a hand-tearable, tissue supported double-sided tape. The Finger Lift liner has a dry edge on both sides, making liner removal fast and easy.



DURACO.
SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

WHERE TO USE DSTF

- Posters
- Lightweight POP
- Continuous stationery
- Envelopes
- Studio/commercial artwork

DSTF FINGER LIFT


General purpose

Specifications

- Adhesive: Hot melt rubber-based permanent
- Application Temperature: 35°F to 122°F
- Service Temperature: 0°F to 160°F
- Classifications: FDA Regulation 175.105 for indirect food contact

Features

- The industry standard general purpose product



Short Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 492000 | 3.3 | 2.2 | 1/2 | 1/4 | 108 | 3-1/2 |
| 491537 | 3.3 | 2.2 | 1/2 | 1/4 | 216 | 5 |
| 492003 | 3.3 | 2.2 | 3/4 | 1/2 | 216 | 5 |
| 492006 | 3.3 | 2.2 | 1 | 3/4 | 216 | 5 |

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 491535 | 3.3 | 2.2 | 1/2 | 1/4 | 1,300 | 11-1/4 |
| 491536 | 3.3 | 2.2 | 1/2 | 1/4 | 2,000 | 13-3/4 |
| 491517 | 3.3 | 2.2 | 3/4 | 1/2 | 1,300 | 11-1/4 |
| 491518 | 3.3 | 2.2 | 3/4 | 1/2 | 2,000 | 13-3/4 |
| 492007 | 3.3 | 2.2 | 1 | 3/4 | 1,300 | 11-1/4 |
| 492008 | 3.3 | 2.2 | 1 | 3/4 | 2,000 | 13-3/4 |
| 492012 | 3.3 | 2.2 | 1-1/2 | 1-3/16 | 1,300 | 11-1/4 |
| 491532 | 3.3 | 2.2 | 1-1/2 | 1-3/16 | 2,000 | 13-3/4 |
| 491534 | 3.3 | 2.2 | 2 | 1-5/8 | 2,000 | 13-3/4 |

Long Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 492001 | 3.3 | 2.2 | 1/2 | 1/4 | 3,000 | 16-3/4 |
| 492004 | 3.3 | 2.2 | 3/4 | 1/2 | 3,000 | 16-3/4 |
| 492009 | 3.3 | 2.2 | 1 | 3/4 | 3,000 | 16-3/4 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.

SR1 & SR5

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

SR1

Adhesive

A durable medium-peel removable acrylic adhesive that exhumes excellent peel and tack while maintaining smooth long-term removability from various substrates. The adhesive formulation provides superior anchorage to film or paper facestocks and has excellent heat, temperature, and UV exposure resistance.

APPLICATIONS

- Temporary decal products
- Pharmaceutical labels
- Removable laboratory labels
- Cleansing wipes closure
- Wide web advertising graphics
- Food rotation products
- Outdoor graphics

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS



SR5

Adhesive

A highly formulated ultra-removable acrylic adhesive exhibiting long-term removability without staining. The adhesive is uniquely designed to have low tack and peel on high-energy substrates while maintaining excellent anchorage to film facestocks and being resistant to various plasticizers, chemicals, heat, and UV.

APPLICATIONS

- Window signage
- Temporary decal products
- Automobile glass labelling
- Outdoor graphics
- Food rotation



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



**EXCEEDING YOUR
ADHESIVE EXPECTATIONS**

RE3 & RE5

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

RE3

Adhesive

A low-tack, ultra-removable adhesive designed for high-performance applications. The adhesive exhumes excellent anchorage to film facestocks while maintaining long-term removability and resistance to discoloration.

APPLICATIONS

- Temporary decals
- Window graphics
- Point-of-purchase displays
- Identification labels

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

Explore 3 Sigma's
easy-to-use, reliable,
and long-lasting
removable adhesive
technology

RE5

Adhesive

An all-purpose, light-duty, removable adhesive designed to bond aggressive to low-energy textured surfaces such as foam, metal, and plastic. The adhesive exhibits high initial tack and adhesion while offering smooth removability and shear.

APPLICATIONS

- Plastic signage
- Graphic overlaminates
- Pouch seal/reseal
- Overlaminates
- Polycarbonate labelling



REP4 & REP16

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

REP4

Adhesive

A removable, repositionable microsphere acrylic adhesive uniquely designed as an economical choice for labeling newspapers, magazines, envelopes, and office forms. The adhesive is not intended for stain-free removal from high-energy surfaces such as polycarbonate or chrome and is best suited for use with paper-based facestocks.

APPLICATIONS

- News notes
- Direct mail advertisements
- Magazine advertisements
- Office form labelling

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS



REP16

Adhesive

An ultra-removable repositionable adhesive based upon microsphere technology. The adhesive offers quick adhesion to various film substrates and can be applied repeatedly with minimal loss of initial tack.

APPLICATIONS

- Temporary wall signage
- Repositionable labels
- Page tabs
- Manufacturing aids



IN STOCK



937 440 3400

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

3 SIGMA

REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

REMO ONE®

Removable foam tape with aggressive permanent adhesive on one side and removable adhesive on the other



Specifications

- Adhesive: Permanent rubber-based on one side, removable adhesive on mounting side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- 1/2 lb. per sq. in. of tape (conditions and variables in applications can produce different stresses and affect holding power)
- Intended for one-time use on hard, non-delaminating surfaces

REMOVABLE
1 SIDE



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 473847 | 1/32 | 1/2 | 1/2 | 10,000 |
| 470797 | 1/32 | 1/2 | 1 | 10,000 |
| 473863 | 1/32 | 1/2 | 1-1/2 | 10,000 |
| 470798 | 1/32 | 1/2 | 2 | 10,000 |
| 470799 | 1/32 | 1/2 | 3 | 5,000 |
| 470800 | 1/32 | 1/2 | 4 | 5,000 |
| 470801 | 1/32 | 1/2 | 5 | 3,000 |
| 472892 | 1/32 | 1/2 | 6 | 3,000 |
| 472894 | 1/32 | 1/2 | 8 | 2,500 |
| 473855 | 1/32 | 3/4 | 3/4 | 10,000 |
| 470803 | 1/32 | 3/4 | 1 | 10,000 |
| 470804 | 1/32 | 3/4 | 2 | 5,000 |
| 470805 | 1/32 | 3/4 | 3 | 5,000 |
| 470806 | 1/32 | 3/4 | 4 | 2,500 |

(more 1/32" sizes continued on next page)

WHERE TO USE REMO ONE®

- Promotional and temporary signage
- Temporary and permanent displays
- Single use promotional graphics
- Wobblers and shelf talkers



REMOVES
CLEANLY.
NO RESIDUE.



REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

REMO ONE® MOST POPULAR

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470754 | 1/32 | 1 | 1 | 6,000 |
| 470748 | 1/32 | 1 | 2 | 6,000 |
| 470755 | 1/32 | 1 | 3 | 2,500 |
| 470809 | 1/32 | 1 | 4 | 2,500 |
| 470750 | 1/16 | 1 | 2 | 5,000 |
| 470751 | 1/16 | 1 | 3 | 2,500 |
| 470756 | 1/16 | 1 | 4 | 2,000 |
| 472912 | 1/16 | 1 | 6 | 2,000 |



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470754 | 1/32 | 1 | 1 | 6,000 |
| 470748 | 1/32 | 1 | 2 | 6,000 |
| 470755 | 1/32 | 1 | 3 | 2,500 |
| 470809 | 1/32 | 1 | 4 | 2,500 |
| 470810 | 1/32 | 1 | 5 | 2,000 |
| 472900 | 1/32 | 1 | 6 | 2,000 |
| 478714 | 1/32 | 1 | 7 | 2,500 |
| 478715 | 1/32 | 1 | 8 | 2,500 |
| 478713 | 1/32 | 1 | 10 | 2,500 |
| 473778 | 1/16 | 1/2 | 1/2 | 10,000 |
| 470830 | 1/16 | 1/2 | 1 | 10,000 |
| 470831 | 1/16 | 1/2 | 2 | 10,000 |
| 470832 | 1/16 | 1/2 | 3 | 5,000 |
| 470833 | 1/16 | 1/2 | 4 | 5,000 |
| 470834 | 1/16 | 1/2 | 5 | 3,000 |
| 472904 | 1/16 | 1/2 | 6 | 3,000 |
| 470835 | 1/16 | 1/2 | 10 | 2,000 |

(more 1/16" sizes continued on next page)

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

REMOVABLE
1 SIDE

SEMI
PERMANENT
DISPLAYS

REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470838 | 1/16 | 3/4 | 3 | 2,500 |
| 470749 | 1/16 | 1 | 1 | 5,000 |
| 473862 | 1/16 | 1 | 1-1/2 | 7,500 |
| 470750 | 1/16 | 1 | 2 | 5,000 |
| 470751 | 1/16 | 1 | 3 | 2,500 |
| 470756 | 1/16 | 1 | 4 | 2,000 |
| 470842 | 1/16 | 1 | 5 | 2,000 |
| 472912 | 1/16 | 1 | 6 | 2,000 |
| 478712 | 1/16 | 1 | 8 | 2,000 |
| 470863 | 1/8 | 1/2 | 2 | 7,500 |
| 470757 | 1/8 | 1 | 1 | 5,000 |
| 470752 | 1/8 | 1 | 2 | 2,500 |
| 470753 | 1/8 | 1 | 3 | 2,000 |
| 470872 | 1/8 | 1 | 4 | 2,000 |
| 470873 | 1/8 | 1 | 5 | 1,500 |
| 472924 | 1/8 | 1 | 6 | 1,500 |
| 475844 | 1/4 | 1/2 | 1 | 7,500 |
| 472928 | 1/4 | 1 | 1 | 5,000 |
| 475502 | 1/4 | 1 | 2 | 2,300 |
| 502131 | 1/4 | 1 | 3 | 1,000 |

TEMPORARY
DISPLAYS



CHANGEABLE
GRAPHICS

REMOVABLE
1 SIDE

SEMI
PERMANENT
DISPLAYS



Foam tapes allow for greater surface contact on irregular surfaces. Firm, even pressure improves the bond.



DURACO.
SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Pads are great to include in kits with all kinds of temporary signs

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 470812 | 1/32 | 1/2 | 1 | 10 | 7,500 |
| 470813 | 1/32 | 1/2 | 2 | 10 | 4,000 |
| 470814 | 1/32 | 1/2 | 3 | 10 | 2,500 |
| 470815 | 1/32 | 1/2 | 4 | 10 | 2,000 |
| 470816 | 1/32 | 1/2 | 5 | 10 | 1,500 |
| 470820 | 1/32 | 3/4 | 3 | 10 | 1,750 |
| 470824 | 1/32 | 1 | 1 | 10 | 4,000 |
| 470825 | 1/32 | 1 | 2 | 10 | 2,000 |
| 470826 | 1/32 | 1 | 3 | 10 | 1,250 |
| 470827 | 1/32 | 1 | 4 | 10 | 1,000 |
| 470828 | 1/32 | 1 | 5 | 5 | 750 |
| 470829 | 1/32 | 1 | 10 | 2 | 400 |
| 470844 | 1/16 | 1/2 | 1 | 10 | 7,500 |
| 470856 | 1/16 | 1 | 1 | 10 | 4,000 |
| 470857 | 1/16 | 1 | 2 | 10 | 2,000 |
| 470858 | 1/16 | 1 | 3 | 10 | 1,250 |
| 470859 | 1/16 | 1 | 4 | 10 | 1,000 |
| 470861 | 1/16 | 1 | 10 | 2 | 400 |
| 470884 | 1/8 | 1 | 1 | 10 | 3,000 |
| 470886 | 1/8 | 1 | 3 | 10 | 1,000 |
| 470887 | 1/8 | 1 | 4 | 10 | 750 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



IT'S SIMPLE. JUST SAMPLE!

If you're not sure which tape will work best, you can request **FREE SAMPLES** to ensure proper fit and function.

CALL US NOW!

866 800 0775



REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Short Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471444 | 1/32 | 1/2 | 30 | 72 |
| 471445 | 1/32 | 3/4 | 30 | 45 |
| 471446 | 1/32 | 1 | 30 | 36 |
| 471447 | 1/16 | 1/2 | 30 | 40 |
| 471449 | 1/16 | 1 | 30 | 20 |

1.5" diameter core

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

REMOVABLE
1 SIDE

Standard Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471435 | 1/32 | 1/2 | 216 | 24 |
| 472226 | 1/32 | 1/2 | 216 | 12 |
| 471439 | 1/32 | 3/4 | 216 | 16 |
| 471436 | 1/32 | 1 | 216 | 12 |
| 471437 | 1/16 | 1/2 | 216 | 24 |
| 471440 | 1/16 | 3/4 | 216 | 16 |
| 471438 | 1/16 | 1 | 216 | 12 |
| 471441 | 1/8 | 1/2 | 108 | 24 |
| 471442 | 1/8 | 3/4 | 108 | 16 |
| 471443 | 1/8 | 1 | 108 | 12 |

Long Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 472883 | 1/32 | 1/2 | 900 | 16 |
| 472884 | 1/16 | 1/2 | 450 | 24 |

Remo One®
used on
price channels
allows removal
without adhesive
residue



REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Standard Roll, Black

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471453 | 1/32 | 1/2 | 216 | 12 |
| 471454 | 1/32 | 1 | 216 | 12 |
| 471455 | 1/16 | 1/2 | 216 | 12 |
| 471456 | 1/16 | 1 | 216 | 12 |
| 471457 | 1/8 | 1/2 | 108 | 12 |
| 471458 | 1/8 | 1 | 108 | 12 |

Diameters on a Roll, White

| Part Number | Thickness in | Diameter in | Pieces/Roll |
|-------------|-----------------|----------------|-------------|
| 502457 | 1/32 | 1/2 | 5,000 |
| 502445 | 1/32 | 3/4 | 4,000 |
| 475837 | 1/32 | 1 | 3,000 |
| 502452 | 1/16 | 1/2 | 5,000 |
| 475839 | 1/16 | 1 | 3,000 |



Die cut
diameters
conform to
your shape!

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

 DURACO.

REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, Black


| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470952 | 1/32 | 1 | 3 | 2,500 |
| 470976 | 1/16 | 1/2 | 3 | 5,000 |
| 470986 | 1/16 | 1 | 1 | 5,000 |
| 470988 | 1/16 | 1 | 3 | 2,500 |
| 471020 | 1/8 | 1 | 1 | 6,500 |
| 471022 | 1/8 | 1 | 3 | 2,000 |

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

REMOVABLE
1 SIDE

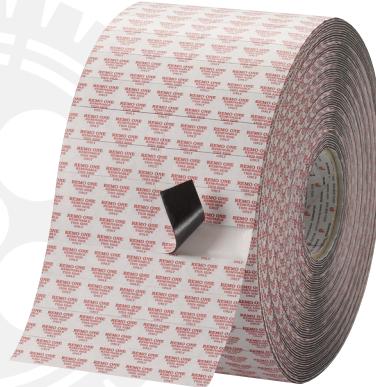

TIP

Remo One® eliminates the retailer's concern about tape residue.

NEED A CLEAR FOAM TAPE?

Check out our
REMO TWO® CLEAR



REMO ONE® PLUS

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



WHERE TO USE REMO ONE® PLUS

- Temporary signs
- Price channel mouldings
- Nameplates
- Shelf dividers
- Point of Purchase displays
- Metal shelving
- Merchandising racks

REMO ONE® PLUS

Duraco's Remo One Plus is a double-sided adhesive foam tape that is removable one side and permanent on the other. Removes from hard non-delaminating surfaces such as wood, plastic and glass while offering four times the strength of standard removable tape.

Specifications

- Adhesive: Rubber-based on both sides; one side permanent, one side removable
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Features

- Four times the strength of standard removable products
- Printed liner identifies the removable side
- Available in pre-cut pieces and continuous rolls
- Leaves no foam residue behind when removed
- Intended for one-time use on hard, non-delaminating surfaces

Continuous Roll, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 479037 | 1/32 | 1/2 | 216 | 24 |
| 479038 | 1/32 | 3/4 | 216 | 16 |
| 479039 | 1/32 | 1 | 216 | 12 |
| 479040 | 1/16 | 1/2 | 216 | 24 |
| 479041 | 1/16 | 3/4 | 216 | 16 |
| 479042 | 1/16 | 1 | 216 | 12 |

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length ft | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 479043 | 1/32 | 1 | 1 | 6,000 |
| 479044 | 1/32 | 1 | 2 | 6,000 |
| 479045 | 1/32 | 1 | 3 | 2,500 |
| 479046 | 1/32 | 1 | 4 | 2,500 |
| 479047 | 1/32 | 1 | 6 | 2,000 |
| 479048 | 1/16 | 1 | 1 | 5,000 |
| 479049 | 1/16 | 1 | 2 | 5,000 |
| 479050 | 1/16 | 1 | 3 | 2,500 |
| 479051 | 1/16 | 1 | 4 | 2,000 |
| 479052 | 1/16 | 1 | 6 | 2,000 |
| 479053 | 1/8 | 1 | 1 | 5,000 |
| 479054 | 1/8 | 1 | 2 | 2,500 |
| 479055 | 1/8 | 1 | 3 | 2,000 |
| 479056 | 1/8 | 1 | 4 | 2,000 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



THICK REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



THICK REMO ONE®

Removable foam block with aggressive permanent adhesive on one side and removable adhesive on the other, used to create 3-D effects

Specifications

- Adhesive: Permanent rubber-based on one side, removable adhesive on mounting side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Intended for one-time use on hard, non-delaminating surfaces
- For lightweight applications or filling gaps

Pre-cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470758 | 1/2 | 1 | 1 | 3,000 |
| 470760 | 1/2 | 1 | 2 | 1,800 |
| 470762 | 1/2 | 1 | 3 | 1,200 |

Pre-cut Pieces in a Pad, White

| Part Number | Thickness | Width | Length | Pieces/Pad | Pieces/Carton |
|-------------|-----------|-------|--------|------------|---------------|
| | in | in | in | | |
| 470759 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470768 | 3/4 | 1 | 1 | 36 | 4,320 |
| 470770 | 3/4 | 1 | 3 | 12 | 1,800 |
| 470773 | 1 | 1 | 1 | 36 | 6,012 |
| 470775 | 1 | 1 | 3 | 12 | 1,440 |
| 470784 | 1-1/2 | 1-1/2 | 1-1/2 | 12 | 1,440 |
| 470787 | 2 | 2 | 2 | 1 | 840 |



WHERE TO USE THICK REMO ONE®

- Promotional and temporary signage
- Temporary and permanent displays
- Single use graphics
- Wobblers and shelf talkers

TRY BEFORE YOU BUY!

Call or go online
to order free samples.

THICK REMO ONE®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470889 | 1/2 | 1 | 1 | 3,000 |

TEMPORARY DISPLAYS

CHANGEABLE GRAPHICS

SEMI PERMANENT DISPLAYS

REMOVABLE 1 SIDE


Pre-cut Pieces in a Pad, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470890 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470904 | 1 | 1 | 1 | 36 | 6,012 |

SEMI-PERMANENT / TEMPORARY MOUNTING APPLICATIONS



Thick Remo One®

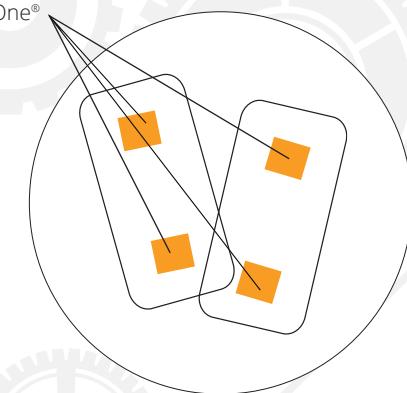

Place foam blocks 1" - 2" from the edge of dimensional graphics to create a clean 3-D effect.



TRY BEFORE YOU BUY!

Call or go online to order free samples.

REMO TWO® CLEAR

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



REMO TWO® CLEAR

Double-sided clear tape with a removable adhesive on both sides

Specifications

- Adhesive: Removable acrylic-based adhesive on both sides
- Application Temperature: 40°F to 175°F
- Service Temperature: 20°F to 180°F

Features

- Double-sided foam tape
- Removes cleanly from most hard, non-delaminating surfaces even after extended periods of time
- Intended for one-time use on hard, non-delaminating surfaces

Rolls

3" diameter core

| Part Number | Thickness | | Width in | Length ft |
|-------------|-----------|--|-------------|--------------|
| | in | | | |
| 477180 | 1/32 | | 1/2 | 216 |
| 477181 | 1/32 | | 3/4 | 216 |
| 477182 | 1/32 | | 1 | 216 |

Pre-Cut Pieces on a Roll

| Part Number | Thickness | | Width in | Length in | Pieces/Roll |
|-------------|-----------|--|-------------|--------------|-------------|
| | in | | | | |
| 477183 | 1/32 | | 1 | 1 | 1250 |
| 477184 | 1/32 | | 1 | 2 | 1250 |
| 477185 | 1/32 | | 1 | 3 | 1000 |
| 477186 | 1/32 | | 1 | 4 | 1000 |

WHERE TO USE REMO TWO® CLEAR

- Promotional and temporary signage
- Single use graphics
- Temporary, plastic displays
- Clear acrylic displays

IT'S SIMPLE. JUST SAMPLE!

If you're not sure which tape will work best, you can request **FREE SAMPLES** to ensure proper fit and function.

CALL US NOW!

866 800 0775

REMO TWO®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



REMO TWO®

Double-sided adhesive foam tape with our removable adhesive on both sides

Specifications

- Adhesive: Removable adhesive on both sides (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Holding Power: 1/2 lb. per sq. in. of tape (conditions and variables in applications can produce different stresses and affect holding power)
- Intended for one-time use on hard, non-delaminating surfaces

Pre-cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 471089 | 1/32 | 1/2 | 1 | 10,000 |
| 471090 | 1/32 | 1/2 | 2 | 10,000 |
| 471091 | 1/32 | 1/2 | 3 | 5,000 |
| 471093 | 1/32 | 1/2 | 5 | 3,000 |
| 471097 | 1/32 | 3/4 | 3 | 5,000 |
| 471101 | 1/32 | 1 | 1 | 6,000 |
| 471102 | 1/32 | 1 | 2 | 6,000 |
| 471103 | 1/32 | 1 | 3 | 2,500 |
| 471104 | 1/32 | 1 | 4 | 2,500 |
| 471105 | 1/32 | 1 | 5 | 2,000 |
| 471125 | 1/16 | 1/2 | 1 | 10,000 |
| 471126 | 1/16 | 1/2 | 2 | 10,000 |
| 471132 | 1/16 | 3/4 | 2 | 5,000 |
| 471133 | 1/16 | 3/4 | 3 | 2,500 |
| 471040 | 1/16 | 1 | 1 | 5,000 |
| 471137 | 1/16 | 1 | 2 | 5,000 |
| 471041 | 1/16 | 1 | 3 | 2,500 |
| 471138 | 1/16 | 1 | 4 | 2,000 |
| 471139 | 1/16 | 1 | 5 | 2,000 |
| 471042 | 1/8 | 1 | 1 | 5,000 |
| 471169 | 1/8 | 1 | 2 | 2,700 |
| 471170 | 1/8 | 1 | 3 | 2,000 |
| 472887 | 1/4 | 1 | 1 | 5,000 |

WHERE TO USE REMO TWO®

- Promotional and temporary signage
- Single use graphics
- Consumer packaging
- In kits unattached to graphics

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

REMO TWO®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 471107 | 1/32 | 1/2 | 1 | 10 | 7,500 |
| 471108 | 1/32 | 1/2 | 2 | 10 | 4,000 |
| 471119 | 1/32 | 1 | 1 | 10 | 4,000 |
| 471120 | 1/32 | 1 | 2 | 10 | 2,000 |
| 471121 | 1/32 | 1 | 3 | 10 | 1,250 |
| 471122 | 1/32 | 1 | 4 | 10 | 1,000 |
| 471123 | 1/32 | 1 | 5 | 5 | 750 |
| 471152 | 1/16 | 3/4 | 10 | 2 | 500 |
| 471153 | 1/16 | 1 | 1 | 10 | 4,000 |
| 471154 | 1/16 | 1 | 2 | 10 | 2,000 |
| 471155 | 1/16 | 1 | 3 | 10 | 1,250 |
| 471183 | 1/8 | 1 | 1 | 10 | 3,000 |
| 471184 | 1/8 | 1 | 2 | 10 | 1,500 |
| 471185 | 1/8 | 1 | 3 | 10 | 1,000 |

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

REMOVABLE
2 SIDES



TIP

Use Remo Two® when packed out for in-store application to avoid wrong side use.

**SPRING
SALE**

**BIG
SAVINGS**

On All
New Sandals

Use Remo Two® to attach promotional or seasonal signs without damaging the walls.*

*Removes cleanly from most hard, non-delaminating surfaces.



Remo Two®

REMO TWO®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

**REMOVABLE
2 SIDES**

SEMI
PERMANENT
DISPLAYS

Short Rolls, White

1.5" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471474 | 1/32 | 1/2 | 30 | 72 |
| 471476 | 1/32 | 1 | 30 | 36 |
| 471477 | 1/16 | 1/2 | 30 | 40 |
| 471478 | 1/16 | 3/4 | 30 | 25 |
| 471479 | 1/16 | 1 | 30 | 20 |
| 471482 | 1/8 | 1 | 15 | 20 |

Standard Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471465 | 1/32 | 1/2 | 216 | 12 |
| 471466 | 1/32 | 3/4 | 216 | 16 |
| 471467 | 1/32 | 1 | 216 | 12 |
| 471468 | 1/16 | 1/2 | 216 | 12 |
| 471469 | 1/16 | 3/4 | 216 | 16 |
| 471470 | 1/16 | 1 | 216 | 12 |
| 471471 | 1/8 | 1/2 | 108 | 12 |
| 471472 | 1/8 | 3/4 | 108 | 16 |
| 471473 | 1/8 | 1 | 108 | 12 |

Standard Rolls, Black

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471483 | 1/32 | 1/2 | 216 | 12 |
| 471484 | 1/32 | 1 | 216 | 12 |
| 471485 | 1/16 | 1/2 | 216 | 12 |
| 471486 | 1/16 | 1 | 216 | 12 |

SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS



Always start with a
CLEAN SURFACE

Dirty, dusty and oily surfaces
will stop your tape from sticking

THICK REMO TWO®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

THICK REMO TWO®

Double-sided adhesive foam block with removable adhesive on both sides, used to create 3-D effects

Specifications

- Adhesive: Removable on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- For lightweight applications or filling gaps

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

REMOVABLE
2 SIDES


Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 471043 | 1/2 | 1 | 1 | 3,000 |



Pre-Cut Pieces in a Pad, White

| Part Number | Thickness | Width | Length | Pieces/Pad | Pieces/Carton |
|-------------|-----------|-------|--------|------------|---------------|
| | in | in | in | | |
| 471044 | 1/2 | 1 | 1 | 12 | 2,400 |
| 471053 | 3/4 | 1 | 1 | 36 | 4,320 |

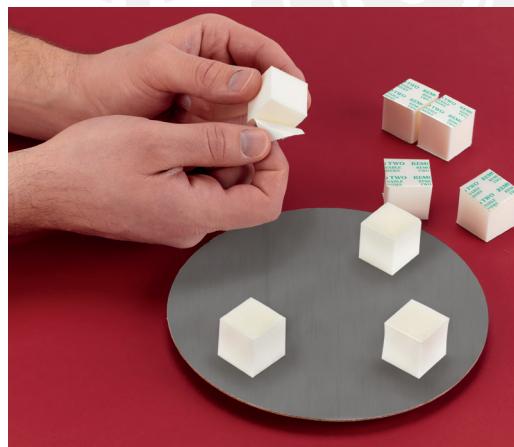

WHERE TO USE THICK REMO TWO®

- Promotional and temporary signage
- Temporary and permanent displays
- Single use graphics
- Wobblers and shelf talkers

THICK REMO TWO®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS



Individual Pieces, White

| Part Number | Thickness | Width | Length | Pieces/carton |
|-------------|-----------|-------|--------|---------------|
| | in | in | in | |
| 471058 | 1 | 1 | 1 | 6,012 |
| 471060 | 1 | 1 | 3 | 1,440 |
| 471072 | 2 | 2 | 2 | 840 |



TIPS

- Attach temporary, lightweight graphics at location making them "stand out" on existing signs or displays.
- Try black Thick Remo Two® on dark backgrounds.
- Place foam blocks 1" – 2" from the edge of dimensional graphics to create a clean 3-D effect.

FAST SHIPPING

**When time is limited,
every second counts.**

So, we've extended our
same day shipping hours to better
meet your needs on in-stock products.

SEMIPERMANENT / TEMPORARY
MOUNTING APPLICATIONS

THICK REMO TWO®

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 471188 | 1/2 | 1 | 1 | 3,000 |

TEMPORARY DISPLAYS

CHANGEABLE GRAPHICS

SEMI PERMANENT DISPLAYS

REMOVABLE 2 SIDES

Pre-Cut Pieces in a Pad, Black


| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 471189 | 1/2 | 1 | 1 | 12 | 2,400 |

Individual pieces, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Carton |
|-------------|-----------------|-------------|--------------|---------------|
| 471203 | 1 | 1 | 1 | 6,012 |



Use black foam blocks
on dark backgrounds
for a
clean
look.

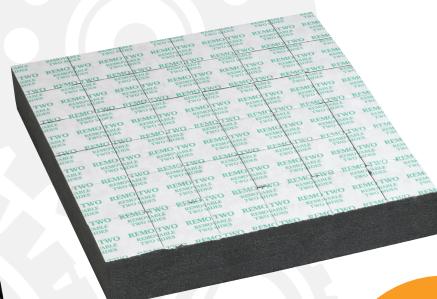

1/2" block

1" block



**TRY BEFORE
YOU BUY!**

Call or go online
to order free samples.



SEMI-PERMANENT / TEMPORARY
MOUNTING APPLICATIONS

PRESSURE SENSITIVE LABELS

SEMI-PERMANENT/TEMPORARY MOUNTING APPLICATIONS

LFWX049

Adhesive

A 2 mil bright white PET film with a digital matte laser coating on the face. The adhesive is a "shelf" that is ideal when the label is applied to a shelf or racking. The liner is a 6.8 mil PK Layflat laser sheet. This product is laser compatible, heat resistant, and water resistant. The digital top coat works well with IGEN, Nexpress, and other color lasers.

APPLICATIONS

- Shelving
- Temporary decals
- Window graphics
- Point-of-purchase displays

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS



LWX074

Adhesive

A 3 mil bright white PET film with a digital matte laser coating on the face and featuring a laser safe mid-tack removable adhesive. The liner is a 4.6 mil super Layflat laser sheet. This product is laser compatible, heat resistant, and water resistant. The digital top coat works well with IGEN, Nexpress, and other color lasers including LED printers.

APPLICATIONS

- Metal shelving
- Floor graphics



LPPR051

Adhesive

A two mil clear BOPP flame treated product designed to be printable via flexo and/or thermal transfer. This product features a "cling" ultra-removable adhesive that cleanly removes from glass and other surfaces, and 40# SCK release liner. The BOPP offers water resistant and tear resistant properties.

APPLICATIONS

- Window decals

SEMI-PERMANENT / TEMPORARY
RETAIL APPLICATIONS

TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

Duraco's Foam Tapes have a flexible foam carrier that fills gaps and allows irregular surfaces to be adhered.



TWIN STICK®

POP favorite, double-sided permanent foam tape

Specifications

- Adhesive: Rubber-based permanent on both sides (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Holding Power: 1 lb. per 1 sq. in. of tape (conditions and variables in applications can produce different stresses and affect holding power)

TWIN STICK®

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470096 | 1/32 | 1/4 | 1/4 | 15,000 |
| 470031 | 1/32 | 1/4 | 1/2 | 15,000 |
| 470097 | 1/32 | 1/4 | 1 | 10,000 |
| 472725 | 1/32 | 1/4 | 2 | 7,500 |
| 472726 | 1/32 | 1/4 | 3 | 5,000 |
| 500100 | 1/32 | 5/16 | 1-1/2 | 25,000 |
| 470027 | 1/32 | 1/2 | 1/2 | 10,000 |
| 470098 | 1/32 | 1/2 | 3/4 | 10,000 |
| 470000 | 1/32 | 1/2 | 1 | 10,000 |
| 472730 | 1/32 | 1/2 | 1-1/2 | 10,000 |
| 470001 | 1/32 | 1/2 | 2 | 10,000 |
| 472731 | 1/32 | 1/2 | 2-1/2 | 7,500 |
| 470002 | 1/32 | 1/2 | 3 | 5,000 |
| 472732 | 1/32 | 1/2 | 3-1/2 | 5,000 |
| 470003 | 1/32 | 1/2 | 4 | 5,000 |

(more 1/32" sizes continued on next page)

WHERE TO USE TWIN STICK®

- Semi-permanent displays
- Temporary displays
- Signage
- Caps and headers
- Corrugate
- Chipboard
- Wood
- Low surface energy plastics
- Powder-coated materials
- UV coatings

Pre-cut
pieces for
quick
application

TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

TWIN STICK® MOST POPULAR

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470008 | 1/32 | 1 | 3 | 4,000 |
| 470029 | 1/32 | 1 | 4 | 2,500 |
| 470145 | 1/32 | 1 | 6 | 2,000 |
| 470017 | 1/16 | 1 | 2 | 5,000 |
| 470041 | 1/16 | 1 | 3 | 5,000 |
| 470019 | 1/16 | 1 | 4 | 2,500 |



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 472733 | 1/32 | 1/2 | 4-1/2 | 4,000 |
| 470099 | 1/32 | 1/2 | 5 | 3,000 |
| 470100 | 1/32 | 1/2 | 6 | 3,000 |
| 470101 | 1/32 | 1/2 | 7 | 2,000 |
| 470102 | 1/32 | 1/2 | 8 | 2,000 |
| 470103 | 1/32 | 1/2 | 9 | 2,000 |
| 470104 | 1/32 | 1/2 | 10 | 2,000 |
| 470105 | 1/32 | 1/2 | 11 | 2,000 |
| 470106 | 1/32 | 1/2 | 12 | 2,000 |
| 470120 | 1/32 | 3/4 | 3/4 | 10,000 |
| 470121 | 1/32 | 3/4 | 1 | 10,000 |
| 472744 | 1/32 | 3/4 | 1-1/2 | 7,500 |
| 470004 | 1/32 | 3/4 | 2 | 5,000 |
| 472745 | 1/32 | 3/4 | 2-1/2 | 5,000 |
| 470005 | 1/32 | 3/4 | 3 | 5,000 |
| 472746 | 1/32 | 3/4 | 3-1/2 | 3,500 |
| 470122 | 1/32 | 3/4 | 4 | 2,500 |
| 470123 | 1/32 | 3/4 | 5 | 2,000 |
| 470124 | 1/32 | 3/4 | 6 | 2,000 |
| 470125 | 1/32 | 3/4 | 7 | 2,000 |
| 470126 | 1/32 | 3/4 | 8 | 2,000 |
| 470127 | 1/32 | 3/4 | 9 | 2,000 |
| 478767 | 1/32 | 3/4 | 10 | 2,000 |

(more 1/32" sizes continued on next page)

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS

SEMI
PERMANENT
DISPLAYS



CUSTOM CONVERTING

Projects come in every shape and size — your tape solution should, too.

Low minimum,
fast turnaround.

PERMANENT MOUNTING APPLICATIONS



TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

DURACO.

PERMANENT MOUNTING APPLICATIONS



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| | | | | |
| 478768 | 1/32 | 3/4 | 12 | 2,500 |
| 478769 | 1/32 | 3/4 | 15 | 2,000 |
| 478770 | 1/32 | 3/4 | 17 | 2,500 |
| 470006 | 1/32 | 1 | 1 | 10,000 |
| 470040 | 1/32 | 1 | 1 | 20,000 |
| 472758 | 1/32 | 1 | 1-1/2 | 7,500 |
| 470007 | 1/32 | 1 | 2 | 6,300 |
| 472759 | 1/32 | 1 | 2-1/2 | 5,000 |
| 470008 | 1/32 | 1 | 3 | 4,000 |
| 472760 | 1/32 | 1 | 3-1/2 | 3,000 |
| 470029 | 1/32 | 1 | 4 | 2,500 |
| 472761 | 1/32 | 1 | 4-1/2 | 2,000 |
| 470144 | 1/32 | 1 | 5 | 2,000 |
| 470145 | 1/32 | 1 | 6 | 2,000 |
| 478762 | 1/32 | 1 | 7 | 2,500 |
| 478763 | 1/32 | 1 | 8 | 2,500 |
| 478764 | 1/32 | 1 | 9 | 2,500 |
| 478750 | 1/32 | 1 | 10 | 2,500 |
| 478751 | 1/32 | 1 | 11 | 2,500 |
| 478752 | 1/32 | 1 | 12 | 2,500 |
| 478753 | 1/32 | 1 | 13 | 2,500 |
| 478754 | 1/32 | 1 | 14 | 2,500 |
| 478755 | 1/32 | 1 | 15 | 2,500 |
| 478756 | 1/32 | 1 | 16 | 2,500 |
| 478757 | 1/32 | 1 | 17 | 2,500 |
| 478758 | 1/32 | 1 | 18 | 2,500 |
| 478760 | 1/32 | 1 | 20 | 2,000 |
| 478761 | 1/32 | 1 | 24 | 2,500 |
| 472776 | 1/32 | 1-1/2 | 1-1/2 | 5,000 |
| 470165 | 1/32 | 2 | 2 | 2,000 |
| 474789 | 1/32 | 2 | 3 | 1,500 |
| 475369 | 1/32 | 2 | 4 | 1,500 |
| 472777 | 1/32 | 3 | 3 | 1,500 |
| 470028 | 1/16 | 1/2 | 1/2 | 10,000 |
| 470009 | 1/16 | 1/2 | 1 | 10,000 |
| 470010 | 1/16 | 1/2 | 2 | 10,000 |
| 472779 | 1/16 | 1/2 | 2-1/2 | 7,500 |
| 470011 | 1/16 | 1/2 | 3 | 5,000 |
| 470012 | 1/16 | 1/2 | 4 | 5,000 |

(more 1/16" sizes continued on next page)

Securely attach
wobblers to displays
(see other uses on page 10)

TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470249 | 1/16 | 1/2 | 5 | 3,000 |
| 470013 | 1/16 | 1/2 | 6 | 3,000 |
| 478742 | 1/16 | 1/2 | 13 | 3,000 |
| 470269 | 1/16 | 3/4 | 3/4 | 10,000 |
| 470270 | 1/16 | 3/4 | 1 | 10,000 |
| 472792 | 1/16 | 3/4 | 1-1/2 | 7,500 |
| 470014 | 1/16 | 3/4 | 2 | 5,000 |
| 500739 | 1/16 | 3/4 | 2-3/4 | 5,000 |
| 470015 | 1/16 | 3/4 | 3 | 2,500 |
| 470271 | 1/16 | 3/4 | 4 | 2,500 |
| 470273 | 1/16 | 3/4 | 6 | 2,000 |
| 470016 | 1/16 | 1 | 1 | 10,000 |
| 470038 | 1/16 | 1 | 1 | 20,000 |
| 472806 | 1/16 | 1 | 1-1/2 | 7,500 |
| 470017 | 1/16 | 1 | 2 | 5,000 |
| 472807 | 1/16 | 1 | 2-1/2 | 5,000 |
| 470018 | 1/16 | 1 | 3 | 2,500 |
| 470041 | 1/16 | 1 | 3 | 5,000 |
| 472808 | 1/16 | 1 | 3-1/2 | 2,500 |
| 470019 | 1/16 | 1 | 4 | 2,500 |
| 470293 | 1/16 | 1 | 5 | 2,000 |
| 470294 | 1/16 | 1 | 6 | 2,000 |
| 478739 | 1/16 | 1 | 7 | 2,000 |
| 478740 | 1/16 | 1 | 8 | 2,000 |
| 478741 | 1/16 | 1 | 9 | 2,500 |
| 478728 | 1/16 | 1 | 10 | 2,000 |
| 478729 | 1/16 | 1 | 11 | 2,000 |
| 478730 | 1/16 | 1 | 12 | 2,000 |
| 478731 | 1/16 | 1 | 13 | 2,500 |
| 478732 | 1/16 | 1 | 14 | 2,500 |
| 478733 | 1/16 | 1 | 15 | 2,500 |
| 478734 | 1/16 | 1 | 16 | 2,500 |
| 478735 | 1/16 | 1 | 17 | 2,500 |
| 478736 | 1/16 | 1 | 18 | 2,500 |

(more 1/16" sizes continued on next page)

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS

SEMI
PERMANENT
DISPLAYS



Securely
attach dispensers
to surfaces
without drilling
or mechanical
fasteners

PERMANENT MOUNTING APPLICATIONS



TWIN STICK®

PERMANENT MOUNTING APPLICATIONS



Pre-cut
pieces for
quick
application

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 478738 | 1/16 | 1 | 20 | 2,000 |
| 470314 | 1/16 | 2 | 2 | 2,000 |
| 475339 | 1/16 | 2 | 3 | 1,500 |
| 475290 | 1/16 | 2 | 4 | 1,500 |
| 472828 | 1/16 | 3 | 3 | 1,000 |
| 474708 | 1/16 | 4 | 4 | 600 |
| 470395 | 1/8 | 1/2 | 1/2 | 10,000 |
| 470397 | 1/8 | 1/2 | 1 | 10,000 |
| 470398 | 1/8 | 1/2 | 2 | 7,500 |
| 470399 | 1/8 | 1/2 | 3 | 5,000 |
| 470400 | 1/8 | 1/2 | 4 | 5,000 |
| 470020 | 1/8 | 3/4 | 2 | 5,000 |
| 470410 | 1/8 | 3/4 | 4 | 1,500 |
| 470412 | 1/8 | 3/4 | 6 | 1,500 |
| 470022 | 1/8 | 1 | 1 | 6,500 |
| 470042 | 1/8 | 1 | 1 | 12,000 |
| 472838 | 1/8 | 1 | 1-1/2 | 5,000 |
| 470023 | 1/8 | 1 | 2 | 2,700 |
| 472839 | 1/8 | 1 | 2-1/2 | 2,000 |
| 470024 | 1/8 | 1 | 3 | 2,000 |
| 470039 | 1/8 | 1 | 3 | 3,000 |
| 470025 | 1/8 | 1 | 4 | 2,000 |
| 478776 | 1/8 | 1 | 5 | 1,500 |
| 478777 | 1/8 | 1 | 6 | 1,500 |
| 478778 | 1/8 | 1 | 7 | 1,500 |
| 478773 | 1/8 | 1 | 12 | 1,500 |
| 472855 | 1/8 | 3 | 3 | 750 |
| 475365 | 1/8 | 4 | 4 | 400 |

(more stock sizes continued on next page)



PERMANENT MOUNTING APPLICATIONS

TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, White


| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470473 | 3/16 | 3/4 | 3 | 2,000 |
| 470034 | 3/16 | 1 | 1 | 5,000 |
| 470476 | 3/16 | 1 | 2 | 2,000 |
| 470477 | 3/16 | 1 | 3 | 1,500 |
| 472857 | 1/4 | 1/2 | 1/2 | 8,000 |
| 470487 | 1/4 | 1/2 | 1 | 7,500 |
| 470488 | 1/4 | 1/2 | 2 | 3,000 |
| 470026 | 1/4 | 1 | 1 | 5,000 |
| 472858 | 1/4 | 1 | 1-1/2 | 3,000 |
| 470502 | 1/4 | 1 | 2 | 2,300 |
| 470033 | 1/4 | 1 | 3 | 1,000 |
| 470503 | 1/4 | 1 | 4 | 1,000 |
| 470504 | 1/4 | 1 | 5 | 1,000 |
| 470505 | 1/4 | 1 | 6 | 750 |

TEMPORARY DISPLAYS
PERMANENT DISPLAYS

SEMI PERMANENT DISPLAYS



Use long pre-cut strips to assemble displays

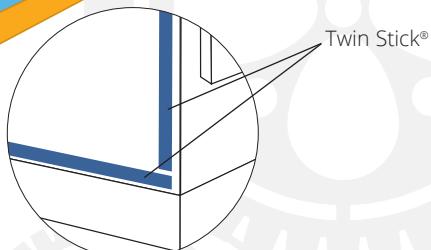


PERMANENT MOUNTING APPLICATIONS



Foam tapes allow for greater surface contact on irregular surfaces. Firm, even pressure improves the bond.

ADHESIVE CONTACT



TWIN STICK®


PERMANENT MOUNTING APPLICATIONS



PERMANENT MOUNTING APPLICATIONS



SEMI
PERMANENT
DISPLAYS

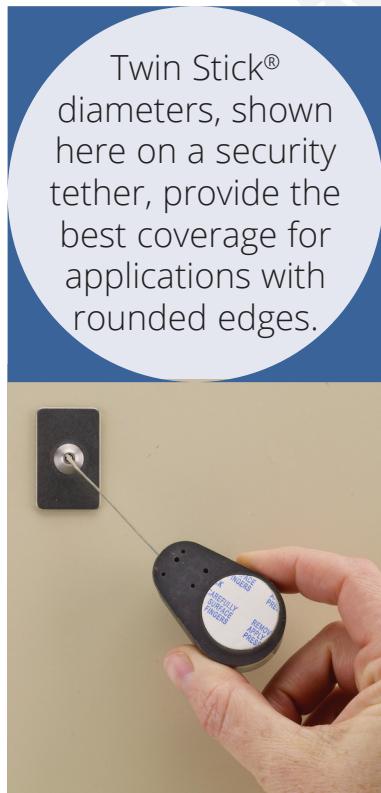

Twin Stick® diameters, shown here on a security tether, provide the best coverage for applications with rounded edges.

Diameters on a Roll, White

| Part Number | Thickness in | Diameter in | Pieces/Roll |
|-------------|-----------------|----------------|-------------|
| | | | |
| 475829 | 1/32 | 3/8 | 10,000 |
| 472715 | 1/32 | 1/2 | 5,000 |
| 472718 | 1/32 | 3/4 | 4,000 |
| 472721 | 1/32 | 1 | 3,000 |
| 472724 | 1/32 | 1-1/4 | 2,000 |
| 502335 | 1/32 | 1-1/2 | 2,000 |
| 502436 | 1/16 | 3/8 | 10,000 |
| 472716 | 1/16 | 1/2 | 5,000 |
| 472719 | 1/16 | 3/4 | 4,000 |
| 472722 | 1/16 | 1 | 3,000 |
| 472717 | 1/8 | 1/2 | 3,000 |

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470166 | 1/32 | 1/2 | 1/2 | 10 | 7,500 |
| 470168 | 1/32 | 1/2 | 1 | 10 | 7,500 |
| 470169 | 1/32 | 1/2 | 2 | 10 | 4,000 |
| 470170 | 1/32 | 1/2 | 3 | 10 | 2,500 |
| 470173 | 1/32 | 1/2 | 6 | 10 | 1,500 |
| 500400 | 1/32 | 3/4 | 3 | 1 | 10,000 |
| 470203 | 1/32 | 3/4 | 10 | 2 | 500 |
| 475024 | 1/32 | 1 | 1 | 1 | 5,000 |
| 470219 | 1/32 | 1 | 1 | 10 | 4,000 |
| 470220 | 1/32 | 1 | 2 | 10 | 2,000 |
| 475107 | 1/32 | 1 | 3 | 1 | 3,000 |
| 470221 | 1/32 | 1 | 3 | 10 | 1,250 |
| 475165 | 1/32 | 1 | 4 | 2 | 2,500 |
| 470222 | 1/32 | 1 | 4 | 10 | 1,000 |
| 470223 | 1/32 | 1 | 5 | 5 | 750 |
| 470224 | 1/32 | 1 | 6 | 5 | 600 |
| 470239 | 1/32 | 1 | 21 | 2 | 170 |
| 470244 | 1/32 | 2 | 2 | 4 | 900 |

(more stock sizes continued on next page)

TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 501060 | 1/16 | 1/2 | 2-1/2 | 2 | 25,000 |
| 501630 | 1/16 | 3/4 | 3/4 | 4 | 10,000 |
| 501138 | 1/16 | 1 | 1 | 2 | 20,000 |
| 470368 | 1/16 | 1 | 1 | 10 | 4,000 |
| 470369 | 1/16 | 1 | 2 | 10 | 2,000 |
| 470370 | 1/16 | 1 | 3 | 10 | 1,250 |
| 470371 | 1/16 | 1 | 4 | 10 | 1,000 |
| 470377 | 1/16 | 1 | 10 | 2 | 400 |
| 470390 | 1/16 | 1 | 23 | 2 | 170 |
| 475836 | 1/16 | 8-1/2 | 11 | 1 | 200 |
| 470427 | 1/8 | 1/2 | 1 | 10 | 6,000 |
| 470450 | 1/8 | 1 | 1 | 10 | 3,000 |
| 470451 | 1/8 | 1 | 2 | 10 | 1,500 |
| 470452 | 1/8 | 1 | 3 | 10 | 1,000 |
| 470453 | 1/8 | 1 | 4 | 10 | 750 |
| 470455 | 1/8 | 1 | 6 | 5 | 500 |
| 473465 | 3/16 | 1/2 | 1-1/2 | 10 | 8,400 |
| 474191 | 1/4 | 3/4 | 2-3/4 | 1 | 6,000 |
| 470510 | 1/4 | 1 | 1 | 10 | 2,200 |
| 470511 | 1/4 | 1 | 3 | 10 | 780 |

TEMPORARY DISPLAYS
PERMANENT DISPLAYS

SEMI PERMANENT DISPLAYS




TIP

Pads are great for kits, or when your job calls for smaller quantities.

Know your foam tape thickness

- For most POP display applications, use 1/32".
- For corrugated or textured surfaces, use 1/16".
- For filling gaps, use 1/8" or greater.
- For 3-D effect, use 3/8" or greater.

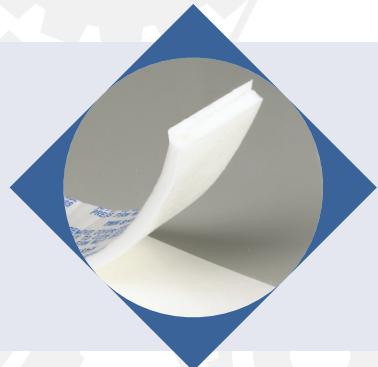

PERMANENT MOUNTING APPLICATIONS



TWIN STICK®

PERMANENT MOUNTING APPLICATIONS



Call or go online
to order free samples.

Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470553 | 1/32 | 1/2 | 1 | 10,000 |
| 470554 | 1/32 | 1/2 | 2 | 10,000 |
| 470555 | 1/32 | 1/2 | 3 | 5,000 |
| 470556 | 1/32 | 1/2 | 4 | 5,000 |
| 470569 | 1/32 | 3/4 | 2 | 5,000 |
| 470570 | 1/32 | 3/4 | 3 | 5,000 |
| 470573 | 1/32 | 3/4 | 6 | 2,000 |
| 470518 | 1/32 | 1 | 1 | 20,000 |
| 470583 | 1/32 | 1 | 2 | 6,300 |
| 470584 | 1/32 | 1 | 3 | 4,000 |
| 470585 | 1/32 | 1 | 4 | 2,500 |
| 470586 | 1/32 | 1 | 5 | 2,000 |
| 470587 | 1/32 | 1 | 6 | 2,000 |
| 478724 | 1/32 | 1 | 8 | 1,500 |
| 478721 | 1/32 | 1 | 10 | 1,500 |
| 470636 | 1/16 | 1/2 | 8 | 2,000 |
| 470639 | 1/16 | 3/4 | 1 | 10,000 |
| 470512 | 1/16 | 1 | 1 | 10,000 |
| 470644 | 1/16 | 1 | 2 | 5,000 |
| 470513 | 1/16 | 1 | 3 | 2,500 |
| 470645 | 1/16 | 1 | 4 | 2,500 |
| 470647 | 1/16 | 1 | 6 | 2,000 |
| 478720 | 1/16 | 1 | 8 | 1,500 |
| 470686 | 1/8 | 1/2 | 1 | 10,000 |
| 475498 | 1/8 | 3/4 | 1-1/2 | 5,000 |
| 470704 | 1/8 | 3/4 | 9 | 1,500 |
| 470706 | 1/8 | 1 | 1 | 6,500 |
| 470514 | 1/8 | 1 | 2 | 2,700 |
| 470708 | 1/8 | 1 | 3 | 2,000 |
| 470709 | 1/8 | 1 | 4 | 2,000 |
| 478725 | 1/8 | 1 | 6 | 1,500 |
| 478726 | 1/8 | 1 | 7 | 1,500 |
| 478727 | 1/8 | 1 | 8 | 1,500 |
| 470715 | 1/8 | 1 | 10 | 1,000 |
| 474306 | 1/8 | 2 | 2 | 2,000 |
| 502320 | 1/4 | 1 | 1 | 5,000 |
| 502321 | 1/4 | 1 | 2 | 2,300 |
| 502323 | 1/4 | 1 | 3 | 1,000 |

TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470619 | 1/32 | 1 | 1 | 10 | 4,000 |
| 470676 | 1/16 | 1 | 3 | 10 | 1,250 |

TEMPORARY DISPLAYS
PERMANENT DISPLAYS

SEMI PERMANENT DISPLAYS





Diameters on a Roll, Black

| Part Number | Thickness in | Diameter in | Pieces/Roll |
|-------------|-----------------|----------------|-------------|
| 502432 | 1/32 | 1/2 | 5,000 |
| 502440 | 1/32 | 3/4 | 4,000 |

PERMANENT MOUNTING APPLICATIONS

DURACO

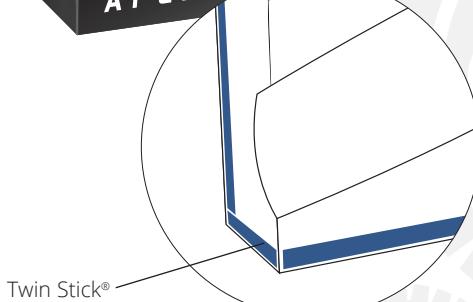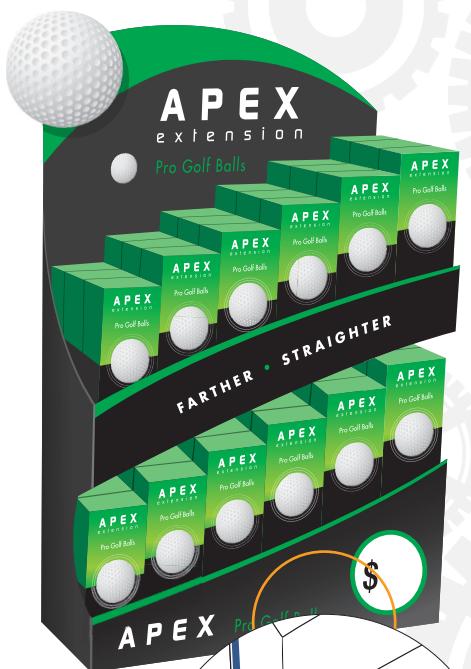

Use black Twin Stick® to create invisible bonds when assembling black or dark displays

TIP

Pack extra pads with your product or display for emergency repairs.

THICK TWIN STICK®

PERMANENT MOUNTING APPLICATIONS



THICK TWIN STICK®

Foam blocks with permanent adhesive can be used to create a 3-D effect or fill gaps

Specifications


- Adhesive: Rubber-based permanent on both sides (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 472859 | 3/8 | 1 | 1 | 4,000 |
| 472860 | 3/8 | 1 | 2 | 2,000 |
| 472861 | 3/8 | 1 | 3 | 1,100 |
| 472865 | 1/2 | 1/2 | 1 | 5,000 |
| 470030 | 1/2 | 1 | 1 | 3,000 |
| 470044 | 1/2 | 1 | 2 | 1,800 |
| 470032 | 1/2 | 1 | 3 | 1,200 |
| 470047 | 1/2 | 2 | 2 | 900 |
| 470049 | 1/2 | 3 | 3 | 300 |

Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470515 | 1/2 | 1 | 1 | 3,000 |
| 470521 | 1/2 | 1 | 2 | 1,800 |
| 470523 | 1/2 | 1 | 3 | 1,200 |

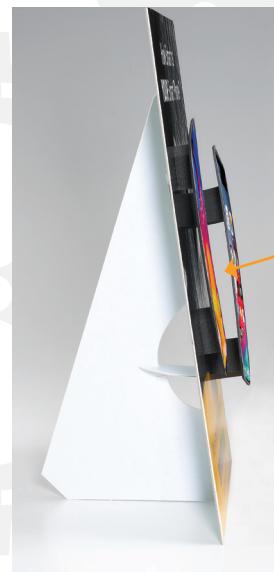

Place blocks behind artwork to create 3-D effects!

WHERE TO USE THICK TWIN STICK®


- Corrugate
- Chipboard
- Wood
- Low surface energy plastics
- Powder-coated materials
- UV coatings

THICK TWIN STICK®

PERMANENT MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470043 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470045 | 1/2 | 1 | 2 | 10 | 1,000 |
| 470048 | 1/2 | 2 | 2 | 4 | 600 |
| 472866 | 3/4 | 3/4 | 1 | 24 | 2,400 |
| 470037 | 3/4 | 1 | 1 | 36 | 4,320 |
| 470051 | 3/4 | 1 | 2 | 18 | 3,600 |
| 470052 | 3/4 | 1 | 3 | 12 | 1,800 |
| 470053 | 3/4 | 2 | 2 | 9 | 1,800 |
| 470035 | 1 | 1 | 1 | 36 | 2,520 |
| 470036 | 1 | 1 | 1 | 36 | 6,012 |
| 470055 | 1 | 1 | 2 | 18 | 2,898 |
| 470056 | 1 | 1 | 3 | 12 | 1,440 |
| 470060 | 1 | 2 | 2 | 9 | 1,440 |
| 470061 | 1 | 3 | 3 | 4 | 600 |
| 470062 | 1-1/4 | 1 | 1 | 36 | 4,608 |
| 470065 | 1-1/2 | 1 | 1 | 36 | 3,420 |
| 470068 | 1-1/2 | 1-1/2 | 1-1/2 | 12 | 1,440 |
| 470070 | 2 | 1-1/2 | 1-1/2 | 12 | 1,200 |
| 470071 | 2 | 2 | 2 | 1 | 840 |



PERMANENT MOUNTING APPLICATIONS

DURACO.

THICK TWIN STICK® PERMANENT MOUNTING APPLICATIONS



TIPS

- Use black Thick Twin Stick® on dark backgrounds.
- Place foam blocks 1"- 2" from the edge of dimensional graphics to create a clean 3-D effect.

Pre-cut Pieces in a Pad, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 470520 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470529 | 3/4 | 1 | 1 | 36 | 4,320 |
| 470530 | 3/4 | 1 | 2 | 18 | 3,600 |
| 470519 | 1 | 1 | 1 | 36 | 2,520 |
| 470516 | 1 | 1 | 1 | 36 | 6,012 |
| 470534 | 1 | 1 | 2 | 18 | 2,898 |
| 470535 | 1 | 1 | 3 | 12 | 1,440 |
| 470550 | 2 | 2 | 2 | 1 | 840 |



See our
**REMOVABLE
FOAM BLOCKS**

Pages 40 and 45



CAN'T FIND
YOUR SIZE?
Contact our
tape experts!

866 800 0775

TWIN STICK® LSE

PERMANENT MOUNTING APPLICATIONS

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS

SEMI
PERMANENT
DISPLAYS

TWIN STICK® LSE

Versatile double-sided foam tape ideal for low surface energy substrates.

Specifications

- Adhesive: Rubber-based permanent on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 479489 | 1/32 | 1/2 | 1 | 10,000 |
| 479490 | 1/32 | 1/2 | 2 | 10,000 |
| 479491 | 1/32 | 1/2 | 3 | 5,000 |
| 479492 | 1/32 | 1/2 | 4 | 5,000 |
| 479493 | 1/32 | 1 | 1 | 10,000 |
| 479494 | 1/32 | 1 | 2 | 6,300 |
| 479495 | 1/32 | 1 | 3 | 4,000 |
| 479496 | 1/32 | 1 | 4 | 2,500 |
| 479497 | 1/16 | 1/2 | 1 | 10,000 |
| 479498 | 1/16 | 1/2 | 2 | 10,000 |
| 479499 | 1/16 | 1/2 | 3 | 5,000 |
| 479500 | 1/16 | 1/2 | 4 | 5,000 |
| 479501 | 1/16 | 1 | 1 | 10,000 |
| 479502 | 1/16 | 1 | 2 | 5,000 |
| 479503 | 1/16 | 1 | 3 | 2,500 |
| 479504 | 1/16 | 1 | 4 | 2,500 |
| 479505 | 1/8 | 1 | 1 | 500 |
| 479506 | 1/8 | 1 | 2 | 2,700 |
| 479507 | 1/8 | 1 | 3 | 2,000 |
| 479508 | 1/8 | 1 | 4 | 2,000 |

WHERE TO USE TWIN STICK® LSE

- Temporary displays
- Packaging and bindery
- Signage
- Corrugated folder/box
- Plastic fasteners

PERMANENT MOUNTING APPLICATIONS



DUBL KOTE®

PERMANENT MOUNTING APPLICATIONS



DUBL KOTE®

Versatile double-sided foam tape ideal for hand or automatic application

Specifications

- Adhesive: Rubber-based permanent on both sides (Not recommended for direct UV exposure. See application notes for more information.)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Holding Power: 1 lb. per 1 sq. in. of tape (variables in applications can produce different stresses and affect holding power)

Short Rolls, White

1.5" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 502613 | 1/32 | 1/2 | 54 | 180 |
| 501737 | 1/32 | 1/2 | 108 | 80 |
| 471366 | 1/32 | 3/4 | 30 | 45 |
| 471367 | 1/32 | 1 | 30 | 36 |
| 471368 | 1/16 | 1/2 | 30 | 40 |
| 500931 | 1/16 | 3/4 | 108 | 13 |
| 471370 | 1/16 | 1 | 30 | 20 |
| 500930 | 1/16 | 1 | 108 | 10 |

WHERE TO USE DUBL KOTE®

- Temporary, semi-permanent and permanent displays
- Plastic extrusions
- Wire management raceways
- Signage
- End caps
- Headers
- Textured surface bonding
- Plastic fasteners
- Decorative trim
- Shower enclosures
- Mirror mounting
- Shower splash guard
- Metal to metal bonding
- Wall files
- Air fresheners
- Protective trim

TIPS

- Use a roller when hand applying Dubl Kote® to ensure a smooth, even application.
- Firm, even pressure across the entire surface is essential for the adhesive to bond.
- Short rolls are useful to include in kits for on-site assembly or field repairs.

DUBL KOTE®

PERMANENT MOUNTING APPLICATIONS

Standard Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471355 | 1/32 | 1/4 | 216 | 48 |
| 472230 | 1/32 | 1/4 | 216 | 12 |
| 471346 | 1/32 | 3/8 | 216 | 32 |
| 472231 | 1/32 | 3/8 | 216 | 12 |
| 471339 | 1/32 | 1/2 | 216 | 24 |
| 472232 | 1/32 | 1/2 | 216 | 12 |
| 500595 | 1/32 | 21/32 | 216 | 19 |
| 501699 | 1/32 | 11/16 | 216 | 18 |
| 471340 | 1/32 | 3/4 | 216 | 16 |
| 471341 | 1/32 | 1 | 216 | 12 |
| 473607 | 1/32 | 1-1/4 | 216 | 10 |
| 471374 | 1/32 | 1-1/2 | 216 | 8 |
| 471375 | 1/32 | 2 | 216 | 6 |
| 471376 | 1/32 | 3 | 216 | 4 |
| 473617 | 1/32 | 3-1/2 | 216 | 5 |
| 472867 | 1/32 | 4 | 216 | 3 |
| 473626 | 1/32 | 13-1/2 | 216 | 1 |
| 502626 | 1/32 | 23 | 216 | 1 |
| 473608 | 1/32 | 24 | 216 | 1 |
| 501918 | 1/32 | 28 | 216 | 1 |
| 471377 | 1/16 | 1/4 | 216 | 48 |
| 472229 | 1/16 | 1/4 | 216 | 12 |
| 473594 | 1/16 | 3/8 | 216 | 32 |
| 471342 | 1/16 | 1/2 | 216 | 24 |
| 472233 | 1/16 | 1/2 | 216 | 12 |
| 471343 | 1/16 | 3/4 | 216 | 16 |
| 471344 | 1/16 | 1 | 216 | 12 |
| 471356 | 1/16 | 1-1/2 | 216 | 8 |
| 475542 | 1/16 | 1-5/8 | 216 | 7 |
| 471378 | 1/16 | 2 | 216 | 6 |
| 473649 | 1/16 | 2-1/8 | 216 | 7 |
| 471379 | 1/16 | 3 | 216 | 4 |
| 473625 | 1/16 | 24 | 216 | 1 |
| 471357 | 1/8 | 1/2 | 108 | 24 |
| 472234 | 1/8 | 1/2 | 108 | 12 |
| 472870 | 1/8 | 5/8 | 108 | 19 |
| 471345 | 1/8 | 3/4 | 108 | 16 |
| 471353 | 1/8 | 1 | 108 | 12 |
| 471380 | 1/8 | 2 | 108 | 6 |
| 471382 | 3/16 | 1/2 | 75 | 20 |
| 471384 | 3/16 | 1 | 75 | 10 |
| 471385 | 1/4 | 1/2 | 50 | 20 |
| 471386 | 1/4 | 3/4 | 50 | 13 |
| 471387 | 1/4 | 1 | 50 | 10 |

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS

SEMI
PERMANENT
DISPLAYS



Use
Dubl Kote®
for the installation
of boards, mirrors
and other
fixtures



PERMANENT MOUNTING APPLICATIONS



DUBL KOTE®

PERMANENT MOUNTING APPLICATIONS



PERMANENT MOUNTING APPLICATIONS





Longest rolls in the industry with 1/8" and 1/4" thickness

Long Rolls, White

3" diameter core

| Part Number | Thickness | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| | in | in | ft | |
| 473650 | 1/32 | 1/4 | 432 | 24 |
| 471350 | 1/32 | 3/8 | 900 | 20 |
| 502375 | 1/32 | 15/32 | 1,050 | 16 |
| 471363 | 1/32 | 1/2 | 1,050 | 16 |
| 471358 | 1/32 | 1/2 | 1,500 | 9 |
| 472880 | 1/32 | 5/8 | 1,050 | 13 |
| 502504 | 1/32 | 23/32 | 1,050 | 11 |
| 476057 | 1/32 | 3/4 | 1,050 | 11 |
| 471360 | 1/32 | 3/4 | 1,500 | 7 |
| 476058 | 1/32 | 1 | 1,050 | 8 |
| 471359 | 1/32 | 1 | 1,500 | 5 |
| 473635 | 1/32 | 1-1/4 | 900 | 6 |
| 501334 | 1/32 | 1-3/4 | 900 | 4 |
| 473648 | 1/32 | 2 | 900 | 3 |
| 473632 | 1/16 | 3/8 | 450 | 32 |
| 471347 | 1/16 | 1/2 | 450 | 24 |
| 471362 | 1/16 | 1/2 | 750 | 10 |
| 471348 | 1/16 | 3/4 | 450 | 16 |
| 471349 | 1/16 | 1 | 450 | 12 |
| 471361 | 1/16 | 1 | 750 | 5 |
| 472877 | 1/8 | 1/2 | 300 | 11 |
| 472879 | 1/8 | 1 | 300 | 5 |
| 472881 | 1/4 | 1 | 100 | 7 |

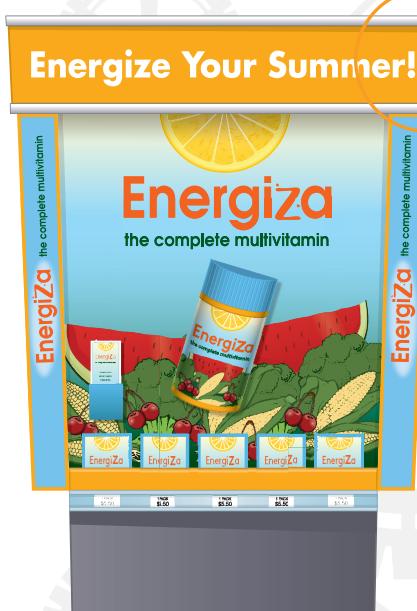

Dubl Kote®

Use long length rolls for in-line taping on extrusions and on strip & spot applications

Dubl Kote® is applied in-line to extrusions used to attach the header framework in this display

DUBL KOTE®

PERMANENT MOUNTING APPLICATIONS

Short Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 501260 | 1/32 | 48 | 108 | 1 |

3" diameter core

Standard Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471400 | 1/32 | 1/4 | 216 | 48 |
| 472221 | 1/32 | 1/4 | 216 | 12 |
| 471397 | 1/32 | 3/8 | 216 | 32 |
| 472225 | 1/32 | 3/8 | 216 | 12 |
| 471394 | 1/32 | 1/2 | 216 | 24 |
| 472223 | 1/32 | 1/2 | 216 | 12 |
| 471395 | 1/32 | 3/4 | 216 | 16 |
| 471399 | 1/32 | 1 | 216 | 12 |
| 473674 | 1/32 | 1-1/4 | 216 | 10 |
| 471401 | 1/32 | 1-1/2 | 216 | 8 |
| 471402 | 1/32 | 2 | 216 | 6 |
| 473681 | 1/32 | 2-1/2 | 216 | 5 |
| 471403 | 1/32 | 3 | 216 | 4 |
| 472874 | 1/32 | 12 | 216 | 1 |
| 473685 | 1/32 | 13-1/2 | 216 | 1 |
| 471406 | 1/16 | 1/4 | 216 | 48 |
| 472222 | 1/16 | 1/4 | 216 | 12 |
| 473671 | 1/16 | 3/8 | 216 | 32 |
| 471396 | 1/16 | 1/2 | 216 | 24 |
| 472224 | 1/16 | 1/2 | 216 | 12 |
| 417407 | 1/16 | 3/4 | 216 | 16 |
| 471408 | 1/16 | 1 | 216 | 12 |
| 471409 | 1/16 | 1-1/2 | 216 | 8 |
| 471410 | 1/16 | 2 | 216 | 6 |
| 471415 | 1/8 | 1/2 | 108 | 24 |
| 471416 | 1/8 | 3/4 | 108 | 16 |
| 471417 | 1/8 | 1 | 108 | 12 |

3" diameter core

Long Rolls, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 473677 | 1/32 | 3/8 | 900 | 20 |
| 471398 | 1/32 | 1/2 | 900 | 16 |
| 500661 | 1/32 | 5/8 | 450 | 16 |
| 471404 | 1/32 | 3/4 | 1,050 | 11 |
| 471405 | 1/32 | 1 | 1,050 | 8 |
| 471412 | 1/16 | 1/2 | 450 | 24 |
| 471413 | 1/16 | 3/4 | 450 | 16 |

3" diameter core

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS

SEMI
PERMANENT
DISPLAYS



CAN'T FIND
YOUR SIZE?

Contact our
tape experts!

PERMANENT MOUNTING APPLICATIONS



DUBL KOTE® ACRYLIC

PERMANENT MOUNTING APPLICATIONS

TEMPORARY
DISPLAYS

PERMANENT
DISPLAYS

SEMI
PERMANENT
DISPLAYS

DUBL KOTE® ACRYLIC

Use on flexible plastics, as acrylic adhesive offers good plasticizer resistance

Specifications

- Adhesive: Acrylic-based permanent on both sides, identified with our black printed liner
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 175°F

Standard Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 472595 | 1/32 | 1/4 | 216 | 12 |
| 472597 | 1/32 | 3/8 | 216 | 12 |
| 472599 | 1/32 | 1/2 | 216 | 12 |
| 472600 | 1/32 | 1/2 | 216 | 24 |
| 472601 | 1/32 | 3/4 | 216 | 16 |
| 472602 | 1/32 | 1 | 216 | 12 |
| 472608 | 1/16 | 1/2 | 216 | 12 |
| 472610 | 1/16 | 3/4 | 216 | 16 |
| 472611 | 1/16 | 1 | 216 | 12 |
| 472613 | 1/16 | 2 | 216 | 6 |
| 472616 | 1/8 | 1/2 | 108 | 24 |

WHERE TO USE DUBL KOTE® ACRYLIC

- Temporary, semi-permanent and permanent displays
- Plastic extrusions
- Wire management raceways
- Signage
- End caps
- Headers
- Textured surface bonding
- Plastic fasteners
- Decorative trim
- Shower enclosures
- Mirror mounting
- Shower splash guard
- Metal to metal bonding
- Wall files
- Air fresheners
- Protective trim



FREE SAMPLES

866 800 0775

DURACO.
PERMANENT MOUNTING APPLICATIONS

DUBL KOTE® ACRYLIC

PERMANENT MOUNTING APPLICATIONS

Long Rolls, White

| Part Number | Thickness | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| | in | in | ft | |
| 472624 | 1/32 | 1/2 | 1,500 | 9 |
| 472632 | 1/16 | 1 | 450 | 12 |

3" diameter core

TEMPORARY DISPLAYS
PERMANENT DISPLAYS

SEMI PERMANENT DISPLAYS

Standard Rolls, Black

| Part Number | Thickness | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| | in | in | ft | |
| 472634 | 1/32 | 1/2 | 216 | 24 |
| 472635 | 1/32 | 3/4 | 216 | 16 |
| 472636 | 1/32 | 1 | 216 | 12 |
| 472637 | 1/16 | 1/2 | 216 | 24 |
| 472639 | 1/16 | 1 | 216 | 12 |

3" diameter core

PERMANENT MOUNTING APPLICATIONS



FAST
SHIPPING



When time is limited,
every second counts.

So, we've extended our
same day shipping hours to better
meet your needs on in-stock products.

DUBL KOTE® LSE

PERMANENT MOUNTING APPLICATIONS



DUBL KOTE® LSE

Ideal for applying to LSE plastics without the added thickness. Offers the ability to be applied automatically or in long lengths.

Specifications

- Adhesive: Rubber-based permanent on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Standard Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 479509 | 1/32 | 1/2 | 216 | 24 |
| 479510 | 1/32 | 1/2 | 1500 | 9 |
| 479511 | 1/32 | 3/4 | 216 | 16 |
| 479512 | 1/32 | 1 | 216 | 12 |
| 479513 | 1/32 | 1 | 1500 | 5 |
| 479514 | 1/16 | 1/2 | 216 | 24 |
| 479515 | 1/16 | 3/4 | 216 | 16 |
| 479516 | 1/16 | 1 | 216 | 12 |



**USE DUBL KOTE® LSE ON
POINT-OF-PURCHASE DISPLAYS
TO RELIABLY ADHERE YOUR
GRAPHICS**



PERMANENT MOUNTING APPLICATIONS

DK FILM®

PERMANENT MOUNTING APPLICATIONS

DK FILM®

Provides the tack of our permanent rubber-based adhesive without the thickness of foam tape

Specifications

- Adhesive: Rubber-based permanent on both sides (not recommended for direct UV exposure. See application notes for more information)
- Thickness: 0.5 mil film, 1.25 mil to 2 mil adhesive on each side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 190°F

Features

- Rubber-based adhesives have good initial tack/quick-stick and are designed to bond to many different types of surfaces
- Pre-cut pieces available for faster assembly of POP displays and signage
- Rolls up to 3,000 feet in length designed to improve efficiencies in automatic applications

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Length | Roll Diameter | Rolls/Carton |
|-------------|--------------------|-----|--------|---------------|--------------|
| | mil | in | | | |
| 473013 | 3.0 | 1/2 | 180 | 5-3/4 | 48 |
| 473014 | 3.0 | 3/4 | 180 | 5-3/4 | 32 |
| 473015 | 3.0 | 1 | 180 | 5-3/4 | 24 |
| 473016 | 3.0 | 2 | 180 | 5-3/4 | 12 |
| 472885 | 4.5 | 1/4 | 180 | 6-5/8 | 64 |
| 471707 | 4.5 | 3/8 | 180 | 6-5/8 | 40 |
| 471710 | 4.5 | 1/2 | 180 | 6-5/8 | 48 |
| 471712 | 4.5 | 3/4 | 180 | 6-5/8 | 32 |
| 471713 | 4.5 | 1 | 180 | 6-5/8 | 24 |
| 471715 | 4.5 | 2 | 180 | 6-5/8 | 12 |
| 471716 | 4.5 | 3 | 180 | 6-5/8 | 8 |
| 471717 | 4.5 | 12 | 180 | 6-5/8 | 4 |

Long Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Length | Roll Diameter | Rolls/Carton |
|-------------|--------------------|-----|--------|---------------|--------------|
| | mil | in | | | |
| 473017 | 3.0 | 1/2 | 1,000 | 10-13/16 | 18 |
| 473021 | 3.0 | 1/2 | 3,000 | 18-3/16 | 12 |
| 473018 | 3.0 | 3/4 | 1,000 | 10-13/16 | 12 |
| 473022 | 3.0 | 3/4 | 3,000 | 18-3/16 | 4 |
| 473019 | 3.0 | 1 | 1,000 | 10-13/16 | 9 |
| 473023 | 3.0 | 1 | 3,000 | 18-3/16 | 6 |
| 473020 | 3.0 | 2 | 1,000 | 10-13/16 | 4 |
| 471708 | 4.5 | 3/8 | 750 | 12-1/8 | 14 |
| 471709 | 4.5 | 1/2 | 1,500 | 17 | 12 |
| 471711 | 4.5 | 3/4 | 1,500 | 17 | 8 |
| 471714 | 4.5 | 1 | 750 | 12-1/8 | 6 |

(more stock sizes continued on next page)

*Roll diameter listed is nominal with a tolerance of +/- 6%.



WHERE TO USE DK FILM®

- Extrusions
- Nameplates
- Packaging and bindery
- Signage
- POP displays
- Corrugated folders/boxes
- Wire raceways
- Plastic fasteners

TIPS

- Use the thinner 3.0 mil adhesive for less demanding, more cost sensitive applications.
- Use the thicker 4.5 mil adhesive for applications that require higher shear strength.

PERMANENT MOUNTING APPLICATIONS



DK FILM®

PERMANENT MOUNTING APPLICATIONS



Spools

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Spools/Carton |
|-------------|---------------------------|-------------|--------------|---------------|
| 475425 | 3.5 | 1/2 | 20,000 | 1 |
| 475426 | 3.5 | 3/4 | 15,000 | 1 |
| 475427 | 3.5 | 1 | 10,000 | 1 |

Laminating Tape, Wide Width Rolls

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|--------------|
| 473154 | 3.0 | 24 | 180 | 2 |
| 471717 | 4.5 | 12 | 180 | 2 |

Pre-Cut Pieces on a Roll

| Part Number | Adhesive + Carrier mil | Width in | Length in | Pieces/Roll |
|-------------|---------------------------|-------------|--------------|-------------|
| 471718 | 4.5 | 1/2 | 1 | 10,000 |
| 471719 | 4.5 | 1/2 | 2 | 10,000 |
| 471720 | 4.5 | 1/2 | 3 | 5,000 |
| 471721 | 4.5 | 1/2 | 4 | 5,000 |
| 471722 | 4.5 | 1/2 | 5 | 3,000 |
| 471723 | 4.5 | 1/2 | 6 | 3,000 |
| 471724 | 4.5 | 1/2 | 7 | 2,000 |
| 471725 | 4.5 | 1/2 | 8 | 2,000 |
| 471726 | 4.5 | 1/2 | 9 | 2,000 |
| 471727 | 4.5 | 1/2 | 10 | 2,000 |
| 471728 | 4.5 | 1/2 | 11 | 2,000 |

(more stock sizes continued on next page)



PERMANENT MOUNTING APPLICATIONS

DK FILM®

PERMANENT MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll

| Part Number | Adhesive + Carrier mil | Width | Length | Pieces/Roll |
|-------------|---------------------------|-------|--------|-------------|
| | | in | in | |
| 471743 | 4.5 | 3/4 | 1 | 10,000 |
| 471744 | 4.5 | 3/4 | 2 | 5,000 |
| 471745 | 4.5 | 3/4 | 3 | 5,000 |
| 471746 | 4.5 | 3/4 | 4 | 2,500 |
| 471747 | 4.5 | 3/4 | 5 | 2,000 |
| 471748 | 4.5 | 3/4 | 6 | 2,000 |
| 471749 | 4.5 | 3/4 | 7 | 2,000 |
| 471750 | 4.5 | 3/4 | 8 | 2,000 |
| 471751 | 4.5 | 3/4 | 9 | 2,000 |
| 478695 | 4.5 | 3/4 | 10 | 3,500 |
| 478696 | 4.5 | 3/4 | 11 | 4,000 |
| 478697 | 4.5 | 3/4 | 12 | 3,500 |
| 478698 | 4.5 | 3/4 | 13 | 4,000 |
| 478699 | 4.5 | 3/4 | 14 | 4,000 |
| 478700 | 4.5 | 3/4 | 15 | 4,000 |
| 478701 | 4.5 | 3/4 | 16 | 4,000 |
| 471768 | 4.5 | 1 | 1 | 10,000 |
| 471769 | 4.5 | 1 | 2 | 6,300 |
| 471770 | 4.5 | 1 | 3 | 4,000 |
| 471771 | 4.5 | 1 | 4 | 2,500 |
| 471772 | 4.5 | 1 | 5 | 2,000 |
| 471773 | 4.5 | 1 | 6 | 2,000 |
| 478692 | 4.5 | 1 | 7 | 3,000 |
| 478693 | 4.5 | 1 | 8 | 2,500 |
| 478694 | 4.5 | 1 | 9 | 2,500 |
| 478681 | 4.5 | 1 | 10 | 2,500 |
| 478682 | 4.5 | 1 | 11 | 3,000 |
| 478683 | 4.5 | 1 | 12 | 2,500 |
| 478684 | 4.5 | 1 | 13 | 2,500 |
| 478685 | 4.5 | 1 | 14 | 3,000 |
| 478686 | 4.5 | 1 | 15 | 3,000 |
| 478687 | 4.5 | 1 | 16 | 3,000 |
| 478688 | 4.5 | 1 | 17 | 3,000 |
| 478689 | 4.5 | 1 | 18 | 3,000 |
| 478690 | 4.5 | 1 | 19 | 2,500 |
| 478691 | 4.5 | 1 | 20 | 2,500 |



Use our
pre-cut pieces
for faster assembly
of POP displays
and signage

PERMANENT MOUNTING APPLICATIONS



DK FILM® ACRYLIC

PERMANENT MOUNTING APPLICATIONS



DK FILM® ACRYLIC

Ideal for demanding indoor and moderate outdoor applications

Specifications

- Adhesive: Acrylic-based permanent on both sides
- Thickness: 0.5 mil film, 1.65 mil adhesive on each side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 275°F

Features

- Good shear strength
- High temperature resistance; good UV and weather resistance
- Good adhesion to flexible plastics
- Our rolls, up to 1,500 feet in length, are designed to improve efficiencies in automatic applications
- Wider widths are perfect for laminating and wide format graphics

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Width | Length | Roll Diameter* | Rolls/Carton |
|-------------|--------------------|-----|-------|--------|----------------|--------------|
| | mil | in | | | | |
| 472523 | 3.8 | 1/2 | 180 | 6-5/8 | 48 | |
| 472524 | 3.8 | 3/4 | 180 | 6-5/8 | 32 | |
| 472525 | 3.8 | 1 | 180 | 6-5/8 | 24 | |

Laminating Tape, Wide Width

3" diameter core

| Part Number | Adhesive + Carrier | | Width | Length | Roll Diameter* | Rolls/Carton |
|-------------|--------------------|----|-------|--------|----------------|--------------|
| | mil | in | | | | |
| 472528 | 3.8 | 12 | 180 | 6-5/8 | 2 | |
| 473162 | 3.8 | 24 | 180 | 6-5/8 | 2 | |
| 473163 | 3.8 | 36 | 180 | 6-5/8 | 1 | |

*Roll diameter listed is nominal with a tolerance of +/- 6%.

WHERE TO USE DK FILM® ACRYLIC

- Extrusions
- Nameplates
- Packaging and bindery
- Signage
- POP displays
- Corrugated folders/boxes
- Wire raceways
- Plastic fasteners

CALL AN EXPERT!

Can't find what you need?
Call us and let one of our
experts help you find the
right product for the job!

866 800 0775



DK FILM® HI-TACK ACRYLIC

PERMANENT MOUNTING APPLICATIONS

DK FILM® HI-TACK ACRYLIC

Performs in the most demanding applications

Specifications

- Adhesive: Acrylic-based permanent on both sides
- Thickness: 0.5 mil film, 1.5 mil adhesive on each side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 275°F

Features

- Good initial tack
- High performing long-term adhesive bond
- Excellent UV resistance
- Good plasticizer resistance



Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|----------------------|--------------|
| | | | | | |
| 473037 | 3.5 | 1/2 | 180 | 5-7/8 | 48 |
| 473038 | 3.5 | 3/4 | 180 | 5-7/8 | 32 |
| 473039 | 3.5 | 1 | 180 | 5-7/8 | 24 |




Laminating Tape, Wide Width

3" diameter core

| Part Number | Adhesive + Carrier mil | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|---------------------------|-------------|--------------|----------------------|--------------|
| | | | | | |
| 473168 | 3.5 | 12 | 180 | 5-7/8 | 2 |
| 473169 | 3.5 | 18 | 180 | 5-7/8 | 2 |
| 473170 | 3.5 | 24 | 180 | 5-7/8 | 2 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.

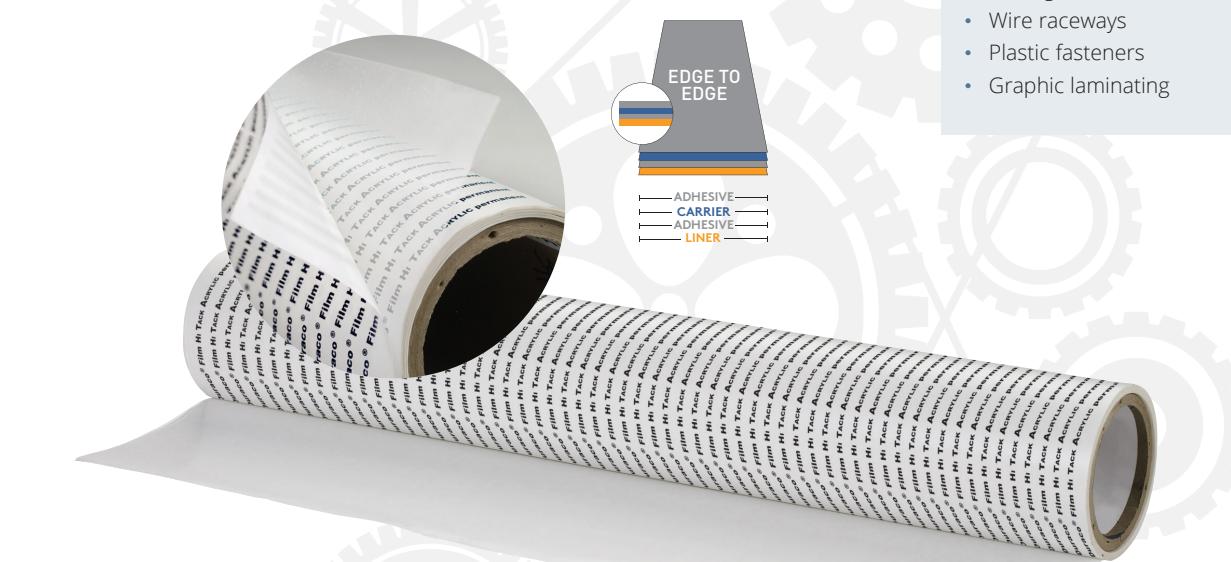

WHERE TO USE DK FILM® HI-TACK ACRYLIC

- Extrusions
- Nameplates
- Packaging and bindery
- Signage
- Wide format graphics
- POP displays
- Corrugated folders/boxes
- Wire raceways
- Plastic fasteners
- Graphic laminating

PERMANENT MOUNTING APPLICATIONS



DK FILM® LSE

PERMANENT MOUNTING APPLICATIONS



DK FILM® LSE

Double-sided film tape with LSE adhesive system

Specifications

- Adhesive: Rubber-based permanent on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to °F

Features

- Extremely aggressive adhesive
- Quick initial bond to LSE plastics
- Faster bond to UV coated board, UV cured inks, and powder coated metals

Standard Rolls

| Part Number | Adhesive + Carrier | | Width | Length | Roll Diameter* | Rolls/Carton |
|-------------|--------------------|---------------|-------|--------|----------------|--------------|
| | mil | in | | | | |
| 479517 | 6.5 | 1/2 | 1500 | 15" | 12 | |
| 479518 | 6.5 | 3/4 | 1500 | 15" | 8 | |
| 479519 | 6.5 | 1 | 750 | 11" | 6 | |
| 479652 | 6.5 | 3/4 on 1 (FL) | 2000 | 17.5" | 5 | |



Edge to Edge

Liner

Adhesive

Carrier

Adhesive

DURACO® HIGH BOND

PERMANENT MOUNTING APPLICATIONS

Duraco High Bond® tapes are high performance acrylic foam core tapes that meet wide application needs.

**PERMANENT
DISPLAYS**



Clear series is perfect for glass or clear acrylic applications

WHERE TO USE DURACO HIGH BOND®

- Appliance: replace mechanical fasteners in consumer and commercial appliances
- Design: seamless attachment of decorative panels
- Electronics: LCD displays, hand-held electronic assembly, data enclosures
- Event Promotion: seamless banner assembly and sign installation
- HVAC: replace mechanical fasteners and welding in heating and air conditioning unit assembly
- POP Displays: clean design without unsightly mechanical fasteners
- Sign Manufacturing: interior and exterior sign mounting

DURACO HIGH BOND®

Permanent bond

Features

- Wide Service Temperature Range: -20°F to 300°F
- Aesthetically pleasing — create nearly invisible bond lines without unsightly welds, rivets and screws
- Tamper resistant – permanent bond
- Great for bonding dissimilar metals
- Expanded clear series is perfect for bonding clear acrylic and glass products
- Excellent resistance to temperature cycles
- Unique shock absorption and vibration damping properties
- Good conformability/softness for irregular or curved surfaces

DURACO HIGH BOND® CLEAR

Rolls

3" diameter core

| Part Number | Series | Thickness | Width | Length | Service Temp. |
|-------------|--------|-----------|-------|--------|---------------|
| | | in | in | ft | °F |
| 472939 | 23 | .020 | 1/2 | 216 | -20 to 300 |
| 472940 | 23 | .020 | 3/4 | 216 | -20 to 300 |
| 472941 | 23 | .020 | 1 | 216 | -20 to 300 |
| 472942 | 34 | .040 | 1/2 | 108 | -20 to 300 |
| 472943 | 34 | .040 | 3/4 | 108 | -20 to 300 |
| 472944 | 34 | .040 | 1 | 108 | -20 to 300 |
| 475721 | 35 | .060 | 1/2 | 108 | -20 to 300 |
| 475722 | 35 | .060 | 3/4 | 108 | -20 to 300 |
| 475723 | 35 | .060 | 1 | 108 | -20 to 300 |
| 475724 | 07 | .080 | 1/2 | 54 | -20 to 300 |
| 475725 | 07 | .080 | 3/4 | 54 | -20 to 300 |
| 475726 | 07 | .080 | 1 | 54 | -20 to 300 |

Pre-cut Pieces on a Roll

| Part Number | Series | Thickness | Width | Length | Service Temp. | Pieces/Roll |
|-------------|--------|-----------|-------|--------|---------------|-------------|
| | | in | in | in | °F | |
| 475730 | 23 | .020 | 1 | 1 | -20 to 300 | 2,500 |
| 475731 | 23 | .020 | 1 | 2 | -20 to 300 | 2,500 |
| 475732 | 23 | .020 | 1 | 3 | -20 to 300 | 2,000 |
| 475625 | 23 | .020 | 1 | 4 | -20 to 300 | 2,000 |
| 475733 | 34 | .040 | 1 | 1 | -20 to 300 | 1,250 |
| 475734 | 34 | .040 | 1 | 2 | -20 to 300 | 1,250 |
| 475735 | 34 | .040 | 1 | 3 | -20 to 300 | 1,000 |
| 475658 | 34 | .040 | 1 | 4 | -20 to 300 | 1,000 |

Adhesive promoter: The component substrate determines whether an adhesive promoter should be used. Use of an adhesive promoter can allow a quicker initial and ultimate bond.

PERMANENT MOUNTING APPLICATIONS



DURACO® HIGH BOND

PERMANENT MOUNTING APPLICATIONS



PERMANENT MOUNTING APPLICATIONS

DURACO HIGH BOND® WHITE

Rolls

3" diameter core

PERMANENT
DISPLAYS

| Part Number | Series | Thickness | Width | Length | Service Temp. |
|-------------|--------|-----------|-------|--------|---------------|
| | | in | in | ft | °F |
| 475706 | 24 | .010 | 1/2 | 432 | -20 to 240 |
| 475707 | 24 | .010 | 3/4 | 432 | -20 to 240 |
| 475708 | 24 | .010 | 1 | 432 | -20 to 240 |
| 472954 | 56 | .015 | 1/2 | 108 | -20 to 240 |
| 472955 | 56 | .015 | 3/4 | 108 | -20 to 240 |
| 472956 | 56 | .015 | 1 | 108 | -20 to 240 |
| 472957 | 72 | .025 | 1/2 | 108 | -20 to 240 |
| 472958 | 72 | .025 | 3/4 | 108 | -20 to 240 |
| 472959 | 72 | .025 | 1 | 108 | -20 to 240 |
| 472948 | 40 | .045 | 1/2 | 108 | -20 to 240 |
| 472949 | 40 | .045 | 3/4 | 108 | -20 to 240 |
| 472950 | 40 | .045 | 1 | 108 | -20 to 240 |
| 475709 | 02 | .062 | 1/2 | 108 | -20 to 240 |
| 475710 | 02 | .062 | 3/4 | 108 | -20 to 240 |
| 475711 | 02 | .062 | 1 | 108 | -20 to 240 |
| 475712 | 04 | .080 | 1/2 | 108 | -20 to 240 |
| 475713 | 04 | .080 | 3/4 | 108 | -20 to 240 |
| 475714 | 04 | .080 | 1 | 108 | -20 to 240 |
| 475715 | 51 | .120 | 1/2 | 39 | -20 to 300 |
| 475716 | 51 | .120 | 3/4 | 39 | -20 to 300 |
| 475717 | 51 | .120 | 1 | 39 | -20 to 300 |



Pre-cut Pieces on a Roll

| Part Number | Series | Thickness | Width | Length | Service Temp. | Pieces/Roll |
|-------------|--------|-----------|-------|--------|---------------|-------------|
| | | in | in | in | °F | |
| 475740 | 40 | .045 | 1 | 1 | -20 to 240 | 1,250 |
| 475741 | 40 | .045 | 1 | 2 | -20 to 240 | 1,250 |
| 475742 | 40 | .045 | 1 | 3 | -20 to 240 | 1,000 |
| 475743 | 40 | .045 | 1 | 4 | -20 to 240 | 1,000 |

DURACO® HIGH BOND PERMANENT MOUNTING APPLICATIONS

PERMANENT
DISPLAYS



DURACO HIGH BOND® GRAY

Rolls

3" diameter core

| Part Number | Series | Thickness | Width | Length | Service Temp. |
|-------------|--------|-----------|-------|--------|---------------|
| | | in | in | ft | °F |
| 472951 | 21 | .015 | 1/2 | 108 | -20 to 300 |
| 472952 | 21 | .015 | 3/4 | 108 | -20 to 300 |
| 472953 | 21 | .015 | 1 | 108 | -20 to 300 |
| 475727 | 31 | .025 | 1/2 | 216 | -20 to 300 |
| 475728 | 31 | .025 | 3/4 | 216 | -20 to 300 |
| 475729 | 31 | .025 | 1 | 216 | -20 to 300 |
| 472945 | 14 | .045 | 1/2 | 108 | -20 to 240 |
| 472946 | 14 | .045 | 3/4 | 108 | -20 to 240 |
| 472947 | 14 | .045 | 1 | 108 | -20 to 240 |
| 475703 | 10 | .062 | 1/2 | 108 | -20 to 300 |
| 475704 | 10 | .062 | 3/4 | 108 | -20 to 300 |
| 475705 | 10 | .062 | 1 | 108 | -20 to 300 |

Pre-cut Pieces on a Roll

| Part Number | Series | Thickness | Width | Length | Service Temp. | Pieces/Roll |
|-------------|--------|-----------|-------|--------|---------------|-------------|
| | | in | in | in | °F | |
| 475736 | 14 | .045 | 1 | 1 | -20 to 240 | 1,250 |
| 475737 | 14 | .045 | 1 | 2 | -20 to 240 | 1,250 |
| 475738 | 14 | .045 | 1 | 3 | -20 to 240 | 1,000 |
| 475739 | 14 | .045 | 1 | 4 | -20 to 240 | 1,000 |

DURACO HIGH BOND® BLACK

Rolls, General Purpose

3" diameter core

| Part Number | Series | Thickness | Width | Length | Service Temp. |
|-------------|--------|-----------|-------|--------|---------------|
| | | in | in | ft | °F |
| 472960 | 33 | .025 | 1/2 | 108 | -20 to 200 |
| 472961 | 33 | .025 | 3/4 | 108 | -20 to 200 |
| 472962 | 33 | .025 | 1 | 108 | -20 to 200 |
| 472963 | 26 | .045 | 1/2 | 108 | -20 to 200 |
| 472964 | 26 | .045 | 3/4 | 108 | -20 to 200 |
| 472965 | 26 | .045 | 1 | 108 | -20 to 200 |

Rolls, Conformable for Powder Coat

3" diameter core

| Part Number | Series | Thickness | Width | Length | Service Temp. |
|-------------|--------|-----------|-------|--------|---------------|
| | | in | in | ft | °F |
| 475697 | 09 | .025 | 1/2 | 216 | -20 to 200 |
| 475698 | 09 | .025 | 3/4 | 216 | -20 to 200 |
| 475699 | 09 | .025 | 1 | 216 | -20 to 200 |
| 475700 | 16 | .045 | 1/2 | 108 | -20 to 200 |
| 475701 | 16 | .045 | 3/4 | 108 | -20 to 200 |
| 475702 | 16 | .045 | 1 | 108 | -20 to 200 |

Adhesive promoter: The component substrate determines whether an adhesive promoter should be used. Use of an adhesive promoter can allow a quicker initial and ultimate bond.

Products should be tested in the application before use.

PERMANENT MOUNTING APPLICATIONS



DURACO® GOLD

PERMANENT MOUNTING APPLICATIONS



DURACO® GOLD 9970

White PVC film carrier double-sided tape with excellent adhesion properties

Specifications

- Adhesive: Acrylic-based permanent on both sides
- Backing: PVC film
- Thickness: 9 mil
- Application Temperature: 65°F to 100°
- Service Temperature: 14°F to 176°F

Features

- The extra thickness of this film makes Duraco® Gold a great choice for textured or irregular surfaces

Standard Rolls

3" diameter core

| Part Number | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|-------------|--------------|----------------------|--------------|
| 476017 | 3/8 | 180 | 6-5/8 | 48 |
| 476018 | 1/2 | 180 | 6-5/8 | 36 |
| 476019 | 3/4 | 180 | 6-5/8 | 24 |
| 476020 | 1 | 180 | 6-5/8 | 18 |
| 476021 | 2 | 180 | 6-5/8 | 9 |

Long Rolls

3" diameter core

| Part Number | Width in | Length ft | Roll Diameter* in | Rolls/Carton |
|-------------|-------------|--------------|----------------------|--------------|
| 476023 | 1/2 | 750 | 12-1/4 | 12 |
| 476024 | 3/4 | 750 | 12-1/4 | 8 |
| 476025 | 1 | 750 | 12-1/4 | 6 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.

WHERE TO USE DURACO® GOLD 9970

- General bonding
- Nameplates
- Decorative trim
- Signs
- POP displays
- Irregular surfaces

Duraco® Gold products are conformable and thinner than foam

NOSKID FOAM

PERMANENT MOUNTING APPLICATIONS

NoSKID FOAM

Non-skid foam coated on one side with a high tack permanent adhesive

Specifications

- Adhesive: Rubber-based permanent (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 150°F
- Service Temperature: -20°F to 175°F

Features


- Eliminates slippage

Diameters in a Pad

| Part Number | Thickness | Diameter | Diameters/ Pad | Diameters/ Carton |
|-------------|-----------|----------|-------------------|----------------------|
| | in | in | | |
| 471802 | 1/16 | 1/2 | 4 | 10,000 |
| 471805 | 1/8 | 1/2 | 4 | 5,000 |

Diameters on a Roll

| Part Number | Thickness | Diameter | Diameters/ Roll |
|-------------|-----------|----------|--------------------|
| | in | in | |
| 471801 | 1/16 | 1/2 | 1,000 |
| 471800 | 1/16 | 1/2 | 25,000 |
| 471799 | 1/16 | 1/2 | 10,000 |
| 472888 | 1/16 | 3/4 | 7,500 |
| 472890 | 1/16 | 1 | 5,000 |
| 471804 | 1/8 | 1/2 | 1,000 |
| 471803 | 1/8 | 1/2 | 10,000 |
| 472889 | 1/8 | 3/4 | 6,000 |
| 472891 | 1/8 | 1 | 4,000 |

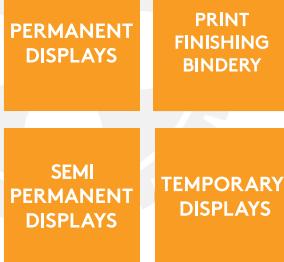


PERMANENT MOUNTING APPLICATIONS



WHERE TO USE NoSKID FOAM

- Counter mats
- Mouse pads
- POP displays
- Small appliances
- Office products
- Cushioning
- Furniture



NoSKID Foam is used as the backing for this counter mat

NOSKID FOAM

PERMANENT MOUNTING APPLICATIONS



Pre-Cut Pieces on a Roll

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 471808 | 1/16 | 3/4 | 1 | 10,000 |
| 471809 | 1/16 | 3/4 | 3 | 2,500 |
| 471810 | 1/16 | 1 | 1 | 10,000 |
| 471811 | 1/16 | 1 | 3 | 4,000 |
| 471812 | 1/8 | 1/2 | 1 | 10,000 |
| 471816 | 1/8 | 1 | 1 | 10,000 |
| 471817 | 1/8 | 1 | 3 | 2,000 |

Pre-Cut Pieces in a Pad

| Part Number | Thickness | Width | Length | Pieces/Pad | Pieces/Carton |
|-------------|-----------|-------|--------|------------|---------------|
| | in | in | in | | |
| 471822 | 1/16 | 1 | 1 | 10 | 8,500 |
| 471823 | 1/16 | 1 | 3 | 10 | 2,500 |
| 471824 | 1/8 | 1/2 | 1 | 10 | 8,500 |
| 471828 | 1/8 | 1 | 1 | 10 | 7,500 |
| 471829 | 1/8 | 1 | 3 | 10 | 2,500 |

DURACO.

PERMANENT MOUNTING APPLICATIONS



Always start with a
CLEAN SURFACE

Dirty, dusty and oily surfaces
will stop your tape from sticking




NOSKID FOAM

PERMANENT MOUNTING APPLICATIONS

Continuous Rolls

| Part Number | Thickness | Width | Length | Rolls/Carton |
|-------------|-----------|-------|--------|--------------|
| | in | in | ft | |
| 471793 | 1/16 | 1/2 | 50 | 30 |
| 471794 | 1/16 | 1 | 50 | 15 |
| 471795 | 1/16 | 19 | 50 | 4 |
| 471796 | 1/8 | 1/2 | 50 | 20 |
| 471797 | 1/8 | 1 | 50 | 10 |
| 471798 | 1/8 | 19 | 50 | 4 |

3" diameter core

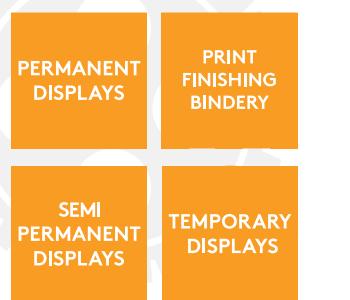

Sheets

| Part Number | Thickness | Width | Length | Sheets/Carton |
|-------------|-----------|-------|--------|---------------|
| | in | in | in | |
| 472430 | 1/8 | 19 | 29 | 40 |





IN STOCK



866 800 0775

TIPS

- Use NoSkid Foam rolls to line store or display shelves to keep product from slipping.
- Use NoSkid Foam sheets to laminate your printed plastic sheets in POP counter mat production.

PERMANENT MOUNTING APPLICATIONS




4481

PERMANENT MOUNTING APPLICATIONS

Duraco's Film Tape is a double-sided tape with a film carrier and an extended liner for easy removal.

WHERE TO USE 4481

- Corrugated overnight boxes
- POP assembly

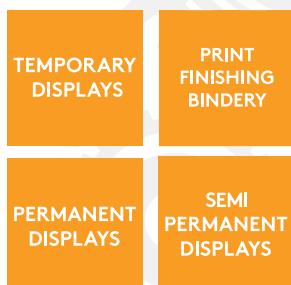

4481 FINGER LIFT

General purpose

Specifications

- Adhesive: Hot melt rubber-based permanent
- Application Temperature: 50°F to 122°F
- Service Temperature: 0°F to 160°F
- Classifications: FDA Regulation 175.105 for indirect food contact

Features

- Double-sided PET film tape coated both sides with an aggressive hot-melt rubber-based permanent adhesive
- Ideal for permanently bonding paper and card stock



Short Rolls

3" diameter core


| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 492066 | 5.9 | 2.8 | 1/2 | 1/4 | 216 | 6 |
| 492069 | 5.9 | 2.8 | 3/4 | 1/2 | 216 | 6 |
| 492072 | 5.9 | 2.8 | 1 | 3/4 | 216 | 6 |

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|---------------------------|--------------|-------------------|----------------------|--------------|----------------------|
| 492067 | 5.9 | 2.8 | 1/2 | 1/4 | 1,080 | 12-1/2 |
| 492068 | 5.9 | 2.8 | 1/2 | 1/4 | 1,620 | 15-1/2 |
| 492070 | 5.9 | 2.8 | 3/4 | 1/2 | 1,080 | 12-1/2 |
| 492071 | 5.9 | 2.8 | 3/4 | 1/2 | 1,620 | 15-1/2 |
| 492073 | 5.9 | 2.8 | 1 | 3/4 | 1,080 | 12-1/2 |
| 492074 | 5.9 | 2.8 | 1 | 3/4 | 1,620 | 15-1/2 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.



4581

PERMANENT MOUNTING APPLICATIONS

4581 FINGER LIFT and 4581 EDGE TO EDGE

4581 Finger Lift is a double-sided tape with a film carrier with an extended liner for easy removal

Specifications

- Adhesive: Rubber-based permanent on both sides of PET film carrier
- Application Temperature: 65°F to 100°F
- Service Temperature: 0°F to 158°F
- Classifications: FDA Regulation 175.105 for indirect food contact


Features

- High shear properties
- High peel strength
- Minimal adhesive residue
- Aggressive quick stick
- Printed release liner
- Available in long length rolls for automatic application
- Efficient alternative to glue lines

Finger Lift Rolls

| Part Number | Liner Width in | Adhesive Width in | Roll Length ft | Rolls/Carton |
|-------------|-------------------|----------------------|-------------------|--------------|
| 479092 | 1/2 | 1/4 | 216 | 40 |
| 479093 | 3/4 | 1/2 | 216 | 24 |
| 479094 | 1 | 3/4 | 216 | 20 |
| 479095 | 1/2 | 1/4 | 1620 | 10 |
| 479096 | 3/4 | 1/2 | 1620 | 7 |
| 479097 | 1 | 3/4 | 1620 | 5 |

3" diameter core

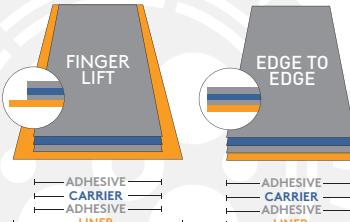

Edge to Edge Rolls

3" diameter core

| Part Number | Liner Width in | Adhesive Width in | Roll Length ft | Rolls/Carton |
|-------------|-------------------|----------------------|-------------------|--------------|
| 479098 | 1/2 | 1/2 | 1500 | 12 |
| 479099 | 3/4 | 3/4 | 1500 | 8 |
| 479100 | 1 | 1 | 750 | 6 |



WHERE TO USE 4581 FINGER LIFT and 4581 EDGE TO EDGE

- Point of Purchase displays
- Transit packaging
- Folding cartons
- Posters / Signage
- Overnight mailing envelopes

PERMANENT MOUNTING APPLICATIONS



4582

PERMANENT MOUNTING APPLICATIONS



4582 FINGER LIFT and 4582 DRY EDGE

4582 is a permanent tape with a polyester carrier and an adhesive system offering a high coat weight on the exposed side and very high coat weight on the liner side. The liner is a two-side silicone release paper for easy removal.

Specifications

- Adhesive: High tack rubber-based adhesive
- Application Temperature: 65°F to 100°F
- Service Temperature: 0°F to 158°F
- Classifications: FDA Regulation 175.105 for indirect food contact

Features

- Aggressive quick stick, high tack, and high peel adhesive system
- "Finger Lift" design allows for quick and easy liner removal
- Can be modified in long-length rolls for automated applications
- Offers a personalized message or graphic on its liner

Finger Lift Rolls

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|------------------------|-----------|----------------|-------------------|-----------|-------------------|
| 504669 | 5.5 | 2.2 | 1" | 3/4" (FL) | 1620 | 14.2" |

Dry Edge Rolls

| Part Number | Adhesive + Carrier mil | Liner mil | Liner Width in | Adhesive Width in | Length ft | Roll Diameter* in |
|-------------|------------------------|-----------|----------------|-------------------|-----------|-------------------|
| 504670 | 5.5 | 2.2 | 1-1/4" | 1" (DE) | 2000 | 15.7" |
| 504671 | 5.5 | 2.2 | 1-3/4" | 1-1/2" (DE) | 2000 | 15.7" |

CUSTOMIZE

- Personalized messaging or graphic on liner
- Liner overhang capabilities
- Converting and testing capabilities



WHERE TO USE 4582 FINGER LIFT and 4582 DRY EDGE

- Bags and pouches
- Corrugated overnight mailers
- E-commerce & Direct-to-Consumers boxes

DSTF FINGER LIFT

PERMANENT MOUNTING APPLICATIONS

Duraco's Finger Lift Tissue Tape is a hand-tearable, tissue supported double-sided tape. The Finger Lift liner has a dry edge on both sides, making liner removal fast and easy.

PRINT
FINISHING
BINDERY

SEMI
PERMANENT
DISPLAYS




DSTF FINGER LIFT

General purpose

Specifications

- Adhesive: Hot melt rubber-based permanent
- Application Temperature: 35°F to 122°F
- Service Temperature: 0°F to 160°F
- Classifications: FDA Regulation 175.105 for indirect food contact



Features

- The industry standard general purpose product

Short Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Liner Width | Adhesive Width | Length | Roll Diameter* |
|-------------|--------------------|-----|-------------|----------------|--------|----------------|
| | mil | mil | | | | |
| 492000 | 3.3 | 2.2 | 1/2 | 1/4 | 108 | 3-1/2 |
| 491537 | 3.3 | 2.2 | 1/2 | 1/4 | 216 | 5 |
| 492003 | 3.3 | 2.2 | 3/4 | 1/2 | 216 | 5 |
| 492006 | 3.3 | 2.2 | 1 | 3/4 | 216 | 5 |

Standard Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Liner Width | Adhesive Width | Length | Roll Diameter* |
|-------------|--------------------|-----|-------------|----------------|--------|----------------|
| | mil | mil | | | | |
| 491535 | 3.3 | 2.2 | 1/2 | 1/4 | 1,300 | 11-1/4 |
| 491536 | 3.3 | 2.2 | 1/2 | 1/4 | 2,000 | 13-3/4 |
| 491517 | 3.3 | 2.2 | 3/4 | 1/2 | 1,300 | 11-1/4 |
| 491518 | 3.3 | 2.2 | 3/4 | 1/2 | 2,000 | 13-3/4 |
| 492007 | 3.3 | 2.2 | 1 | 3/4 | 1,300 | 11-1/4 |
| 492008 | 3.3 | 2.2 | 1 | 3/4 | 2,000 | 13-3/4 |
| 492012 | 3.3 | 2.2 | 1-1/2 | 1-3/16 | 1,300 | 11-1/4 |
| 491532 | 3.3 | 2.2 | 1-1/2 | 1-3/16 | 2,000 | 13-3/4 |
| 491534 | 3.3 | 2.2 | 2 | 1-5/8 | 2,000 | 13-3/4 |

Long Rolls

3" diameter core

| Part Number | Adhesive + Carrier | | Liner Width | Adhesive Width | Length | Roll Diameter* |
|-------------|--------------------|-----|-------------|----------------|--------|----------------|
| | mil | mil | | | | |
| 492001 | 3.3 | 2.2 | 1/2 | 1/4 | 3,000 | 16-3/4 |
| 492004 | 3.3 | 2.2 | 3/4 | 1/2 | 3,000 | 16-3/4 |
| 492009 | 3.3 | 2.2 | 1 | 3/4 | 3,000 | 16-3/4 |

*Roll diameter listed is nominal with a tolerance of +/- 6%.

PERMANENT MOUNTING APPLICATIONS



WHERE TO USE DSTF

- Posters
- Lightweight POP
- Continuous stationery
- Envelopes
- Studio/commercial artwork

PRESSURE SENSITIVE LABELS

PERMANENT MOUNTING APPLICATIONS

OLTXV094

Adhesive

A 3.75 mil clear polyolefin that can be used an over laminate for floor graphics. The slip-resistant film is UL-410 certified. The adhesive is a solvent permanent with great durability. The liner is a 1.2 mil clear PET.

PERMANENT
DISPLAYS

APPLICATIONS

- Floor graphics



PERMANENT RETAIL APPLICATIONS

CALL AN EXPERT!

Can't find what you need?
Call us and let one of our
experts help you find the
right product for the job!



630 879 9388

REMO ONE®

REMOVABLE MOUNTING APPLICATIONS

REMO ONE®

Removable foam tape with aggressive permanent adhesive on one side and removable adhesive on the other

Specifications


- Adhesive: Permanent rubber-based on one side, removable adhesive on mounting side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- 1/2 lb. per sq. in. of tape (conditions and variables in applications can produce different stresses and affect holding power)
- Intended for one-time use on hard, non-delaminating surfaces



Pre-Cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 473847 | 1/32 | 1/2 | 1/2 | 10,000 |
| 470797 | 1/32 | 1/2 | 1 | 10,000 |
| 473863 | 1/32 | 1/2 | 1-1/2 | 10,000 |
| 470798 | 1/32 | 1/2 | 2 | 10,000 |
| 470799 | 1/32 | 1/2 | 3 | 5,000 |
| 470800 | 1/32 | 1/2 | 4 | 5,000 |
| 470801 | 1/32 | 1/2 | 5 | 3,000 |
| 472892 | 1/32 | 1/2 | 6 | 3,000 |
| 472894 | 1/32 | 1/2 | 8 | 2,500 |
| 473855 | 1/32 | 3/4 | 3/4 | 10,000 |
| 470803 | 1/32 | 3/4 | 1 | 10,000 |
| 470804 | 1/32 | 3/4 | 2 | 5,000 |
| 470805 | 1/32 | 3/4 | 3 | 5,000 |
| 470806 | 1/32 | 3/4 | 4 | 2,500 |

(more 1/32" sizes continued on next page)

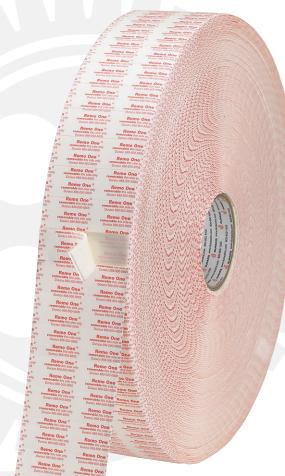


REMOVABLE MOUNTING APPLICATIONS



WHERE TO USE REMO ONE®

- Promotional and temporary signage
- Temporary and permanent displays
- Single use promotional graphics
- Wobblers and shelf talkers



REMOVES
CLEANLY.
NO RESIDUE.




REMO ONE®

REMOVABLE MOUNTING APPLICATIONS

REMO ONE® MOST POPULAR

Pre-Cut Pieces on a Roll, White

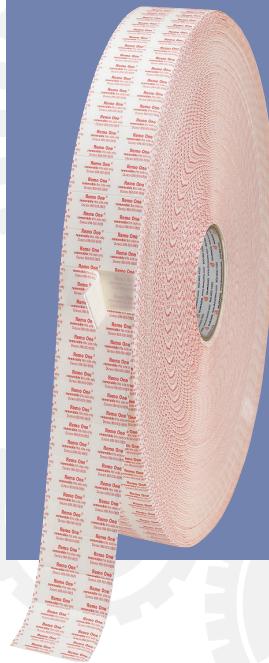

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470754 | 1/32 | 1 | 1 | 6,000 |
| 470748 | 1/32 | 1 | 2 | 6,000 |
| 470755 | 1/32 | 1 | 3 | 2,500 |
| 470809 | 1/32 | 1 | 4 | 2,500 |
| 470750 | 1/16 | 1 | 2 | 5,000 |
| 470751 | 1/16 | 1 | 3 | 2,500 |
| 470756 | 1/16 | 1 | 4 | 2,000 |
| 472912 | 1/16 | 1 | 6 | 2,000 |

Pre-Cut Pieces on a Roll, White



| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470754 | 1/32 | 1 | 1 | 6,000 |
| 470748 | 1/32 | 1 | 2 | 6,000 |
| 470755 | 1/32 | 1 | 3 | 2,500 |
| 470809 | 1/32 | 1 | 4 | 2,500 |
| 470810 | 1/32 | 1 | 5 | 2,000 |
| 472900 | 1/32 | 1 | 6 | 2,000 |
| 478714 | 1/32 | 1 | 7 | 2,500 |
| 478715 | 1/32 | 1 | 8 | 2,500 |
| 478713 | 1/32 | 1 | 10 | 2,500 |
| 473778 | 1/16 | 1/2 | 1/2 | 10,000 |
| 470830 | 1/16 | 1/2 | 1 | 10,000 |
| 470831 | 1/16 | 1/2 | 2 | 10,000 |
| 470832 | 1/16 | 1/2 | 3 | 5,000 |
| 470833 | 1/16 | 1/2 | 4 | 5,000 |
| 470834 | 1/16 | 1/2 | 5 | 3,000 |
| 472904 | 1/16 | 1/2 | 6 | 3,000 |
| 470835 | 1/16 | 1/2 | 10 | 2,000 |

(more 1/16" sizes continued on next page)

REMO ONE®

REMOVABLE MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|--------------|----------|-----------|-------------|
| 470838 | 1/16 | 3/4 | 3 | 2,500 |
| 470749 | 1/16 | 1 | 1 | 5,000 |
| 473862 | 1/16 | 1 | 1-1/2 | 7,500 |
| 470750 | 1/16 | 1 | 2 | 5,000 |
| 470751 | 1/16 | 1 | 3 | 2,500 |
| 470756 | 1/16 | 1 | 4 | 2,000 |
| 470842 | 1/16 | 1 | 5 | 2,000 |
| 472912 | 1/16 | 1 | 6 | 2,000 |
| 478712 | 1/16 | 1 | 8 | 2,000 |
| 470863 | 1/8 | 1/2 | 2 | 7,500 |
| 470757 | 1/8 | 1 | 1 | 5,000 |
| 470752 | 1/8 | 1 | 2 | 2,500 |
| 470753 | 1/8 | 1 | 3 | 2,000 |
| 470872 | 1/8 | 1 | 4 | 2,000 |
| 470873 | 1/8 | 1 | 5 | 1,500 |
| 472924 | 1/8 | 1 | 6 | 1,500 |
| 475844 | 1/4 | 1/2 | 1 | 7,500 |
| 472928 | 1/4 | 1 | 1 | 5,000 |
| 475502 | 1/4 | 1 | 2 | 2,300 |
| 502131 | 1/4 | 1 | 3 | 1,000 |

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

REMOVABLE
1 SIDE


SEMI
PERMANENT
DISPLAYS



REMOVABLE MOUNTING APPLICATIONS



Foam tapes allow for greater surface contact on irregular surfaces. Firm, even pressure improves the bond.

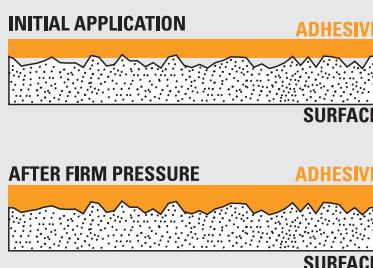

REMO ONE®

REMOVABLE MOUNTING APPLICATIONS



Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|--------------|----------|-----------|------------|---------------|
| 470812 | 1/32 | 1/2 | 1 | 10 | 7,500 |
| 470813 | 1/32 | 1/2 | 2 | 10 | 4,000 |
| 470814 | 1/32 | 1/2 | 3 | 10 | 2,500 |
| 470815 | 1/32 | 1/2 | 4 | 10 | 2,000 |
| 470816 | 1/32 | 1/2 | 5 | 10 | 1,500 |
| 470820 | 1/32 | 3/4 | 3 | 10 | 1,750 |
| 470824 | 1/32 | 1 | 1 | 10 | 4,000 |
| 470825 | 1/32 | 1 | 2 | 10 | 2,000 |
| 470826 | 1/32 | 1 | 3 | 10 | 1,250 |
| 470827 | 1/32 | 1 | 4 | 10 | 1,000 |
| 470828 | 1/32 | 1 | 5 | 5 | 750 |
| 470829 | 1/32 | 1 | 10 | 2 | 400 |
| 470844 | 1/16 | 1/2 | 1 | 10 | 7,500 |
| 470856 | 1/16 | 1 | 1 | 10 | 4,000 |
| 470857 | 1/16 | 1 | 2 | 10 | 2,000 |
| 470858 | 1/16 | 1 | 3 | 10 | 1,250 |
| 470859 | 1/16 | 1 | 4 | 10 | 1,000 |
| 470861 | 1/16 | 1 | 10 | 2 | 400 |
| 470884 | 1/8 | 1 | 1 | 10 | 3,000 |
| 470886 | 1/8 | 1 | 3 | 10 | 1,000 |
| 470887 | 1/8 | 1 | 4 | 10 | 750 |

Pads are great to include in kits with all kinds of temporary signs

IT'S SIMPLE. JUST SAMPLE!

If you're not sure which tape will work best, you can request **FREE SAMPLES** to ensure proper fit and function.

CALL US NOW!

866 800 0775



REMO ONE®

REMOVABLE MOUNTING APPLICATIONS

Short Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471444 | 1/32 | 1/2 | 30 | 72 |
| 471445 | 1/32 | 3/4 | 30 | 45 |
| 471446 | 1/32 | 1 | 30 | 36 |
| 471447 | 1/16 | 1/2 | 30 | 40 |
| 471449 | 1/16 | 1 | 30 | 20 |

1.5" diameter core

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

REMOVABLE
1 SIDE

Standard Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471435 | 1/32 | 1/2 | 216 | 24 |
| 472226 | 1/32 | 1/2 | 216 | 12 |
| 471439 | 1/32 | 3/4 | 216 | 16 |
| 471436 | 1/32 | 1 | 216 | 12 |
| 471437 | 1/16 | 1/2 | 216 | 24 |
| 471440 | 1/16 | 3/4 | 216 | 16 |
| 471438 | 1/16 | 1 | 216 | 12 |
| 471441 | 1/8 | 1/2 | 108 | 24 |
| 471442 | 1/8 | 3/4 | 108 | 16 |
| 471443 | 1/8 | 1 | 108 | 12 |

3" diameter core

REMOVABLE MOUNTING APPLICATIONS



Long Rolls, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 472883 | 1/32 | 1/2 | 900 | 16 |
| 472884 | 1/16 | 1/2 | 450 | 24 |

3" diameter core

Remo One® used on price channels allows removal without adhesive residue



REMO ONE®


REMOVABLE MOUNTING APPLICATIONS



Standard Roll, Black

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471453 | 1/32 | 1/2 | 216 | 12 |
| 471454 | 1/32 | 1 | 216 | 12 |
| 471455 | 1/16 | 1/2 | 216 | 12 |
| 471456 | 1/16 | 1 | 216 | 12 |
| 471457 | 1/8 | 1/2 | 108 | 12 |
| 471458 | 1/8 | 1 | 108 | 12 |

Diameters on a Roll, White

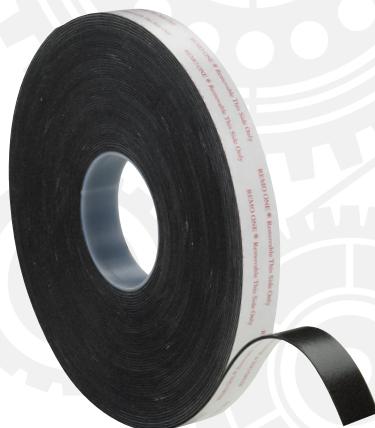

| Part Number | Thickness in | Diameter in | Pieces/Roll |
|-------------|-----------------|----------------|-------------|
| 502457 | 1/32 | 1/2 | 5,000 |
| 502445 | 1/32 | 3/4 | 4,000 |
| 475837 | 1/32 | 1 | 3,000 |
| 502452 | 1/16 | 1/2 | 5,000 |
| 475839 | 1/16 | 1 | 3,000 |



Die cut
diameters
conform to
your shape!

REMO ONE®

REMOVABLE MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470952 | 1/32 | 1 | 3 | 2,500 |
| 470976 | 1/16 | 1/2 | 3 | 5,000 |
| 470986 | 1/16 | 1 | 1 | 5,000 |
| 470988 | 1/16 | 1 | 3 | 2,500 |
| 471020 | 1/8 | 1 | 1 | 6,500 |
| 471022 | 1/8 | 1 | 3 | 2,000 |

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

SEMI
PERMANENT
DISPLAYS

REMOVABLE
1 SIDE



TIP

Remo One® eliminates the retailer's concern about tape residue.

NEED A CLEAR FOAM TAPE?

Check out our
REMO TWO® CLEAR



REMOVABLE MOUNTING APPLICATIONS

 DURACO

REMO ONE® PLUS

REMOVABLE MOUNTING APPLICATIONS



REMO ONE® PLUS

Duraco's Remo One Plus is a double-sided adhesive foam tape that is removable one side and permanent on the other. Removes from hard non-delaminating surfaces such as wood, plastic and glass while offering four times the strength of standard removable tape.

Specifications

- Adhesive: Rubber-based on both sides; one side permanent, one side removable
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F

Features

- Four times the strength of standard removable products
- Printed liner identifies the removable side
- Available in pre-cut pieces and continuous rolls
- Leaves no foam residue behind when removed
- Intended for one-time use on hard, non-delaminating surfaces

Continuous Roll, White

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 479037 | 1/32 | 1/2 | 216 | 24 |
| 479038 | 1/32 | 3/4 | 216 | 16 |
| 479039 | 1/32 | 1 | 216 | 12 |
| 479040 | 1/16 | 1/2 | 216 | 24 |
| 479041 | 1/16 | 3/4 | 216 | 16 |
| 479042 | 1/16 | 1 | 216 | 12 |

Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length ft | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 479043 | 1/32 | 1 | 1 | 6,000 |
| 479044 | 1/32 | 1 | 2 | 6,000 |
| 479045 | 1/32 | 1 | 3 | 2,500 |
| 479046 | 1/32 | 1 | 4 | 2,500 |
| 479047 | 1/32 | 1 | 6 | 2,000 |
| 479048 | 1/16 | 1 | 1 | 5,000 |
| 479049 | 1/16 | 1 | 2 | 5,000 |
| 479050 | 1/16 | 1 | 3 | 2,500 |
| 479051 | 1/16 | 1 | 4 | 2,000 |
| 479052 | 1/16 | 1 | 6 | 2,000 |
| 479053 | 1/8 | 1 | 1 | 5,000 |
| 479054 | 1/8 | 1 | 2 | 2,500 |
| 479055 | 1/8 | 1 | 3 | 2,000 |
| 479056 | 1/8 | 1 | 4 | 2,000 |

WHERE TO USE REMO ONE® PLUS

- Temporary signs
- Price channel mouldings
- Nameplates
- Shelf dividers
- Point of Purchase displays
- Metal shelving
- Merchandising racks

THICK REMO ONE®

REMOVABLE MOUNTING APPLICATIONS



THICK REMO ONE®

Removable foam block with aggressive permanent adhesive on one side and removable adhesive on the other, used to create 3-D effects

Specifications

- Adhesive: Permanent rubber-based on one side, removable adhesive on mounting side
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Intended for one-time use on hard, non-delaminating surfaces
- For lightweight applications or filling gaps

Pre-cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 470758 | 1/2 | 1 | 1 | 3,000 |
| 470760 | 1/2 | 1 | 2 | 1,800 |
| 470762 | 1/2 | 1 | 3 | 1,200 |

Pre-cut Pieces in a Pad, White

| Part Number | Thickness | Width | Length | Pieces/Pad | Pieces/Carton |
|-------------|-----------|-------|--------|------------|---------------|
| | in | in | in | | |
| 470759 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470768 | 3/4 | 1 | 1 | 36 | 4,320 |
| 470770 | 3/4 | 1 | 3 | 12 | 1,800 |
| 470773 | 1 | 1 | 1 | 36 | 6,012 |
| 470775 | 1 | 1 | 3 | 12 | 1,440 |
| 470784 | 1-1/2 | 1-1/2 | 1-1/2 | 12 | 1,440 |
| 470787 | 2 | 2 | 2 | 1 | 840 |

REMOVABLE MOUNTING APPLICATIONS



WHERE TO USE THICK REMO ONE®

- Promotional and temporary signage
- Temporary and permanent displays
- Single use graphics
- Wobblers and shelf talkers



TRY BEFORE YOU BUY!

Call or go online
to order free samples.

THICK REMO ONE®

REMOVABLE MOUNTING APPLICATIONS

Pre-cut Pieces on a Roll, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 470889 | 1/2 | 1 | 1 | 3,000 |

TEMPORARY DISPLAYS

CHANGEABLE GRAPHICS


SEMI PERMANENT DISPLAYS

REMOVABLE 1 SIDE

Pre-cut Pieces in a Pad, Black

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 470890 | 1/2 | 1 | 1 | 12 | 2,400 |
| 470904 | 1 | 1 | 1 | 36 | 6,012 |

Thick Remo One®

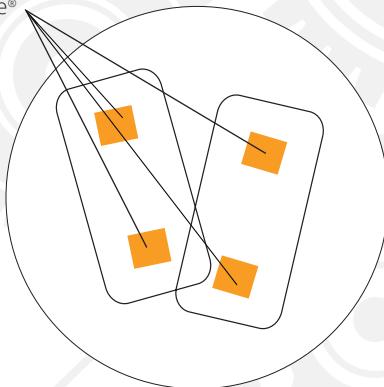

Place foam blocks 1" - 2" from the edge of dimensional graphics to create a clean 3-D effect.



TRY BEFORE YOU BUY!

Call or go online to order free samples.

REMO TWO® CLEAR

REMOVABLE MOUNTING APPLICATIONS



WHERE TO USE REMO TWO® CLEAR

- Promotional and temporary signage
- Single use graphics
- Temporary, plastic displays
- Clear acrylic displays

REMO TWO® CLEAR

Double-sided clear tape with a removable adhesive on both sides

Specifications

- Adhesive: Removable acrylic-based adhesive on both sides
- Application Temperature: 40°F to 175°F
- Service Temperature: 20°F to 180°F

Features

- Double-sided foam tape
- Removes cleanly from most hard, non-delaminating surfaces even after extended periods of time
- Intended for one-time use on hard, non-delaminating surfaces

Rolls

3" diameter core

| Part Number | Thickness | | Width | Length |
|-------------|-----------|----|-------|--------|
| | in | in | | |
| 477180 | 1/32 | | 1/2 | 216 |
| 477181 | 1/32 | | 3/4 | 216 |
| 477182 | 1/32 | | 1 | 216 |

Pre-Cut Pieces on a Roll

| Part Number | Thickness | | Width | Length | Pieces/Roll |
|-------------|-----------|----|-------|--------|-------------|
| | in | in | | | |
| 477183 | 1/32 | | 1 | 1 | 1250 |
| 477184 | 1/32 | | 1 | 2 | 1250 |
| 477185 | 1/32 | | 1 | 3 | 1000 |
| 477186 | 1/32 | | 1 | 4 | 1000 |

IT'S SIMPLE. JUST SAMPLE!

If you're not sure which tape will work best, you can request **FREE SAMPLES** to ensure proper fit and function.

CALL US NOW!

866 800 0775



REMOVABLE MOUNTING APPLICATIONS

 DURACO

REMO TWO®

REMOVABLE MOUNTING APPLICATIONS



REMO TWO®

Double-sided adhesive foam tape with our removable adhesive on both sides

Specifications

- Adhesive: Removable adhesive on both sides (not recommended in applications with direct UV exposure)
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- Holding Power: 1/2 lb. per sq. in. of tape (conditions and variables in applications can produce different stresses and affect holding power)
- Intended for one-time use on hard, non-delaminating surfaces

Pre-cut Pieces on a Roll, White

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 471089 | 1/32 | 1/2 | 1 | 10,000 |
| 471090 | 1/32 | 1/2 | 2 | 10,000 |
| 471091 | 1/32 | 1/2 | 3 | 5,000 |
| 471093 | 1/32 | 1/2 | 5 | 3,000 |
| 471097 | 1/32 | 3/4 | 3 | 5,000 |
| 471101 | 1/32 | 1 | 1 | 6,000 |
| 471102 | 1/32 | 1 | 2 | 6,000 |
| 471103 | 1/32 | 1 | 3 | 2,500 |
| 471104 | 1/32 | 1 | 4 | 2,500 |
| 471105 | 1/32 | 1 | 5 | 2,000 |
| 471125 | 1/16 | 1/2 | 1 | 10,000 |
| 471126 | 1/16 | 1/2 | 2 | 10,000 |
| 471132 | 1/16 | 3/4 | 2 | 5,000 |
| 471133 | 1/16 | 3/4 | 3 | 2,500 |
| 471040 | 1/16 | 1 | 1 | 5,000 |
| 471137 | 1/16 | 1 | 2 | 5,000 |
| 471041 | 1/16 | 1 | 3 | 2,500 |
| 471138 | 1/16 | 1 | 4 | 2,000 |
| 471139 | 1/16 | 1 | 5 | 2,000 |
| 471042 | 1/8 | 1 | 1 | 5,000 |
| 471169 | 1/8 | 1 | 2 | 2,700 |
| 471170 | 1/8 | 1 | 3 | 2,000 |
| 472887 | 1/4 | 1 | 1 | 5,000 |

WHERE TO USE REMO TWO®

- Promotional and temporary signage
- Single use graphics
- Consumer packaging
- In kits unattached to graphics

REMO TWO®

REMOVABLE MOUNTING APPLICATIONS

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 471107 | 1/32 | 1/2 | 1 | 10 | 7,500 |
| 471108 | 1/32 | 1/2 | 2 | 10 | 4,000 |
| 471119 | 1/32 | 1 | 1 | 10 | 4,000 |
| 471120 | 1/32 | 1 | 2 | 10 | 2,000 |
| 471121 | 1/32 | 1 | 3 | 10 | 1,250 |
| 471122 | 1/32 | 1 | 4 | 10 | 1,000 |
| 471123 | 1/32 | 1 | 5 | 5 | 750 |
| 471152 | 1/16 | 3/4 | 10 | 2 | 500 |
| 471153 | 1/16 | 1 | 1 | 10 | 4,000 |
| 471154 | 1/16 | 1 | 2 | 10 | 2,000 |
| 471155 | 1/16 | 1 | 3 | 10 | 1,250 |
| 471183 | 1/8 | 1 | 1 | 10 | 3,000 |
| 471184 | 1/8 | 1 | 2 | 10 | 1,500 |
| 471185 | 1/8 | 1 | 3 | 10 | 1,000 |

TEMPORARY DISPLAYS
CHANGEABLE GRAPHICS

SEMI PERMANENT DISPLAYS
REMOVABLE 2 SIDES



REMOVABLE MOUNTING APPLICATIONS

DURACO


SPRING SALE

BIG SAVINGS

On All New Sandals

Use Remo Two® to attach promotional or seasonal signs without damaging the walls.*

*Removes cleanly from most hard, non-delaminating surfaces.

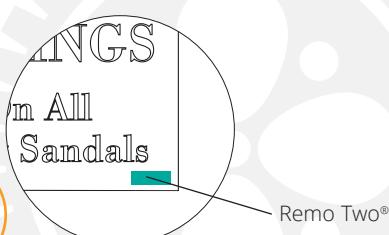

TIP

Use Remo Two® when packed out for in-store application to avoid wrong side use.

REMO TWO®

REMOVABLE MOUNTING APPLICATIONS



Short Rolls, White

1.5" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471474 | 1/32 | 1/2 | 30 | 72 |
| 471476 | 1/32 | 1 | 30 | 36 |
| 471477 | 1/16 | 1/2 | 30 | 40 |
| 471478 | 1/16 | 3/4 | 30 | 25 |
| 471479 | 1/16 | 1 | 30 | 20 |
| 471482 | 1/8 | 1 | 15 | 20 |

Standard Rolls, White

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471465 | 1/32 | 1/2 | 216 | 12 |
| 471466 | 1/32 | 3/4 | 216 | 16 |
| 471467 | 1/32 | 1 | 216 | 12 |
| 471468 | 1/16 | 1/2 | 216 | 12 |
| 471469 | 1/16 | 3/4 | 216 | 16 |
| 471470 | 1/16 | 1 | 216 | 12 |
| 471471 | 1/8 | 1/2 | 108 | 12 |
| 471472 | 1/8 | 3/4 | 108 | 16 |
| 471473 | 1/8 | 1 | 108 | 12 |

Standard Rolls, Black

3" diameter core

| Part Number | Thickness in | Width in | Length ft | Rolls/Carton |
|-------------|-----------------|-------------|--------------|--------------|
| 471483 | 1/32 | 1/2 | 216 | 12 |
| 471484 | 1/32 | 1 | 216 | 12 |
| 471485 | 1/16 | 1/2 | 216 | 12 |
| 471486 | 1/16 | 1 | 216 | 12 |

Always start with a
CLEAN SURFACE

- Dirty, dusty and oily surfaces will stop your tape from sticking



REMOVABLE MOUNTING APPLICATIONS

THICK REMO TWO®

REMOVABLE MOUNTING APPLICATIONS

THICK REMO TWO®

Double-sided adhesive foam block with removable adhesive on both sides, used to create 3-D effects

Specifications

- Adhesive: Removable on both sides
- Application Temperature: 65°F to 100°F
- Service Temperature: -20°F to 150°F
- For lightweight applications or filling gaps




Pre-Cut Pieces on a Roll, White

| Part Number | Thickness in | Width in | Length in | Pieces/Roll |
|-------------|-----------------|-------------|--------------|-------------|
| 471043 | 1/2 | 1 | 1 | 3,000 |

Pre-Cut Pieces in a Pad, White

| Part Number | Thickness in | Width in | Length in | Pieces/Pad | Pieces/Carton |
|-------------|-----------------|-------------|--------------|------------|---------------|
| 471044 | 1/2 | 1 | 1 | 12 | 2,400 |
| 471053 | 3/4 | 1 | 1 | 36 | 4,320 |

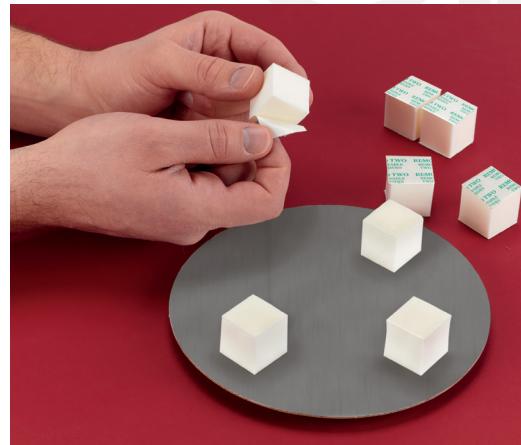

REMOVABLE MOUNTING APPLICATIONS



WHERE TO USE THICK REMO TWO®

- Promotional and temporary signage
- Temporary and permanent displays
- Single use graphics
- Wobblers and shelf talkers

THICK REMO TWO® REMOVABLE MOUNTING APPLICATIONS



Individual Pieces, White

| Part Number | Thickness in | Width in | Length in | Pieces/carton |
|-------------|-----------------|-------------|--------------|---------------|
| 471058 | 1 | 1 | 1 | 6,012 |
| 471060 | 1 | 1 | 3 | 1,440 |
| 471072 | 2 | 2 | 2 | 840 |

TIPS

- Attach temporary, lightweight graphics at location making them "stand out" on existing signs or displays.
- Try black Thick Remo Two® on dark backgrounds.
- Place foam blocks 1" – 2" from the edge of dimensional graphics to create a clean 3-D effect.



**When time is limited,
every second counts.**

So, we've extended our
same day shipping hours to better
meet your needs on in-stock products.

THICK REMO TWO®

REMOVABLE MOUNTING APPLICATIONS

Pre-Cut Pieces on a Roll, Black

| Part Number | Thickness | Width | Length | Pieces/Roll |
|-------------|-----------|-------|--------|-------------|
| | in | in | in | |
| 471188 | 1/2 | 1 | 1 | 3,000 |

TEMPORARY DISPLAYS

CHANGEABLE GRAPHICS

SEMI PERMANENT DISPLAYS

REMOVABLE 2 SIDES

Pre-Cut Pieces in a Pad, Black


| Part Number | Thickness | Width | Length | Pieces/Pad | Pieces/Carton |
|-------------|-----------|-------|--------|------------|---------------|
| | in | in | in | | |
| 471189 | 1/2 | 1 | 1 | 12 | 2,400 |

Individual pieces, Black

| Part Number | Thickness | Width | Length | Pieces/Carton |
|-------------|-----------|-------|--------|---------------|
| | in | in | in | |
| 471203 | 1 | 1 | 1 | 6,012 |



Use black foam blocks
on dark backgrounds
for a
clean
look.

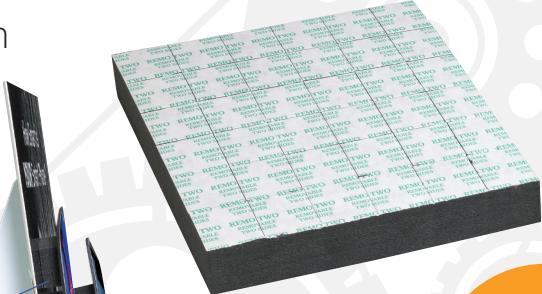

1/2" block

1" block



TRY BEFORE
YOU BUY!

Call or go online
to order free samples.

REMOVABLE MOUNTING APPLICATIONS



SR1 & SR5

REMOVABLE MOUNTING APPLICATIONS

SR1

Adhesive

A durable medium-peel removable acrylic adhesive that exhumes excellent peel and tack while maintaining smooth long-term removability from various substrates. The adhesive formulation provides superior anchorage to film or paper facestocks and has excellent heat, temperature, and UV exposure resistance.

APPLICATIONS

- Temporary decal products
- Pharmaceutical labels
- Removable laboratory labels
- Cleansing wipes closure
- Wide web advertising graphics
- Food rotation products
- Outdoor graphics

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS



SR5

Adhesive

A highly formulated ultra-removable acrylic adhesive exhibiting long-term removability without staining. The adhesive is uniquely designed to have low tack and peel on high-energy substrates while maintaining excellent anchorage to film facestocks and being resistant to various plasticizers, chemicals, heat, and UV.

APPLICATIONS

- Window signage
- Temporary decal products
- Automobile glass labelling
- Outdoor graphics
- Food rotation



**EXCEEDING YOUR
ADHESIVE EXPECTATIONS**

RE3 & RE5

REMOVABLE MOUNTING APPLICATIONS

RE3

Adhesive

A low-tack, ultra-removable adhesive designed for high-performance applications. The adhesive exhumes excellent anchorage to film facestocks while maintaining long-term removability and resistance to discoloration.

APPLICATIONS

- Temporary decals
- Window graphics
- Point-of-purchase displays
- Identification labels

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS

Explore 3 Sigma's
easy-to-use, reliable,
and long-lasting
removable adhesive
technology

RE5

Adhesive

An all-purpose, light-duty, removable adhesive designed to bond aggressive to low-energy textured surfaces such as foam, metal, and plastic. The adhesive exhibits high initial tack and adhesion while offering smooth removability and shear.

APPLICATIONS

- Plastic signage
- Graphic overlaminates
- Pouch seal/reseal
- Overlaminates
- Polycarbonate labelling



REMOVABLE MOUNTING APPLICATIONS



REP4 & REP16

REMOVABLE MOUNTING APPLICATIONS

REP4

Adhesive

A removable, repositionable microsphere acrylic adhesive uniquely designed as an economical choice for labeling newspapers, magazines, envelopes, and office forms. The adhesive is not intended for stain-free removal from high-energy surfaces such as polycarbonate or chrome and is best suited for use with paper-based facestocks.

APPLICATIONS

- News notes
- Direct mail advertisements
- Magazine advertisements
- Office form labelling

SEMI
PERMANENT
DISPLAYS

TEMPORARY
DISPLAYS

CHANGEABLE
GRAPHICS



REP16

Adhesive

An ultra-removable repositionable adhesive based upon microsphere technology. The adhesive offers quick adhesion to various film substrates and can be applied repeatedly with minimal loss of initial tack.

APPLICATIONS

- Temporary wall signage
- Repositionable labels
- Page tabs
- Manufacturing aids



937 440 3400

PRESSURE SENSITIVE LABELS

REMOVABLE MOUNTING APPLICATIONS

LWX049

Adhesive

A 2 mil bright white PET film with a digital matte laser coating on the face. The adhesive is a "shelf" that is ideal when the label is applied to a shelf or racking. The liner is a 6.8 mil PK Layflat laser sheet. This product is laser compatible, heat resistant, and water resistant. The digital top coat works well with IGEN, Nexpress, and other color lasers.

APPLICATIONS

- Shelving
- Temporary decals
- Window graphics
- Point-of-purchase displays



LWX074

Adhesive

A 3 mil bright white PET film with a digital matte laser coating on the face and featuring a laser safe mid-tack removable adhesive. The liner is a 4.6 mil super Layflat laser sheet. This product is laser compatible, heat resistant, and water resistant. The digital top coat works well with IGEN, Nexpress, and other color lasers including LED printers.

APPLICATIONS

- Metal shelving
- Floor graphics



LPPR051

Adhesive

A two mil clear BOPP flame treated product designed to be printable via flexo and/or thermal transfer. This product features a "cling" ultra-removable adhesive that cleanly removes from glass and other surfaces, and 40# SCK release liner. The BOPP offers water resistant and tear resistant properties.

APPLICATIONS

- Window decals

REMOVABLE RETAIL APPLICATIONS

StrataTac
Advanced Coating Technologies

PAPER RELEASE LINERS

RELEASE LINERS

Infinity offers a variety of paper, polyester, and polypropylene release liners. These smoothly releasing liners offer a range of qualities, including metallized film, high temperature resistance, antistatic properties, standard printing, custom printing, and color choices. Compatible with many types of adhesive, there is sure to be a release liner that perfectly fits your application.

42# PAPER LINER

A 42# paper liner coated on one side with easy release silicone.

- Key Benefits: Smooth release, compatible with many adhesives, offered with standard or custom printing.
- Release liner: 42# bleached SCK paper
- Coating: Coated on one side with easy release silicone



53# PAPER LINER

A 53# paper liner coated on one side with easy release silicone.

- Key Benefits: Smooth release, compatible with many adhesives, available with standard or custom printing.
- Release liner: 53# bleached SCK paper
- Coating: Coated on one side with easy release silicone

DID YOU KNOW?

Infinity Tapes offers a wide range of converting capabilities, including:

- Flexographic printing
- Silicone coating
- Hot melt adhesive coating up to 40"
- Slitting
- Spooling



CUSTOMIZE

- Standard Printing: "Remove Liner to Expose Adhesive"
- Custom Printing

FILM RELEASE LINERS

RELEASE LINERS

PET901 MET


A metallized polyester film release liner providing excellent smooth release.

- Key Benefits: Smooth release, compatible with many adhesives, eliminates static cling, offers the highest temperature resistance and highest strength of all plastic film release liners.
- Release liner: 1.0mil polyester metallized film
- Coating: Coated on metallized side with easy release coating

PET901

A clear polyester film coated on one side with easy release silicone and printed on the other side with the words, "Remove Liner to Expose Adhesive."

- Key Benefits: Easy release, custom printed wording and colors, compatible with many adhesives, highest temperature resistance and highest strength of all plastic film liners.
- Release liner: 1.0mil clear polyester film
- Coating: Coated on one side with easy release silicone, printed on the other side

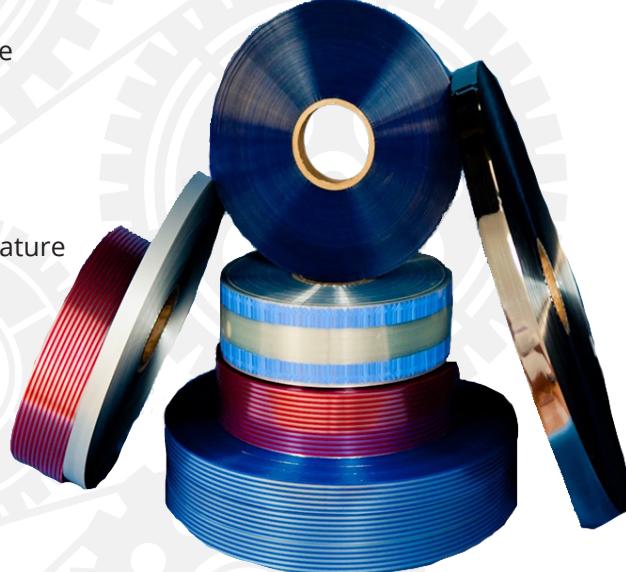

PP701.2 MET BOPP

A clear printed or unprinted metallized silicone coated antistatic film.

- Key Benefits: Smooth release, compatible with many adhesives, features anti-static properties, is available printed or unprinted.
- Release liner: 1.18mil metallized polypropylene film
- Coating: Coated on one side with easy release silicone



PP502

A clear printed or unprinted BOPP film coated on one side with easy release silicone and printed on the other with the words, "Remove Liner to Expose Adhesive."

- Key Benefits: Easy release, printed or unprinted options, custom printed wording, great strength, compatible with many adhesives.
- Release liner: 1.38mil clear BOPP film
- Coating: Coated on one side with easy release silicone, printed on the other side

PAPER RELEASE LINERS

RELEASE LINERS

Rayven offers release liners with many different release chemistries and a range of release values, ranging from easy to extra tight (10 gpi - 400 gpi), UV cured, and thermally cured releases. Rayven will match the chemistry to the application to yield the desired release performance. Substrate compatibility and heat resistance are also considered when choosing a silicone release coating.

SUPER CALENDARED KRAFT (SCK)

SCK release liners extend beyond traditional paper liners and are smoother than regular paper liners. This allows the ability to work with the majority of applicators making SCK a go-to option for product labels.

- Key Benefits: Polished liner for increased smoothness, highly compatible with many applicators, customizable
- Release liner: Super calendered kraft paper - 38#, 42#, 53#, 78#
- Coating: Silicone

POLY COATED KRAFT (PCK)

Release liners with a layer of polypropylene that ensures a more stable and sturdy liner. The addition of polypropylene acts as a moisture barrier, making this liner ideal for wine labeling.

- Key Benefits: Stable and sturdy performance, ideal for a lay-flat end product, good moisture resistance, great for industries familiar with paper release liners but need moisture resistance, customizable.
- Release liner: Poly coated kraft paper - 60#, 80#, 90#
- Coating: Silicone

CLAY COATED KRAFT (CCK)

Considered the "Economical Paper Liner," CCK release liners are ideal for the general industrial segment where customers prioritize a price point for their liner in the marketplace.

- Key Benefits: Inexpensive, great performance, customizable.
- Release liner: Clay coated kraft paper - 38#, 42#, 54#, 78#
- Coating: Solutions



FILM RELEASE LINERS

RELEASE LINERS

POLYESTER

Traditional PET release liners that are compatible with a wide variety of adhesives. These durable liners are difficult to tear or break and are ideal for high-speed applicators.

- Key Benefits: Many gauges to choose from, great tear resistance, ideal for high-speed applicators, good resilience when faced with difficult environments, weather, and moisture.
- Release liner: Polyester film - 92ga, 142ga, 200ga, 300ga, 400ga, 500ga
- Coating: Silicone

LOW-DENSITY POLYETHYLENE (LDPE)

LDPE release liners feature resilience and are challenging to tear or break. These liners are strong enough to withstand difficult environments and are great for use on end products exposed to weather and moisture.

- Key Benefits: Multiple liner thicknesses available, great tear resistance, withstand difficult environments.
- Release liner: Low-density polyethylene film - 1mil, 1.5mil, 2mil, 2.5mil, 3mil – 10mil
- Coating: Silicone

HIGH-DENSITY POLYETHYLENE (HDPE)

HDPE release liners are the perfect choice for applications requiring extra strength and durability. This strong film is resistant to tears and breaks and can withstand challenging environments.

- Key Benefits: Many liner thickness options, extremely strong and durable, resistant to tears and breaks, maintains performance despite difficult environments.
- Release liner: High-density polyethylene film - 1.5mil, 2mil, 2.5mil, 3mil – 10mil
- Coating: Silicone

POLYPROPYLENE

Polypropylene release liners are excellent for use with applications that are exposed to high temperatures and are compatible with a wide array of adhesives.

- Key Benefits: Multiple thickness choices, compatible with applications exposed to high temperatures, compatible with many adhesives.
- Release liner: Polypropylene film - 1.4mil, 1.6mil, 2mil, 3mil
- Coating: Silicone



DID YOU KNOW?

The general categories of silicone release coatings that Rayven uses are thermal curing and UV curing. Within these categories, Rayven has several silicone resins and carriers. The carriers can be solvent, water, or 100% solids where no carrier is needed.



GOING ABOVE AND BEYOND TOGETHER

TO GIVE YOU THE BEST TOP COATING SOLUTIONS





Coat.
Convert.
Customize.

-  TAPE EXPERTS
-  MADE TO ORDER
-  RAPID TURNAROUND
-  CUSTOM SOLUTIONS
-  CUSTOM CONVERTING



duraco.com | 866 800 0775 | sales@duraco.com

